


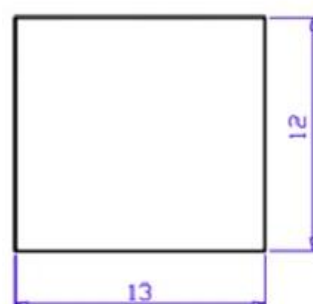
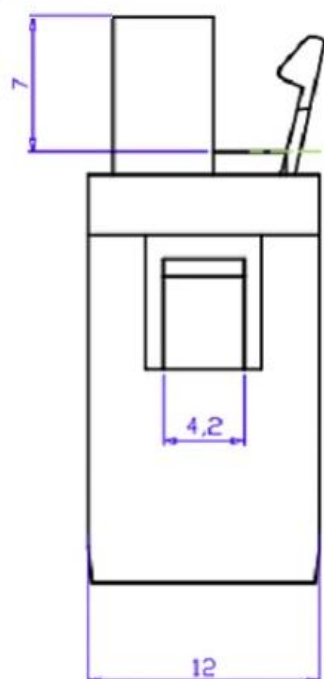
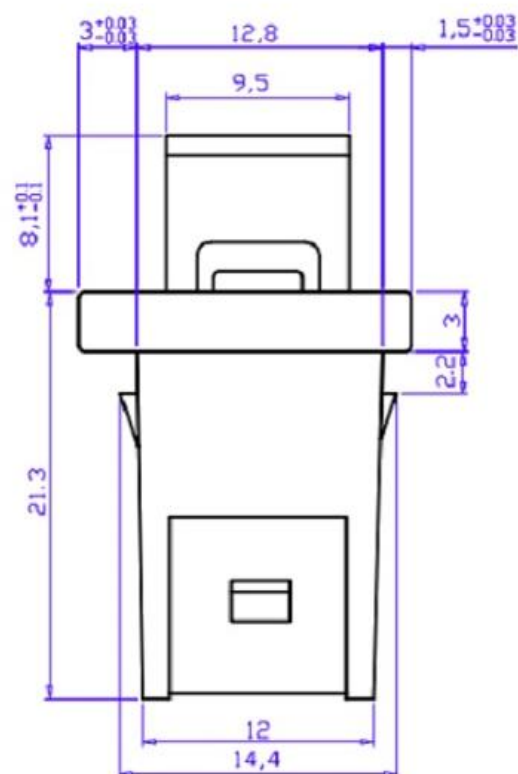
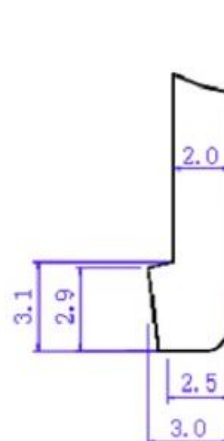


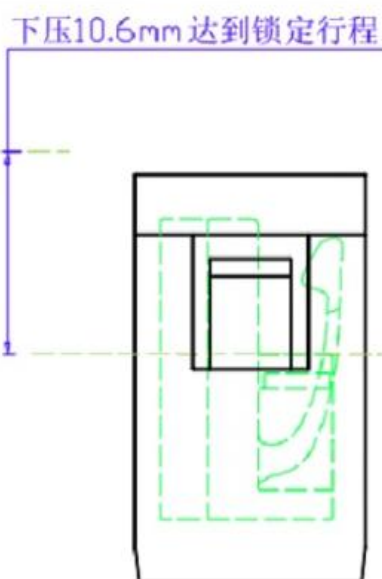


安装孔规格

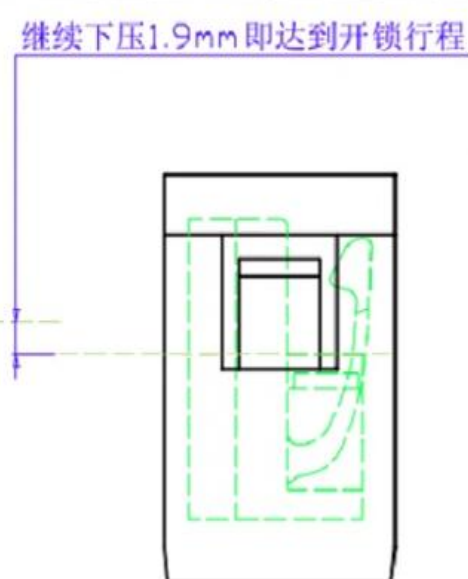

锁舌参考规格

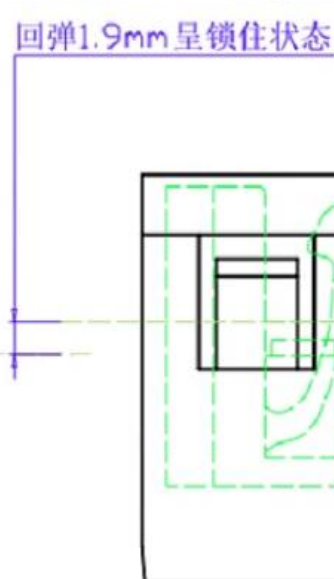

材料: 壳-PA(防火)
脚-PA(防火)
寿命: 2万次+
抗拉力: 50N(瞬时)

TITLE	DOOR LATCH SWITCH	DRAWN		TOLERANCE OTHERWISE UNLESS SPECIFIED		8				
PART NO.		CHECKED		UP TO 5	±0.2	7				
DRAW NO.	DL1	APPROVED		ABOVE 5 ~ 30	±0.3	6				
				ABOVE 30 ~ 50	±0.4	5				
				ABOVE 50	±0.5	4				
SCALE: 2:1	UNIT: mm	DATE:		ANGLE	±3'	3	SPRING	SUS	1	NI PLATED
 东莞市溪榜电子有限公司						2	HOUSING	POM	1	BLACK
						1	SLIDER	PA12	1	BLACK
						NO.	PARTS	MATERIAL	QTY.	FINISHING