

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 1000 Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
7. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;

PJ18-05 A B 03-10

① ② ③ ④

① PRODUCT SERIES:

PJ18: PHONE JACK CONNECTOR

② PIN NO. :






05: 5PIN

③ MATERIAL:


A: PA9T

④ SERIES NO. :


10: 正向沉板3.2H

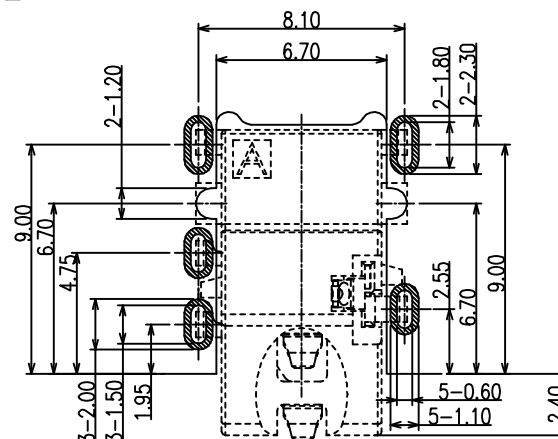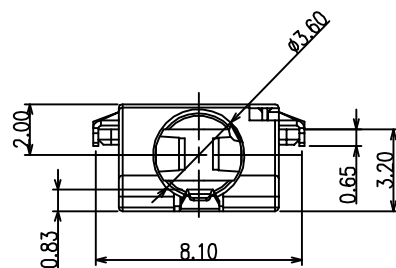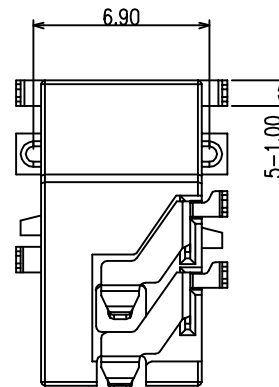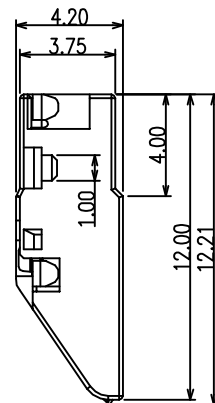


RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE)

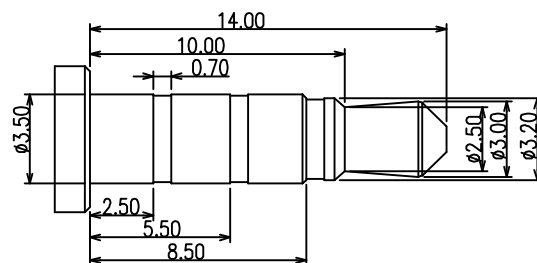

Ø3.50mm 4 POLE PLUG
DETAIL DRAWING(2:1)



CUSTOMER DRAWING	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.													
	DRAWING		DEYI			TITLE: Ø3.50mm PHONE JACK CONNECTOR TYPE2 正向沉板3.2H								
	APPROVED					P/N: XB-PJ18-05AB03-10								
	DATE		2018.04.30			DRAWING NO. XB-C-PJ18-10								
GENERAL TOLERANCE X. .X ±0.20 .XX ±0.15 .XXX ±0.10	ANGEL TOLERANCE X. ±3° .XX ±1° .XXX ±1°				UNIT	mm	SCALE	1:1	SIZE	A4	SHEET	1of1	REV	A