

REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		2012/05/25

NOTES :

1.0) RATING :

1.1. VOLTAGE : 12 VDC (R.M.S.)

1.2. CURRENT : 1 AMPERE MAXIMUM PER CONTACT AT 30°C T-RISE

1.3. TEMPERATURE : -25°C TO +85°C

2.0) ELECTRICAL CHARACTERISTIC

2.1. CONTACT RESISTANCE : INITIAL 50m MAX. AFTER 100m

2.2. INSULATION RESISTANCE : 100 M MIN.

2.3. DIELECTIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL

3.0) MECHANICAL :

3.1. DURABILITY ,MINIMUM: MATED 5000 CYCLES WITHOUT DEGRADING ELECTRICAL

3.2. INITIAL:MATING FORCE: 300g~2000g.UNMATING FORCE: 200g~2000g

3.3. AFTER LIFE TESTING:MATING FORCE: 300g~2000g.UNMATING FORCE: 200g~2000g

PRODUCT NO.

PJ27-06 A B 03-00

① ② ③ ④

① PRODUCT SERIES:

PJ27: PHONE JACK CONNECTOR

② PIN NO. :








06:6PIN

③ MATERIAL:

A: LCP

④ SERIES NO. :

00:反沉2.6, 前后插板, 中间贴板

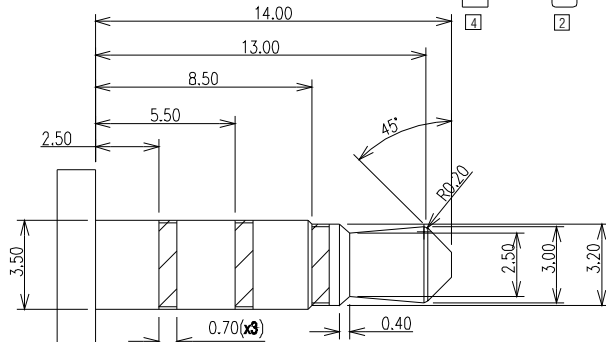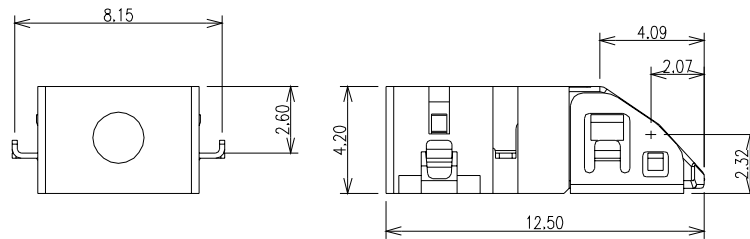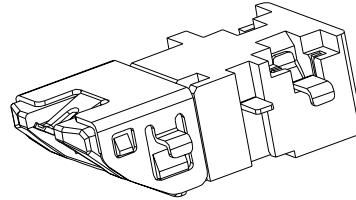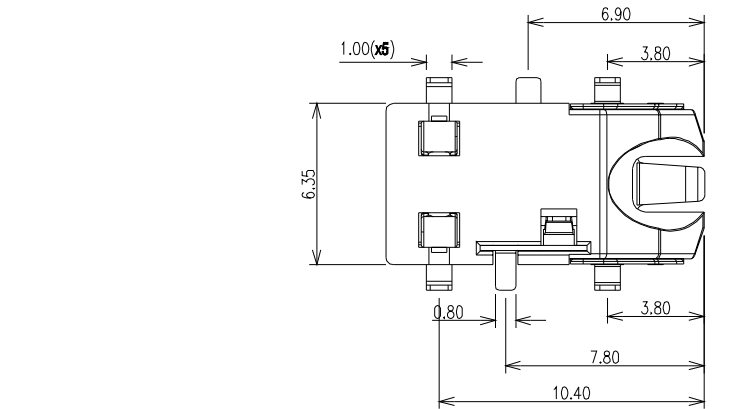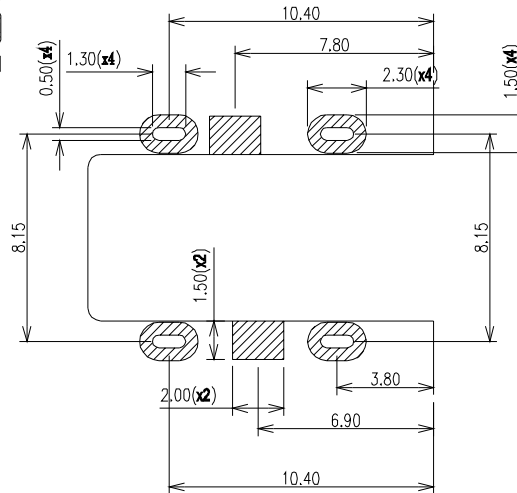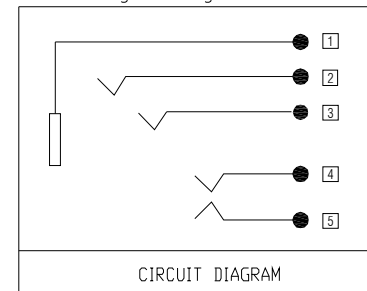

THE RECOMMENDED MATING AUDIO PLUG
3.5mm 4 POLE PLUG

CUSTOMER DRAWING GENERAL TOLERANCE X. ±0.20 .XX ±0.15 .XXX ±0.10 ANGEL TOLERANCE X. ±3° .XX ±2° .XXX ±1°	DRAWING	DEYI	TITLE: AUDIO JACK ø3.5mm 反沉2.6 SMT+DIP CONN			
	APPROVED		P/N: XB-PJ27-06AB03-00			
	DATE	2014. 01. 02	DRAWING NO. XB-C-PJ27-00			
	UNIT	mm	SCALE	1:1	SIZE	A4
				SHEET	1of1	REV
						A