REV	ECN #	DESCRIPTION	DRAWING	APPROVED	DATE
A		NEW RELEASE	DEYI		2012/05/25

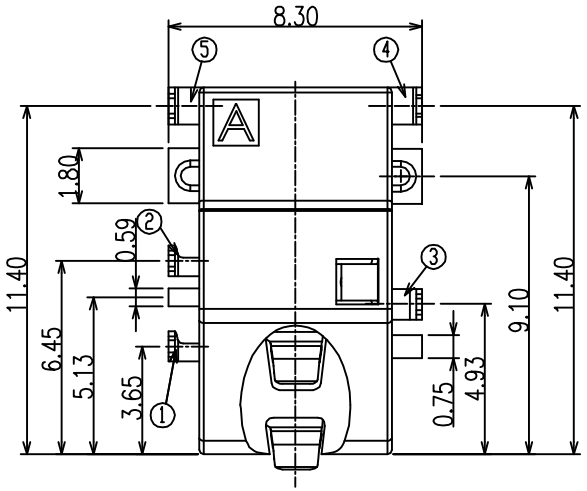

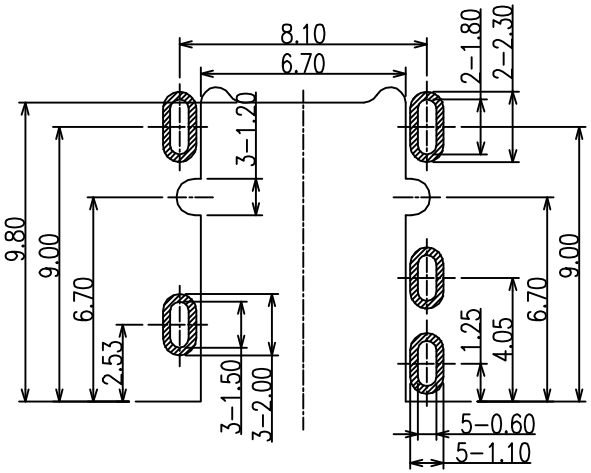

RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE±0.05)

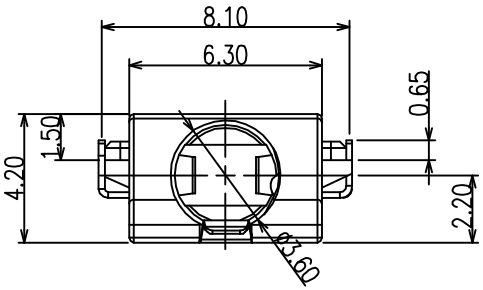

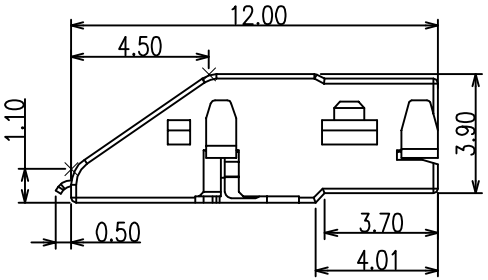

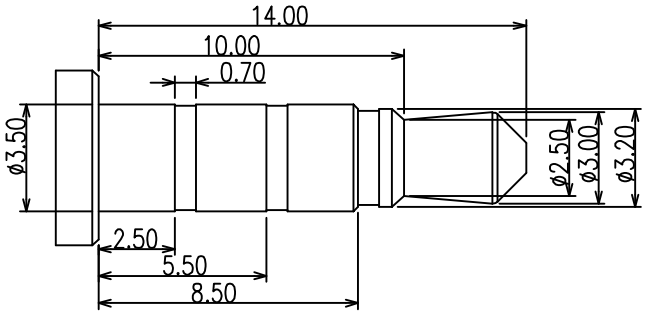

ø3.50mm 4 POLE PLUG
DETAIL DRAWING(2:1)





SCHEMATIC

NOTES:
1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 1000Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
7. CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;

PRODUCT NO.

PJ18-05 A B 03-05
① ② ③ ④

① PRODUCT SERIES:
PJ18: PHONE JACK CONNECTOR

② PIN NO.:
05: 5PIN

③ MATERIAL:
A: PA9T

④ SERIES NO.:
05:反向沉板1.5H

CUSTOMER DRAWING

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONI CS CO., LTD.

GENERAL TOLERANCE	X.
	.X ±0.20
	.XX ±0.15
	.XXX ±0.10
ANGEL TOLERANCE	X. ±3°
	.XX ±2°
	.XXX ±1°

DRAWING	DEYI
APPROVED	
DATE	2015.11.06

TITLE: ø3.50mm PHONE JACK CONNECTOR TYPE1反向沉板1.5H
P/N: XB-PJ18-05AB03-05
DRAWING NO. XB-C-PJ18-05

UNIT	mm	SCALE	1:1	SIZE	A4	SHEET	1of1	REV	A