


Note:


- 1.Contact Current Rating:12V 1A.
- 2.Contact Resistance:50m Ω MAX.
- 3.Insulation Resistnace:100M Ω Min.500V DC.
- 4.Dielectric Withstande:500V AC Min.
- 5.Durability:5000 Cycles Min.
- 6.Connector Mating Forces:29.4N(3.00Kgf) MAX.
- 7.Connector Unmating Forces:2.94N(0.30kgf) Min.
- 8.The Product Machine With A GAP That:The Finished Machine With Socket Before/Up/Down/Left/Right Side Of 5,Protection GAP First Proposed,The Desing OF 0.15mm.
- 9.J303B06G1WXL2

O: ORANGE  
Z: BLACK

**RECOMMENDED PCB LAYOUT(TOP VIEW)**  
(GENERAL TOLERANCE ±0.05)

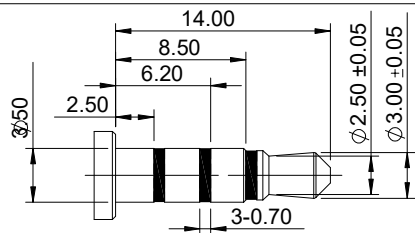

PLUG SPEC

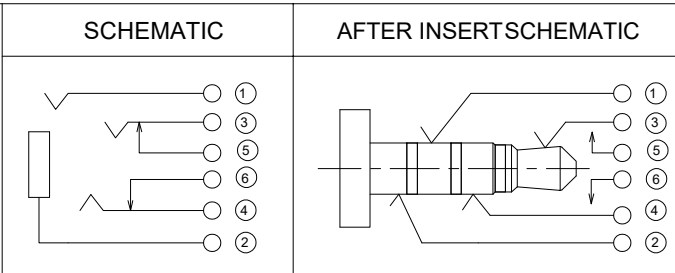

7	HOUSING	HIGH TEMP	BLACK	
6	TERMINAL 6	COPPER ALLOY		Au PLATED
5	TERMINAL 5	COPPER ALLOY		Au PLATED
4	TERMINAL 4	COPPER ALLOY		Au PLATED
3	TERMINAL 3	COPPER ALLOY		Au PLATED
2	TERMINAL 2	COPPER ALLOY		Au PLATED
1	TERMINAL 1	COPPER ALLOY		Au PLATED
NO.	DESCRIPTION	MAT.L	COLOR	REMARK

**XB** 东莞市溪榜电子有限公司  
DONG GUAN XI BANG ELECTRONI CS CO., LTD.

TITLE: Ø3.50 mm PHONE JACK CONNECTOR

PART NO. XB-J303WB06GF

PRODUCT SPEC. XB-RD-W06

FILE NAME. J303WB06GF

SCALE 4:1 UNIT:mm A4 SHEET: 1 of 2

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	DESIGN	张斌	03/06/18
	A	03/06/18	A版发行			Angle ±2° X ±0.35 .X ±0.25 .XX ±0.20	CHECK	杨成武	03/06/18
							APPRO.	杨成武	03/06/18