


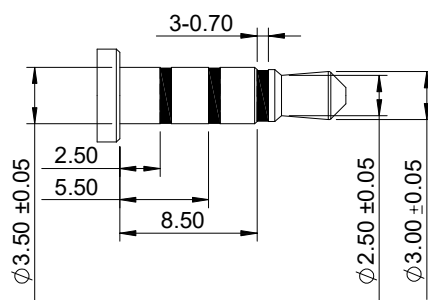
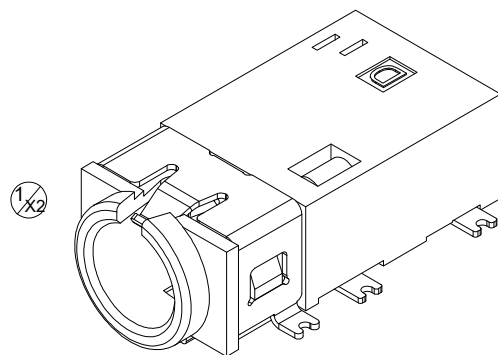
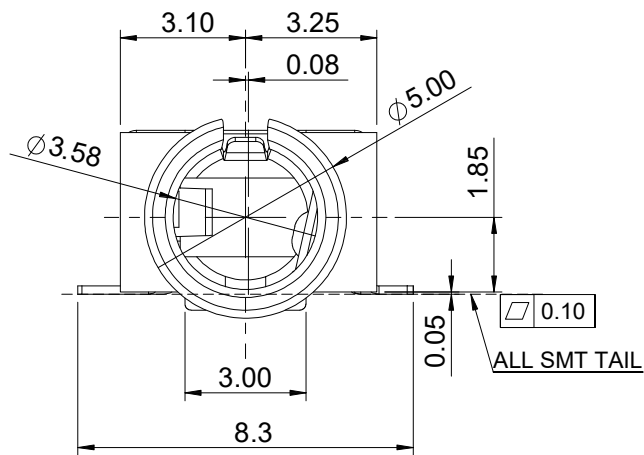


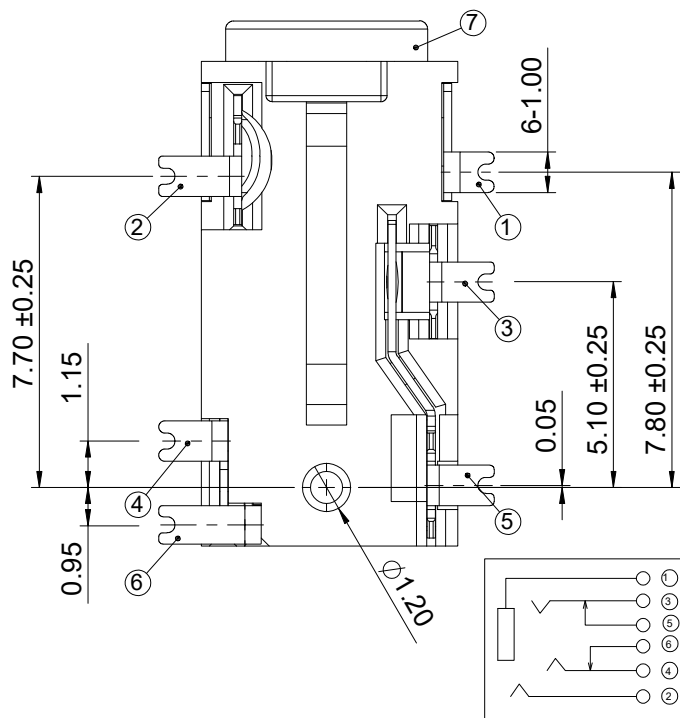

3.50mm 4 POLE PLUG
DETAIL DRAWING(2:1)

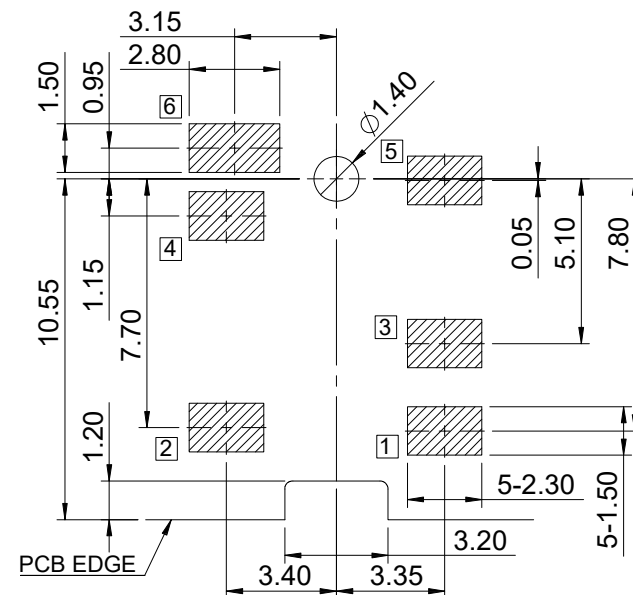

SCHEMATIC

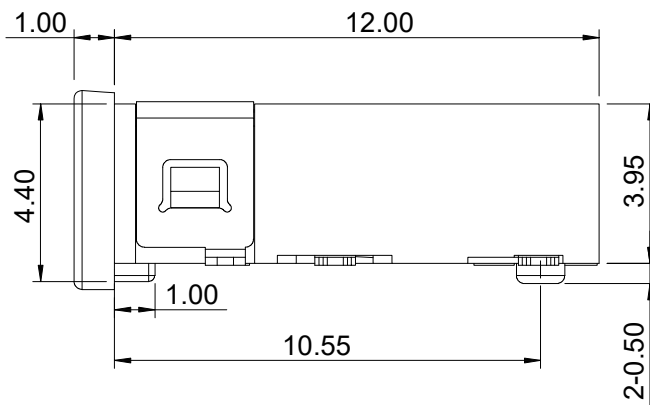

RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE ±0.05)

NOTES:

- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 mΩ MAX.;
- INSULATION RESISTANCE: 100MΩ MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES:
29.4N (3.00Kgf) MAX.;
- CONNECTOR UNMATING FORCES:
2.94N(0.30Kgf) MIN.;

7	HOUSING	HIGH TEMP	BLACK	
6	TERMINAL 6	COPPER ALLOY	————	Au PLATED
5	TERMINAL 5	COPPER ALLOY	————	Au PLATED
4	TERMINAL 4	COPPER ALLOY	————	Au PLATED
3	TERMINAL 3	COPPER ALLOY	————	Au PLATED
2	TERMINAL 2	COPPER ALLOY	————	Au PLATED
1	TERMINAL 1	COPPER ALLOY	————	Au PLATED
NO.	DESCRIPTION	MAT,L	COLOR	REMARK



TITLE: 3.50 mm PHONE JACK CONNECTOR

PART NO. XB-J303YB06GA002

PRODUCT SPEC. XB-RD-W06

C FILE NAME. J303YB06GF

SCALE 5:1 UNIT:mm A4 SHEET: 1 of 2

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO.	DATE
	X1	10/09/18	新版发行			Angle ±2° X ±0.35 .X ±0.25 .XX ±0.20	DESIGN ZHANGBIN	10/09/18
							CHECK YANGCHENGWU	10/09/18
							APPRO. YANGCHENGWU	10/09/18