

A

B

C

D


E

F

G




H

| REV. | ECN NO. | DATE | DEFINITION | DRAW | APPROVE |
|------|---------|------|------------|------|---------|
| | | | | | |

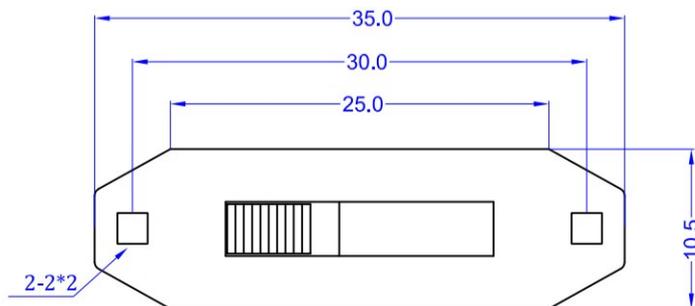

Notes

1. Model NO.: XB-H25-0324SC
2. Rating: 3(3)A 125/250VAC
3. Contact resistance: $\leq 100 \text{ m}\Omega$
4. Insulation resistance: $\geq 100 \text{ M}\Omega$ (DC500V/Min)
5. Electronics life: > 10000 cycles
6. Solder ability of terminal: Max 350°C 3s
7. Operation force: $500 \pm 250 \text{ gf}$
8. All materials are Rohs compliant

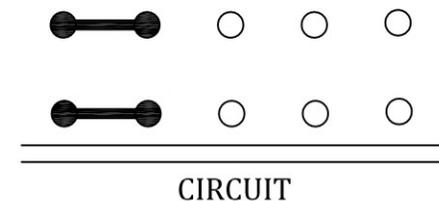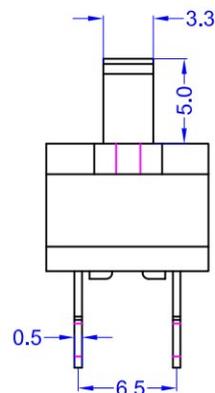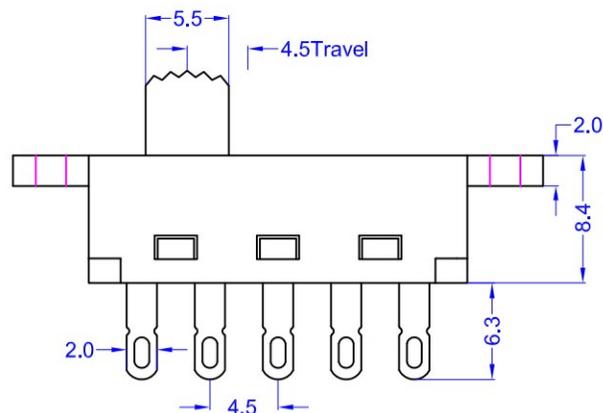

3(3) 125/250VAC



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

| | | | | | | | |
|--------------------------|-----------------|-----------|-----------|-----|-------------|-------------------------------|--------------|
| DRAWN | <i>Jimmy</i> | 180607 | SCALE | 1:1 | DESCRIPTION | SLIDE SWITCH 3(3)A 125/250VAC | |
| CHECKED | <i>Jimmy</i> | 180607 | SHEET | 1/1 | TITLE | SLIDE SWITCH | |
| APPROVED | <i>Jimmy</i> | 180607 | UNIT | mm | PART NO. | XB-H25-0324SC(有耳) | |
| TOLERANCE | $0 < L \leq 5$ | ± 0.1 | PROJECTED | | SIZE | A4 | ENG DRAW NO. |
| | $5 < L \leq 30$ | ± 0.2 | | | | | |
| | $L > 30$ | ± 0.3 | | | | | |
| ANGLES \sphericalangle | $\pm 2^\circ$ | | | | 2018081711 | | |

A

B

C

D

E

F

G

H

1

2

3

4

5

6

1

2

3

4

5

6