


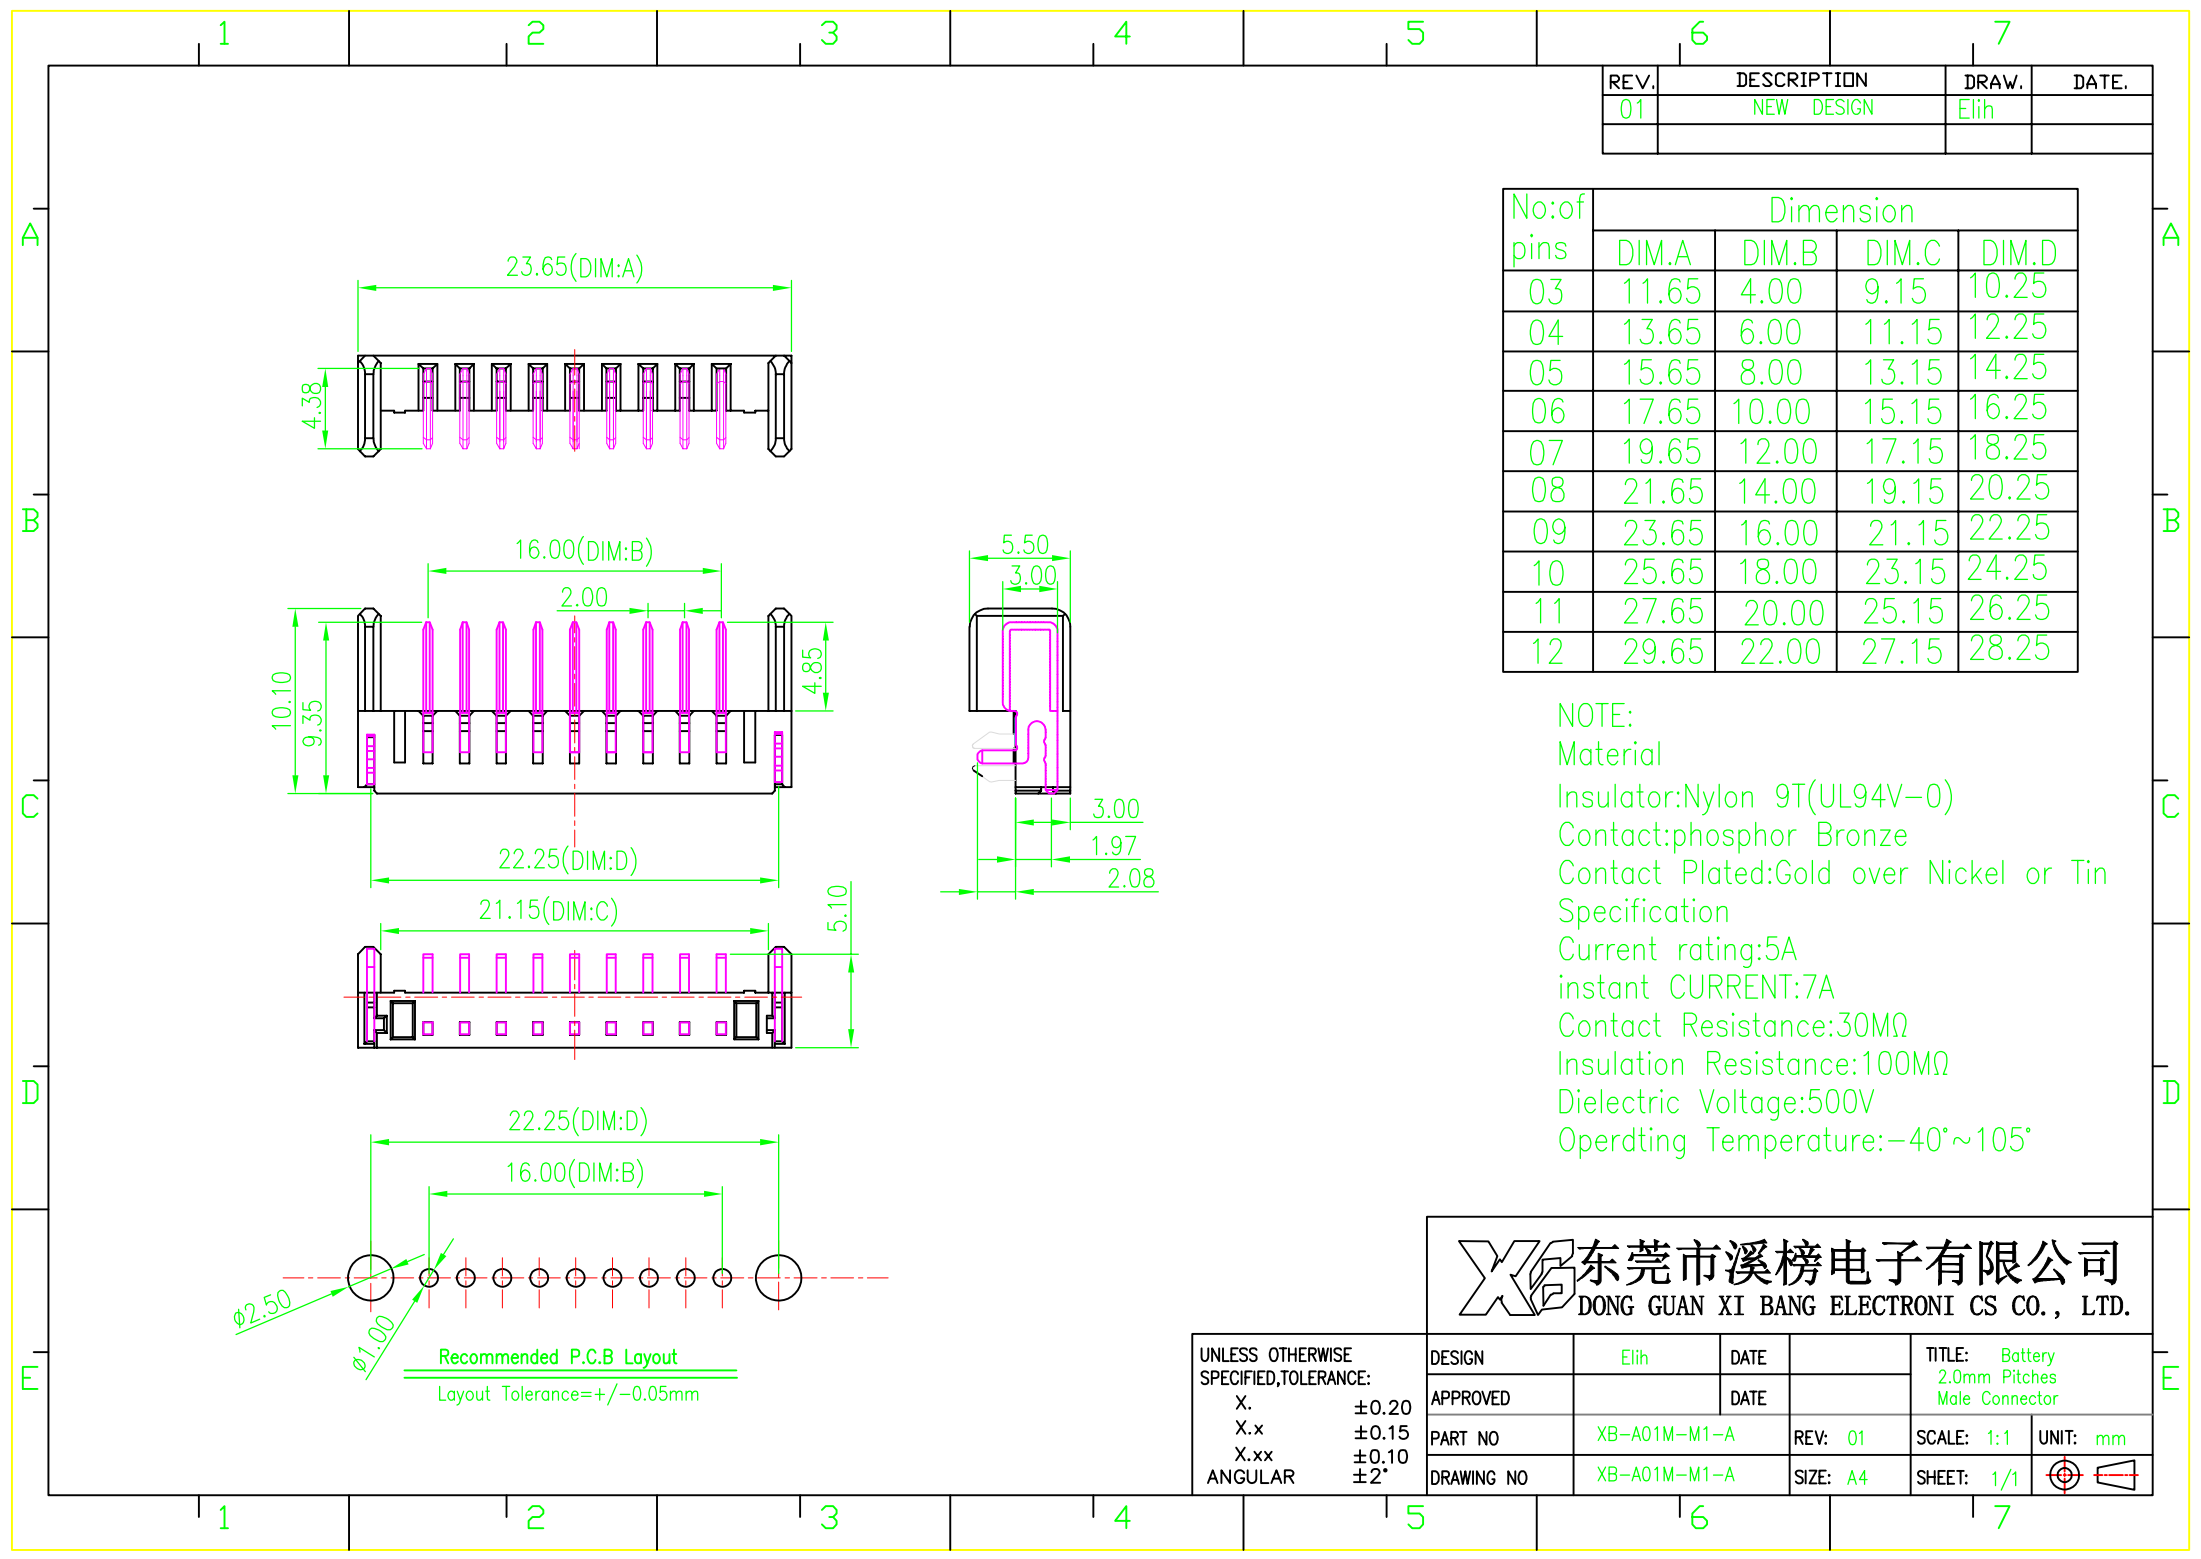

REV.	DESCRIPTION	DRAW.	DATE.
01	NEW DESIGN	Elih	

No:of pins	Dimension			
	DIM.A	DIM.B	DIM.C	DIM.D
03	11.65	4.00	9.15	10.25
04	13.65	6.00	11.15	12.25
05	15.65	8.00	13.15	14.25
06	17.65	10.00	15.15	16.25
07	19.65	12.00	17.15	18.25
08	21.65	14.00	19.15	20.25
09	23.65	16.00	21.15	22.25
10	25.65	18.00	23.15	24.25
11	27.65	20.00	25.15	26.25
12	29.65	22.00	27.15	28.25

NOTE:
Material
Insulator:Nylon 9T(UL94V-0)
Contact:phosphor Bronze
Contact Plated:Gold over Nickel or Tin
Specification
Current rating:5A
instant CURRENT:7A
Contact Resistance:30M Ω
Insulation Resistance:100M Ω
Dielectric Voltage:500V
Operdting Temperature:-40 $^{\circ}$ ~105 $^{\circ}$

XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.				
DESIGN	Elih	DATE	TITLE: Battery	
APPROVED		DATE	2.0mm Pitches	
PART NO	XB-A01M-M1-A	REV: 01	SCALE: 1:1	UNIT: mm
DRAWING NO	XB-A01M-M1-A	SIZE: A4	SHEET: 1/1	

UNLESS OTHERWISE SPECIFIED,TOLERANCE:	
X.	± 0.20
X.x	± 0.15
X.xx	± 0.10
ANGULAR	$\pm 2^{\circ}$