


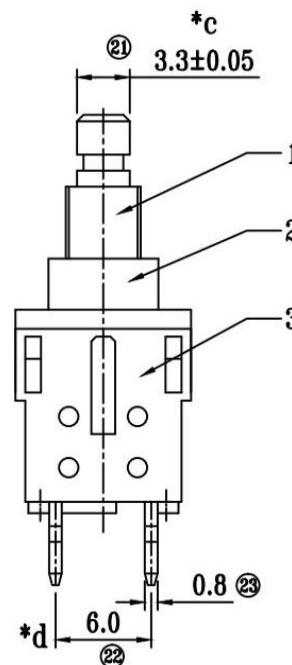


CAD FILE:

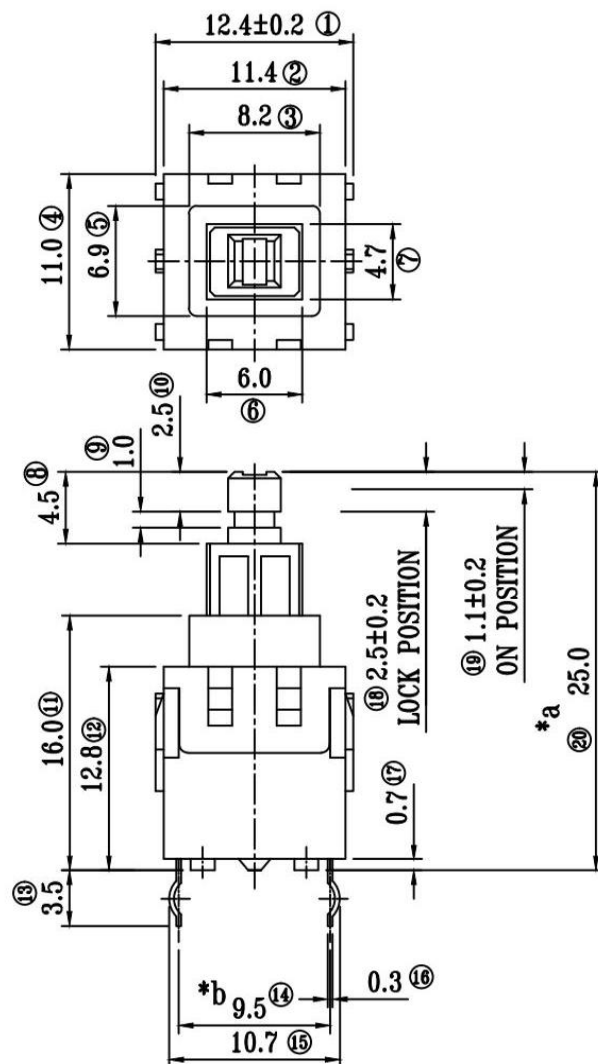

SCHEMATIC



P.C.B LAYOUT

规格 Specifications:

额定负荷 Rating	DC 12V 1mA
初始接触电阻 Contact Resistance	30MΩ Max
绝缘电阻 Insulation Resistanc	100MΩ Min
抗电强度 Dielectric Voltage	AC 500V (50-60Hz) 60±5
操作力 Operating Force (gf)	350±150gf
寿命 Life test	10,000 cycles

注：“*”表示重点尺寸(4个)

NO.	PARTS	MATERIALS	Q'TY	FINISH	TOLERANCE UNLESS SPECIFIED	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
8					WITHIN 1.5mm : ±0.1mm				
7	TERMINAL	PBS C5210R-H	1	Ag PLATED OVER Ni PLATED	BETWEEN 1.5mm-10mm : ±0.3mm	B	18-02-2017	增加“AS”标识	
6	SPRING	SUS 304	1	NATURAL	OVER 10mm : ±0.5mm	ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
5	CONTACT	PBS C52100-SH	2	Ag PLATED	TITLE : VERTICAL PUSH SWITCH				
4	CAM STICK	SUS 304	1	WASHING	MODEL: XB-PB-22E32				
3	CASE	PBT-2230-90/PBS C5210R-H	1	BLACK/Ag PLATED OVER Ni PLATED	DONG GUAN XI BANG ELECTRONICSCO., LTD				
2	COVER	PBT 301-G15	1	BLACK	SCALE: 1:1				
1	KNOB	PA66 G7S	1	BLACK	DRWG NO. : WM-DR-PB22E32-00(AS)				
					DWN. 余紫楨 18-02-2017				
					CHK'D 赵福希 18-02-2017				
					APPD. 刘勇刚 18-02-2017				