

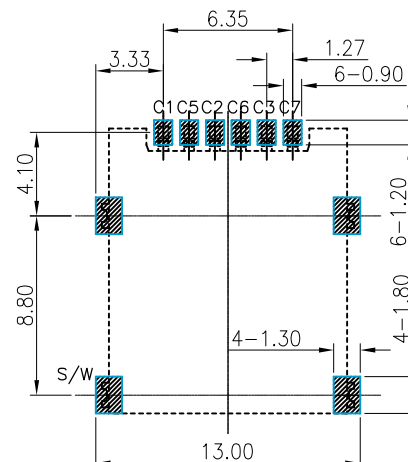
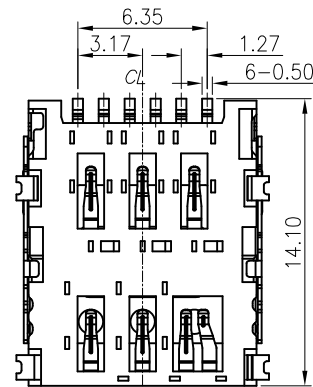
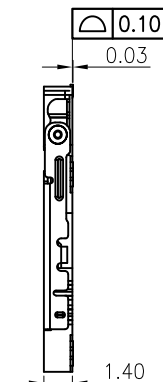


RoHS



REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
AO		NEW RELEASE	07/12'16	YZZ		HAIYONG

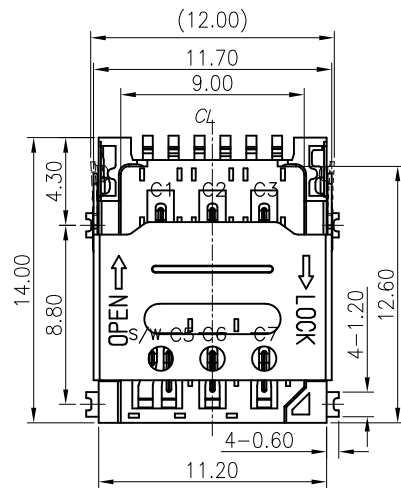

RECOMMENDED PCB LAYOUT
TOLERANCE ± 0.05
SMT SOLDER AREA



PIN NO.	PIN NAME
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O
S/W	Switch Pin

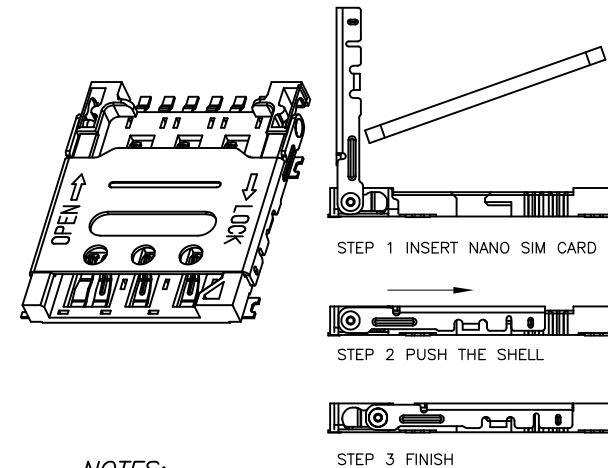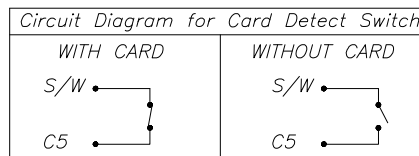

NOTES:

1. MATERIAL:


- 1.1 Housing: High Temperature Thermoplastic UL94V-0; Color Black.
- 1.2 Terminal: Copper Alloy, $T=0.12\text{mm}$.
- 1.3 Shell: Stainless Steel, $T=0.20\text{mm}$.

2. FINISH:

- 2.1 Terminal: Plated Gold on the Contact Area and Solder Tails
- 2.2 Peg: Plated Gold on the Solder Tails.

3. SPECIALITY:

- 3.1 Rated current: 0.5A
- 3.2 Rated voltage: 50V
- 3.3 Contact Resistance: $80\text{m}\Omega$ MAX
- 3.4 Insulation Resistance: $100\text{M}\Omega$ MIN 100V DC
- 3.5 Dielectric withstanding voltage: 100V AC.
- 3.6 Solder ability: $245\pm 5^\circ\text{C}$, $5\pm 0.5\text{s}$.
- 3.7 Operating condition: Temperature: -30°C $+80^\circ\text{C}$
Humidity: 80% R.H MAX

MILLIMETERS	INCH	UNITS MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.									
X° ± 2'	X° ±	MAT'L	PART NUMBER: XB-402013032-A		TITLE: 1. 4H NANO SIM CARD 7PIN(掀盖式)							
.X ±0.30	.XX ±	SEE NOTES										
.XX ±0.25	.XXX ±	FINISH	APPD: HAIYONG		DWG NO.: C-402013032-00							
.XXX±0.15	.XXXX±	SEE NOTES	CHKD: --		<table><tr><td>SCALE</td><td>SHEET</td><td>REV.</td></tr><tr><td>1:1</td><td>1/2</td><td>A0</td></tr></table>		SCALE	SHEET	REV.	1:1	1/2	A0
SCALE	SHEET	REV.										
1:1	1/2	A0										
		QTY	DR: YZZ									
		SEE NOTES										