

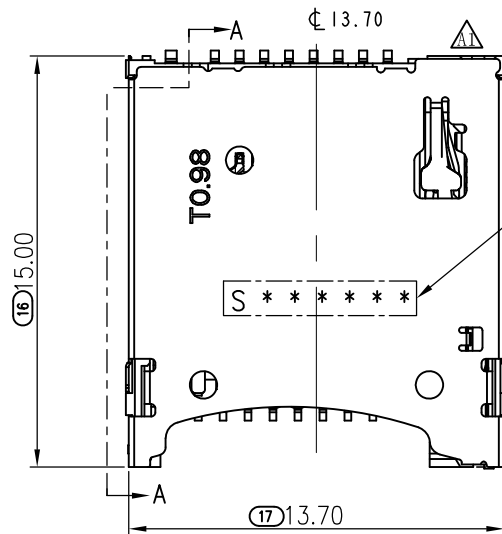
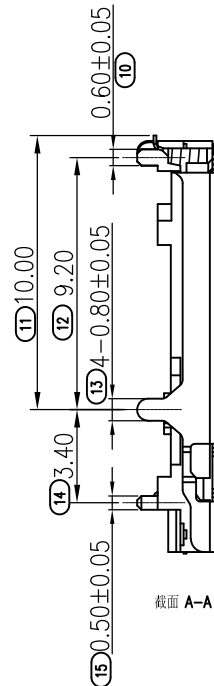
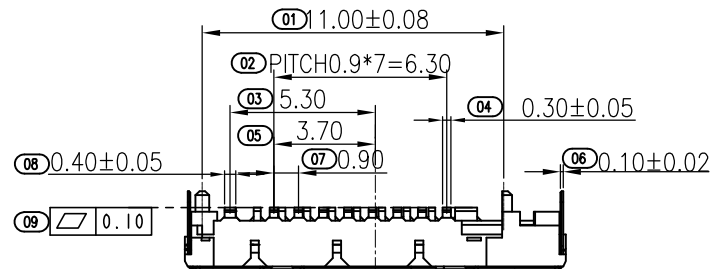


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A3	ECN1809021	修改卷带PITCH及宽度	09/17'18	WZX		LHY

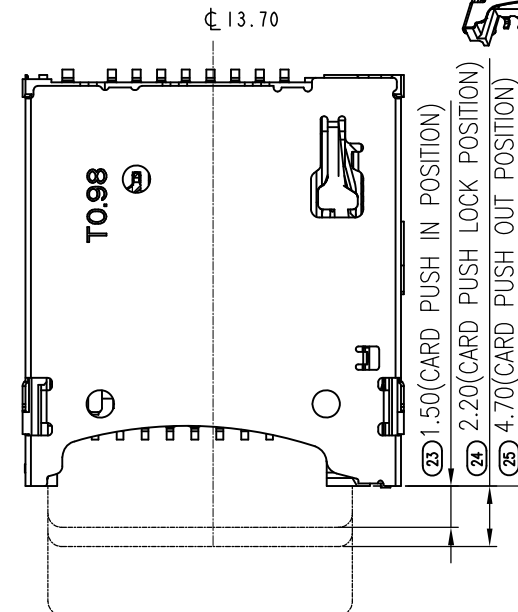


SPURT THE
DATE CODE

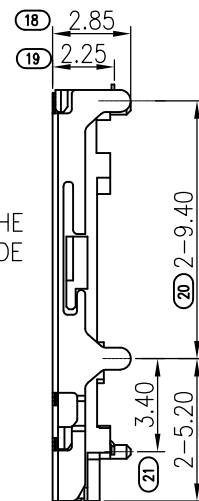


TOP VIEW


DATE CODE说明: S * * * * *

星期:01表示星期一
.....
07表示星期天
周:01表示第一周
.....
12表示第十二周
年:17表示2017年

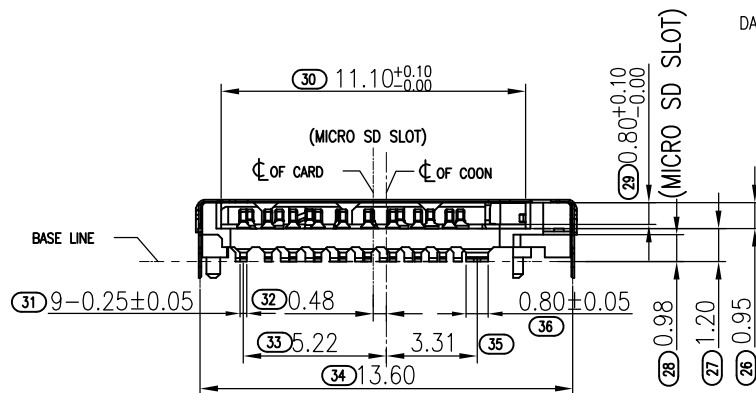

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.										
X° ± 2°	X° ± 2°	MAT'L	PART NUMBER: 102031522		TITLE: MicroSD 4.0 H2.25卡座								
.X ±0.30	.XX ±0.012	SEE NOTES											
.XX ±0.20	.XXX ±0.008	FINISH	APPD:		DWG NO.: C-102031522-00								
.XXX±0.10	.XXXX±0.004	SEE NOTES	CHKD:		 <table><tr><td>SCALE</td><td>SHEET</td><td>REV.</td></tr><tr><td>1:1</td><td>1/3</td><td>A3</td></tr></table>			SCALE	SHEET	REV.	1:1	1/3	A3
SCALE	SHEET	REV.											
1:1	1/3	A3											
		QTY	DR:										
		SEE NOTES											

RoHS

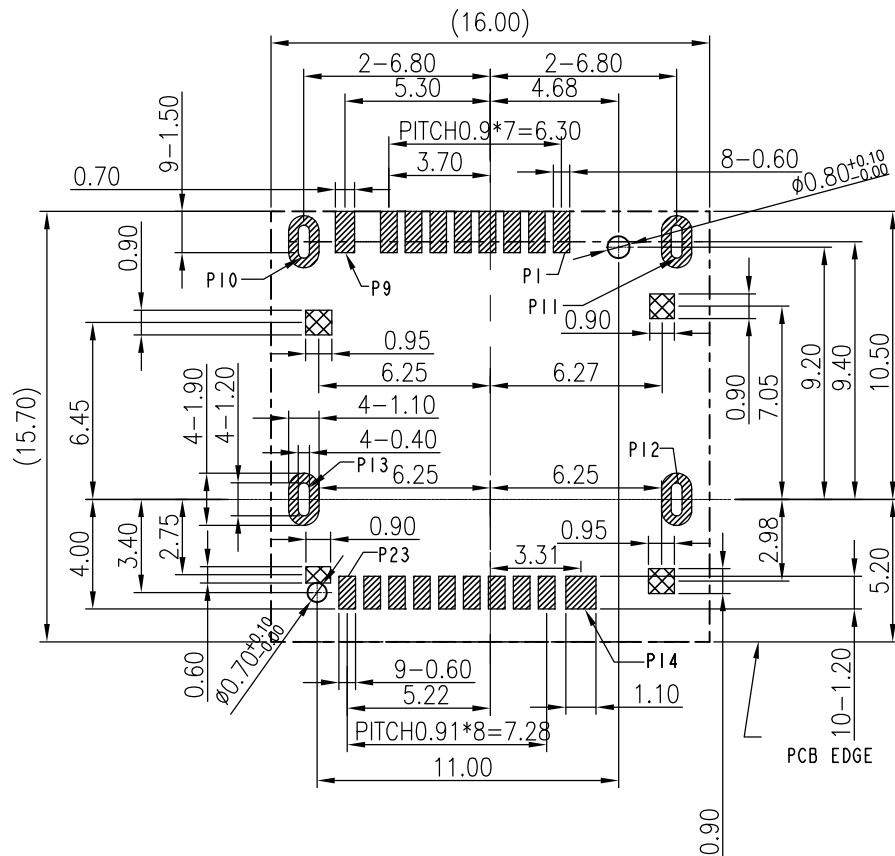


Recommended P.C.B LAYOUT
TOP VIEW (TOLERANCE ± 0.05)



Opening/Close of Switch

	Card Detect Switch	
Card Uninsertion	Open	
Card Half Insertion	Open	
Card Insertion	Close	
N/O	Open	Close
	P6 P9	P6 P9


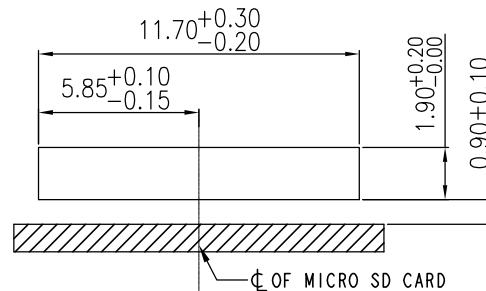


RECOMMEND ID DIMENSION

NOTES:


- (1) MATERIAL:
1-1. PLASTIC: LCP, THERMOPLASTIC UL 94V-0
COLOR: BLACK.
1-2. CONTACT: COPPER ALLOY.
1-3. SHELL: STAINLESS STEEL.
- (2) PLATING:
2-1. CONTACT:
2-1-1. CONTACT AREA: Au 30u", OVER Ni 50u".
2-1-2. SOLDER TAIL AREA: Matted TIN 80u" Min. OVER Ni 50u".
2-2. SHELL:
2-2-1. SOLDERABILITY: OVER PLATING Ni 50" OVER ALL.
- (3) CONTACT AND TAIL COPLANARITY TO BE 0.10mm MAX

Pin No.	Pin Assignment
P1	MICRO SD DAT2
P2	MICRO SD CD/DAT3
P3	MICRO SD CMD
P4	MICRO SD VDD1
P5	MICRO SD CLK
P6	MICRO SD VSS
P7	MICRO SD DAT0/RCLK
P8	MICRO SD DAT1/RCLK
P9	MICRO SD CD
P10	GND
P11	GND
P12	GND
P13	GND
P14	GND
P15	MICRO SD VDD2
P16	MICRO SD SWIO
P17	MICRO SD VSS
P18	MICRO SD D0+
P19	MICRO SD D0-
P20	MICRO SD VSS
P21	MICRO SD DI-
P22	MICRO SD DI+
P23	MICRO SD VSS

MILLIMETERS	INCH	UNITS	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
X° ± 2°	X° ± 2°	MAT'L					
.X ±0.30	.XX ±0.012	SEE NOTES	PART NUMBER:	TITLE:			
.XX ±0.20	.XXX ±0.008	FINISH	102031522	MicroSD 4.0 H2.25卡座			
.XXX ±0.10	.XXXX±0.004	SEE NOTES	APPD:	DWG NO.:			
		QTY	CHKD:	C-102031522-00			
		SEE NOTES	DR:		SCALE	SHEET	REV.
					1:1	2/3	A3

RoHS

USER DIRECTION OF UNREELING

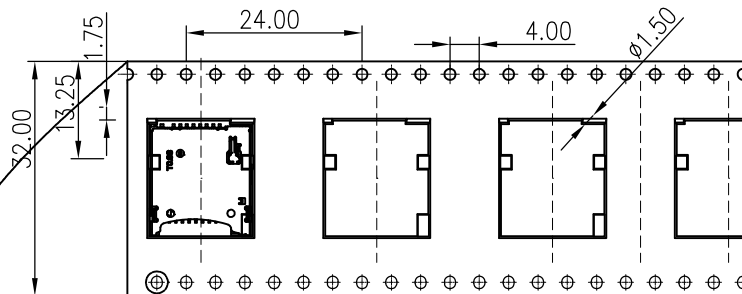


COVER TAPE PEELING ANGLE:165°~180°
PEELING FORCE:20~130g

CARRIER TAPE

User Direction of Unreeling

NOTES


1. NUMBER OF CONNECTORS:800PCS/REEL
2. LEAD TAPE LENGTH

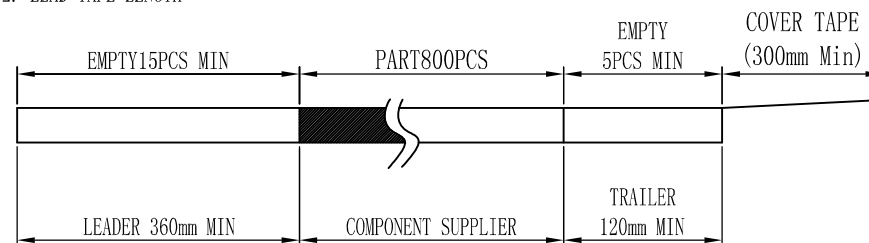

3. QUANTITY:6400PCS/CARTON

DETAIL B

DETAIL B

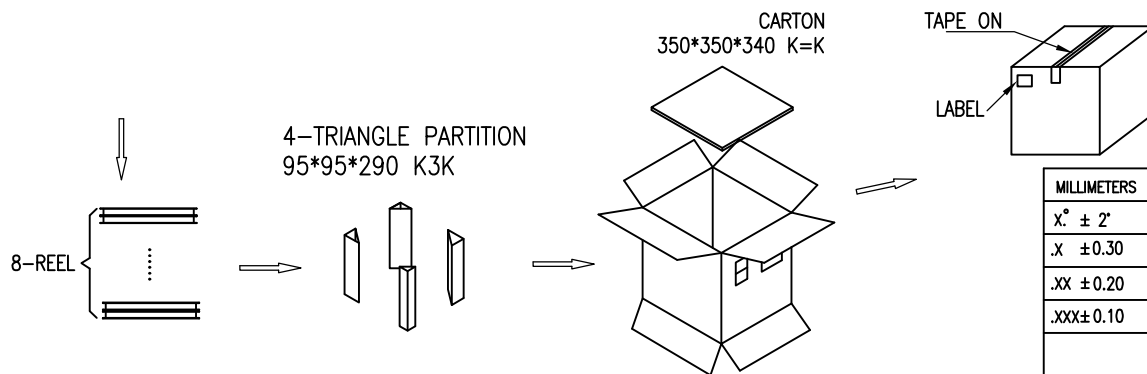

MILLIMETERS	INCH	UNITS	MM	XIB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2°	X° ± 2°	MAT'L		PART NUMBER: 102031522		TITLE: MicroSD 4.0 H2.25卡座	
.X ± 0.30	.XX ± 0.012	SEE NOTES		APPD:		DWG NO.: C-102031522-00	
.XX ± 0.20	.XXX ± 0.008	FINISH		CHKD:			
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES		DR:			
						SCALE	SHEET
						1:1	3/3
						REV.	A3