



5

	F
--	---


5

RoHS

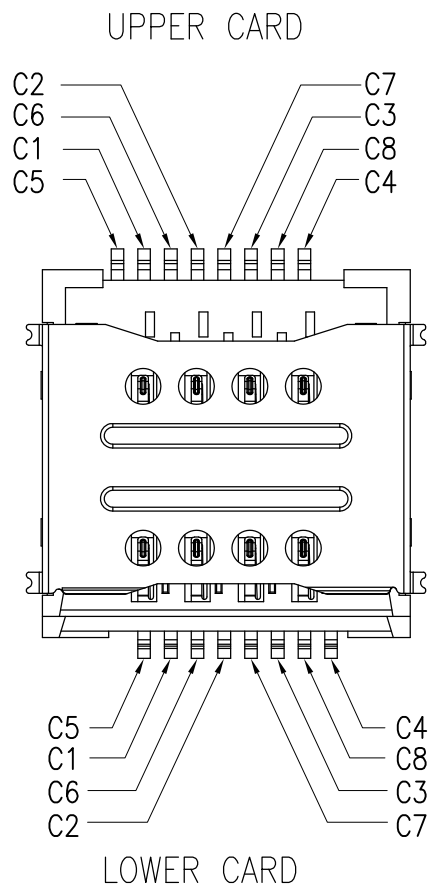


C1	C1:VCC
C2	C2:RST
C3	C3:CLK
C4	C4:RESERVED
C5	C5:GND
C6	C6:VPP
C7	C7:I/O
C8	C8:RESERVED

SIM CARD CIRCUIT

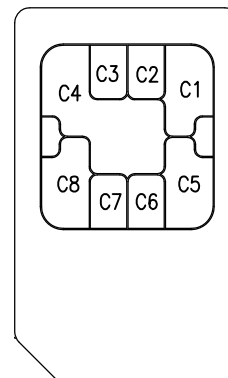

- NOTES:
- 1.MATERIAL:
- 1.1.Housing:HI-TEMP Plastic,UL94V-0,Black;
- 1.2.Terminal:C5210,
- 1.3 Shell:SUS201,
- 2.FINISH:
- 2.1 Terminal: Au Plated on the contact area,Matte tin plated on the solder tails underplated over nickel;
- 2.2 Shell: Au plated on the solder tails underplated over nickel;
3. Electrical Performance:
- 3.1 Current Rating: 1A
- 3.2 Voltage Rating: 50V RMS.
- 3.3 Contact Resistance:50mΩ Max
- 3.4 Dielectric Withstanding Voltage:500V AC for 1 minute
- 3.5 Insulation Resistance:1000 MΩ Min
4. Mechanical Performance:
- 4.1 Durability:3000 cycles;
- 4.2 Normal force: 20gf/PIN Min;

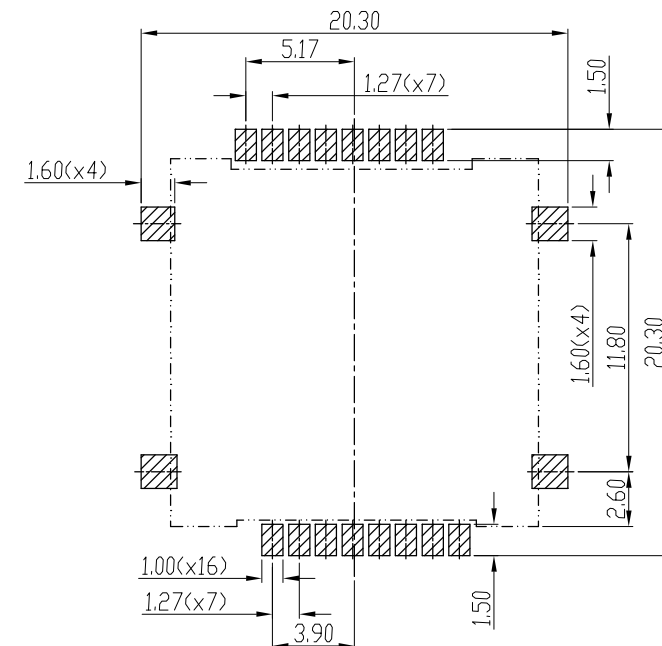


RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05

MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司			
		MM	DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2°	X° ± 2°	MAT'L	PART NUMBER:		TITLE:	
.X ± 0.38	.XX ± 0.012	SEE NOTES	XB-102012912		3.0H 双层 SIM CARD	
.XX ± 0.25	.XXX ± 0.008	FINISH	APPD:		DWG NO.:	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	CHKD:		C-102012912-00	
		QTY	DR:			
		SEE NOTES				
					SCALE	SHEET
					1:1	2/3
					REV.	A0

RoHS

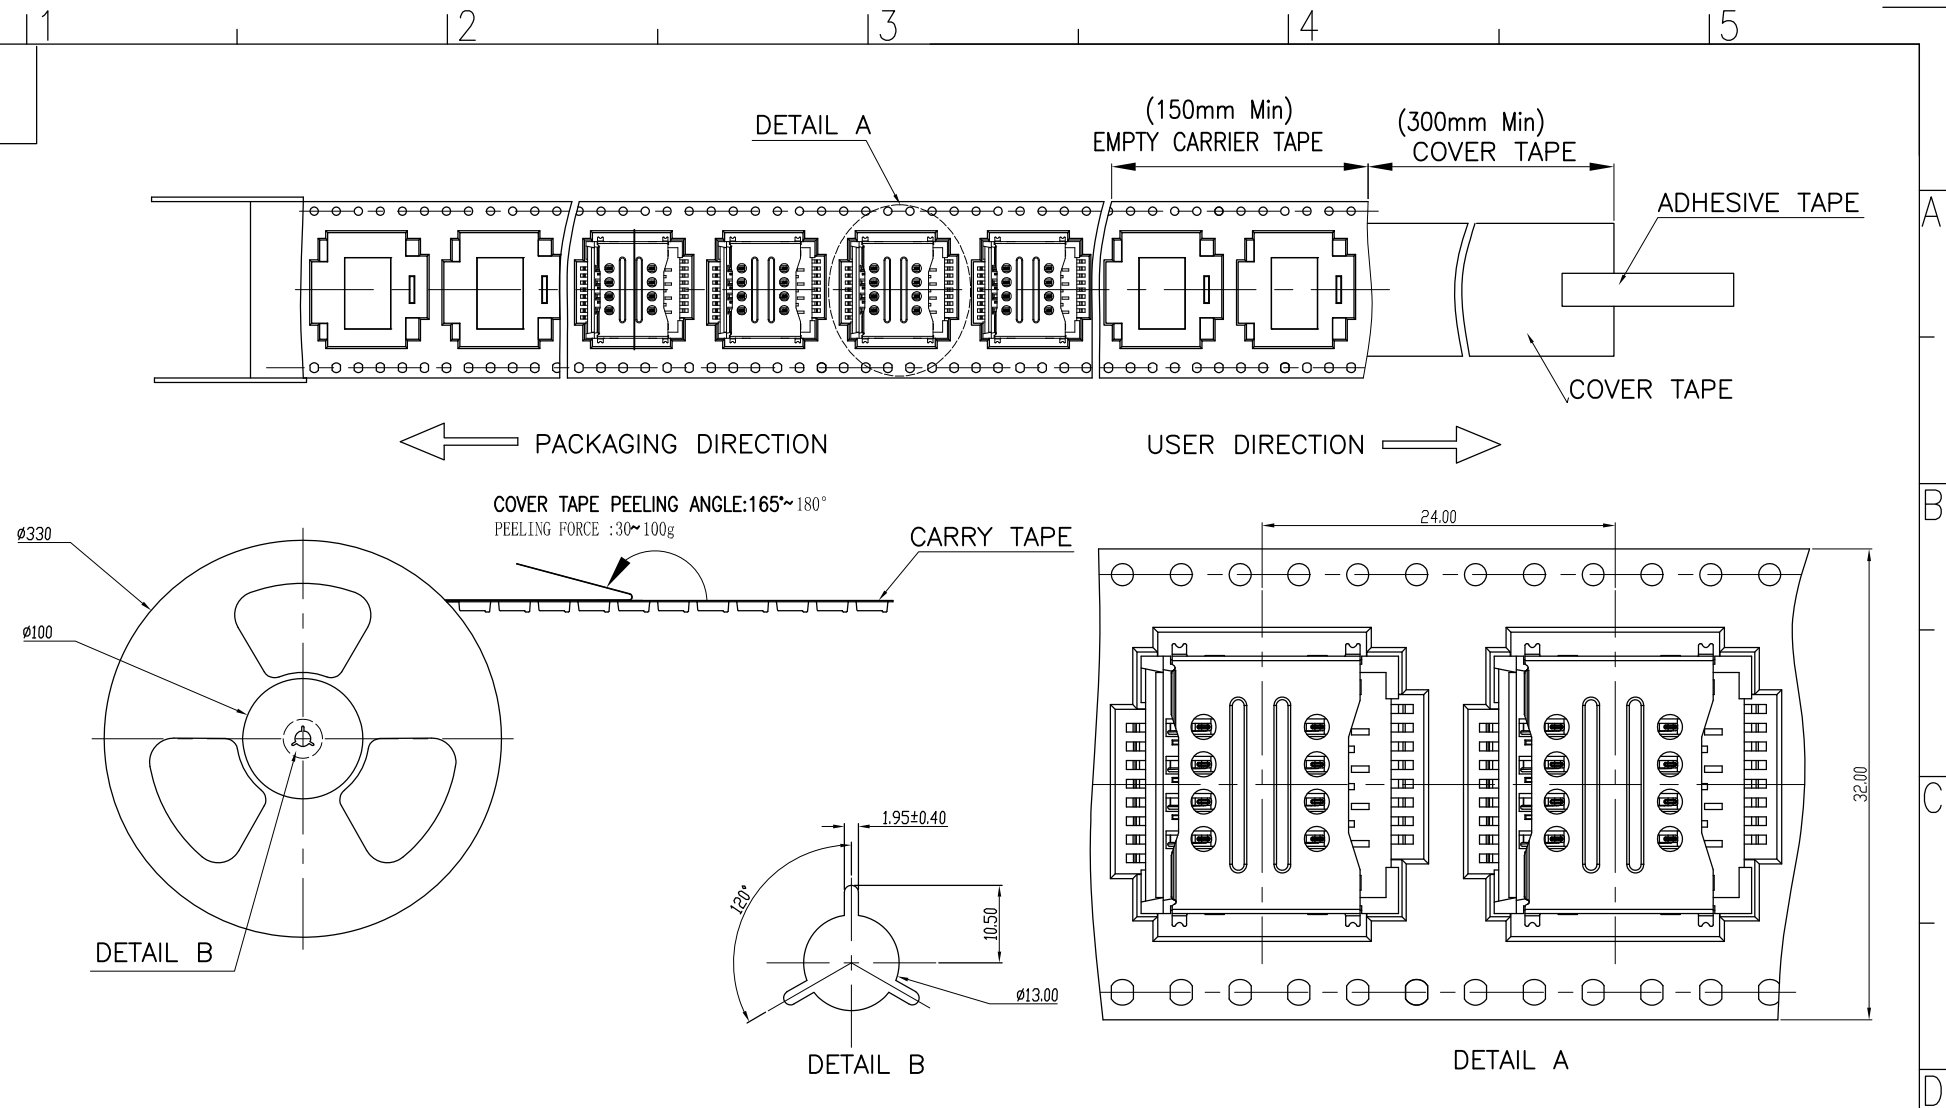

1	102012912	700	9	6300	345X345X352
ITEM	R/N.	QTY/REEL	REEL/CARTON	QTY/CARTON	CARTON SIZE

MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.										
		MM											
X° ± 2°	X° ± 2°	MAT'L	PART NUMBER: XB-102012912		TITLE: 3.0H 双层 SIM CARD								
.X ±0.38	.XX ±0.012	SEE NOTES											
.XX ±0.25	.XXX ±0.008	FINISH	APPD:		DWG NO.: C-102012912-00								
.XXX±0.10	.XXXX±0.004	SEE NOTES											
		QTY	CHKD:		 <table><tr><td>SCALE</td><td>SHEET</td><td>REV.</td></tr><tr><td>1:1</td><td>3/3</td><td>A0</td></tr></table>			SCALE	SHEET	REV.	1:1	3/3	A0
		SCALE	SHEET	REV.									
		1:1	3/3	A0									
		SEE NOTES	DR:										