
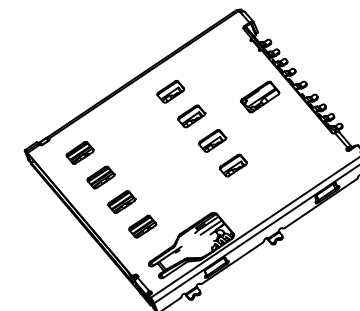



RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	12/28'17	SKY	WZX	HAIYONG

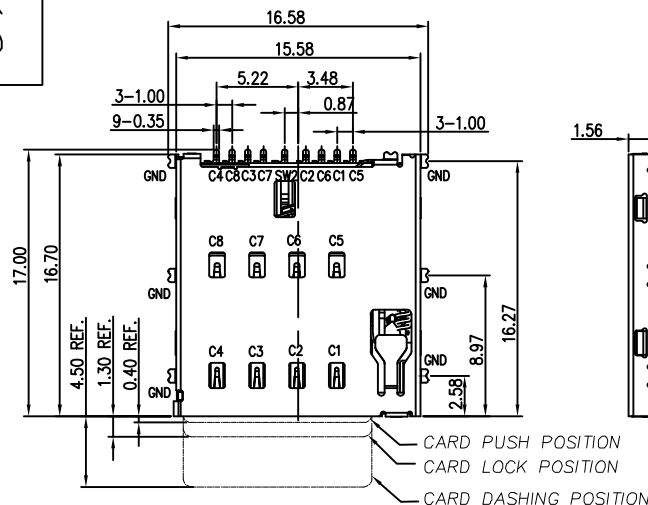

NOTES:

1. MATERIAL:

1.1 Housing: High Temperature Thermoplastic
UL94V-0; Color Black.

1.2 Terminal: Copper Alloy.

1.3 Shell: Stainless Steel.

2. SPECIALITY:

2.1 Rated current: 1.0A

2.2 Rated voltage: 50V

2.3 Contact Resistance: 100mΩ MAX

2.4 Insulation Resistance: 1000MΩ MIN 500V DC

2.5 Dielectric withstanding voltage: 500V AC.

2.6 Solder ability: 255±5℃, 5±0.5s.

2.7 Durability: 5000 Cycles Min.

2.8 Operating condition: Temperature -40℃~+85℃;

Humidity 80% R.H MAX

3. PLEASE CONTACT JITS SALES REPRESENTATIVE TO VERIFY PRODUCT
DETAILS & AVAILABILITY

DETECT SWITCH

CARD INSERTING POSITION	CLOSE	CLOSE SW1 SW2
NO CARD	OPEN	OPEN SW1 SW2

Card is not inserted;
Sw2 and Sw1/GND pin is open
Card is inserted;
Sw2 and Sw1/GND pin is close

RECOMMENDED P.C.B LAYOUT

TOP VIEW (TOLERANCE ±0.05)

PAD AREA

6	Housing	1PC	LCP UL94V-0	BLACK
5	LINK	1PC	SUS304	
4	SPRING	1PC	SWP-B	plating Ni: 30u"min
3	Slider	1PC	LCP UL94V-0	BLACK
2	COVER	1PC	SUS304	Slider plating Au: 1u", Ni: 30u"min
1	Terminal	1PC	C5210-EH, T=0.10	Contact Au: 1u", plating Au: 1u", Ni: 50u"min
NO	Description	Dosage	Material	Color/plating

MILLIMETERS	INCH
X° ± 2°	X° ± 2°
.X ± 0.30	.XX ± 0.012
.XX ± 0.20	.XXX ± 0.008
.XXX ± 0.10	.XXXX ± 0.004

UNITS	MM
MAT'L	
SEE NOTES	
FINISH	
SEE NOTES	
QTY	
SEE NOTES	


XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.PART NUMBER:
XB-102312072TITLE:
MICRO SIM 1.56 mm 8pin switch

APPD:

DWG NO.:
C-102312072

CHKD:

DR:



SCALE	SHEET	REV.
1:1	1/2	A0