


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
AO		NEW RELEASE	11/30'20	XL		MOON





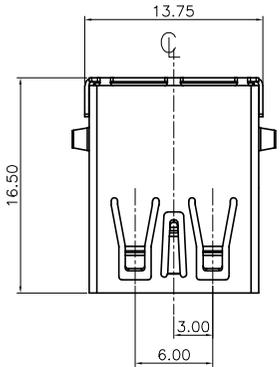


PART No.: 104012181-X
 USB SERIES
 PLATING: 01:G/F+TIN
 SHELL: A:SUS B:BRASS C:SPCC
 PAKING: 1: TRAY
 SERIAL NO.

- NOTES:
 1.ELECTRONIC:
 CONTACT CURRENT RATING:1.5A
 CONTACT RESISTANCE: 30mohm MAX
 INSULATION RESISTANCE: 1000 Mohm MIN
 WITHSTAND VOLTAGE:AC 500V,1min.
 2.MECHANICAL:
 MATING FORCE:3.57KG MAX
 UNMATED FORCE:1.02KG MIN
 3.ENVIRONMENT CHARACTERISTICS:
 OPERTING TEMPERATURE:-55°C TO +105°C
 4.标示”▲”符号的尺寸为重点检验尺寸。

5.MATERIAL LIST:


No.	PART NAME	QTY	MATERIAL	REMARK
3	SHELL	1	SPCC/BRASS	NI PLATED
2	CONTACT	9	COPPER ALLOY	AU /TIN PLATED
1	HOUSING	1	THERMOPLASTIC(PBT)	(UL 94V-0) BLUE

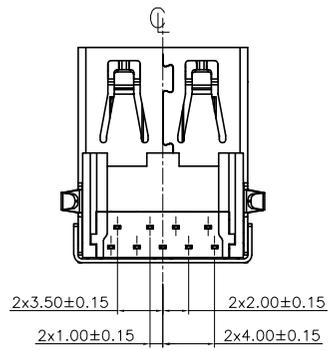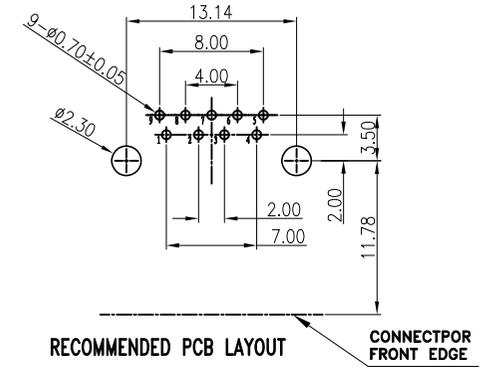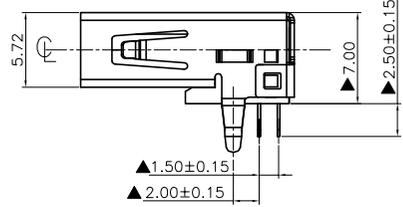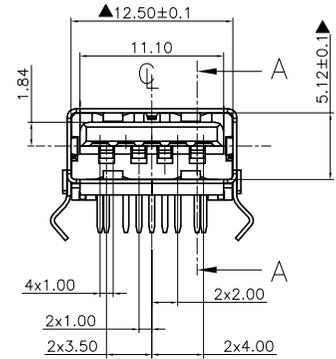


MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2'	X° ± 2'	MM	PART NUMBER: XB-104012181-B		TITLE: USB3.0正向板上CH4.13弯脚无卷边	
X ± 0.30	.XX ± 0.012	MAT'L	APPD:		DWG NO.: C-104012181-00	
.X ± 0.20	.XXX ± 0.008	SEE NOTES	CHKD:		SCALE SHEET REV. 1:1 1/2 AO	
.XXX ± 0.10	.XXXX ± 0.004	FINISH	DR:			
		SEE NOTES	QTY			
		SEE NOTES	DR:			

RoHS


- 1-1 将USB3.0正向板上CH4.13弯脚无卷边的成品整齐的装入真空盒底盒内。
 1-2 每盘真空盒上面必须盖一个盖子, 以免产品漏失。
 1-3 真空盒材质必须是PET环保材料。
 每盘装成品100PCS
 备注: 真空壳规格: 长300*宽230*高12.5CM

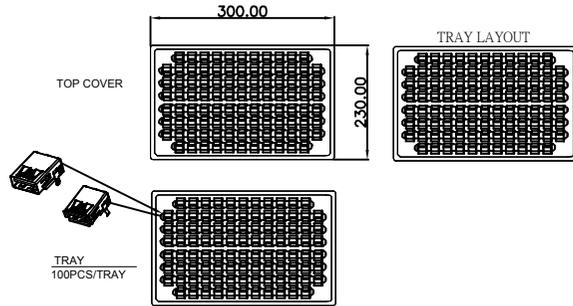


- 2-1 每箱分2扎装, 每扎共9盘, 用PE膜扎成一扎; 每扎上下垫一片纸板。
 每箱的数量小计: (900*10) + (900*10) = 1800CS

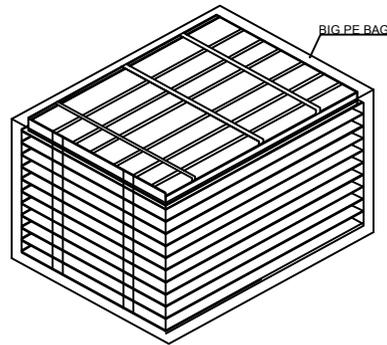


- 3-1 将2摞成品依次放入纸箱内. 备注:
 纸箱规格: 长32.5*宽23.5*高25.5CM K=A 无MARK

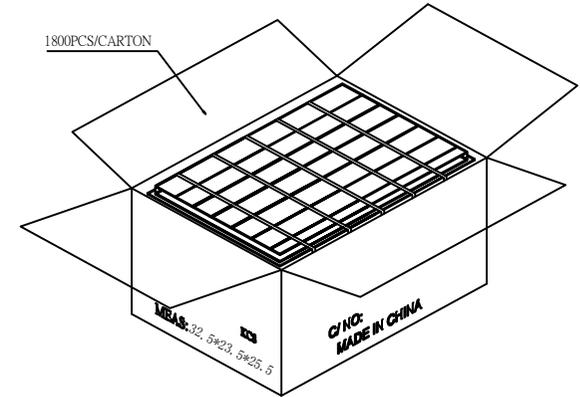

- 4-1 纸箱开口处以透明胶带贴合。
 4-2 若有未装满的零数箱, 必须以缓冲材塞满。

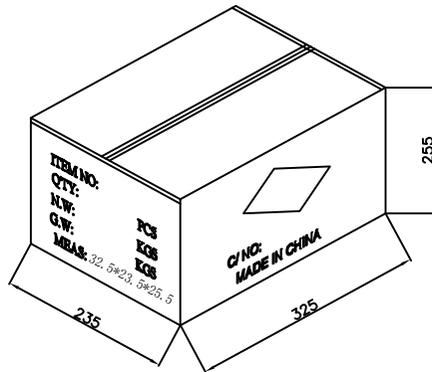

MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2'	X° ± 2'	MM	PART NUMBER: XB-104012181-B		TITLE: USB3.0正向板上CH4.13弯脚无卷边	
.X ± 0.30	.XX ± 0.012	MAT'L				
.XX ± 0.20	.XXX ± 0.008	SEE NOTES	APPD:		DWG NO.: C-104012181-00	
.XXX ± 0.10	.XXXX ± 0.004	FINISH	SEE NOTES		SCALE SHEET REV. 1:1 2/2 A0	
		QTY	DR:			
		SEE NOTES				