


15

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
AO		NEW RELEASE	07/12'20	HUANGTAO		YZZ

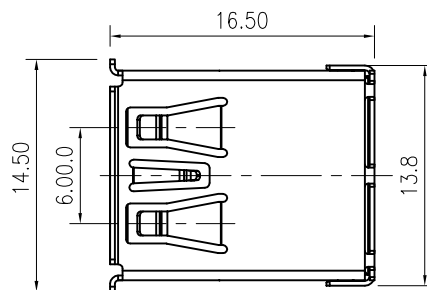

PART No.:

USB SERIES
PLATING: —
01:G/F+TIN

10401233X

- PAKING:
 - 1: TRAY
 - 2: REEL
- SERIAL NO.

NOTES:

1.ELECTRONIC:

CONTACT CURRENT RATING:1.5A

CONTACT RESISTANCE: 30mohm MAX

INSULATION RESISTANCE: 1000 Mohm MIN

WITHSTAND VOLTAGE:AC 500V,1min.

2.MECHANICAL:





MATING FORCE:3.57KG MAX

UNMATED FORCE:1.02KG MIN

3.ENVIRONMENT CHARACTERISTICS:


OPERATING TEMPERATURE: -55°C TO +105°C

4.标示“▲”符号的尺寸为重点检验尺寸。

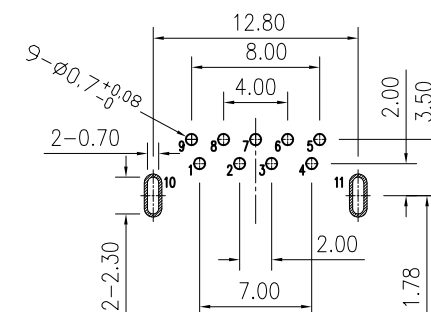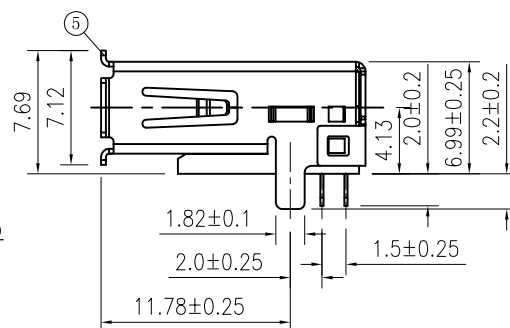
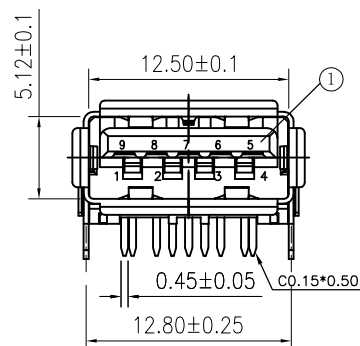


RECOMMENDED PCB LAYOUT

CONNECTPOR
FRONT EDGE



Detail A Scale 2:1

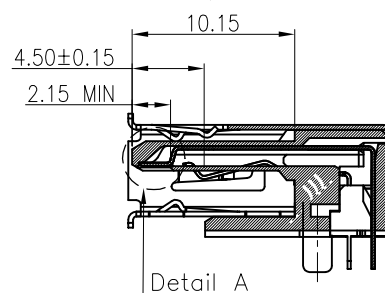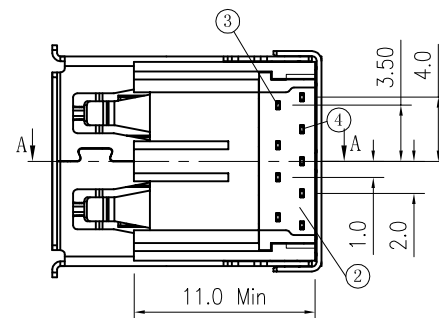


Detail A

5	SHELL	1	BRASS	NI PLATED
4	5PIN	5	COPPER ALLOY	AU/TIN PLATED
3	4PIN	4	PHOSPHOR BRONZE	AU/TIN PLATED
2	COVER	1	LCP BLUE	(UL 94V-0)
1	HOUSING	1	LCP BLUE	(UL 94V-0)
No.	PART NAME	QTY	MATERIAL	REMARK

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2'	X° ± 2'	MAT'L				
.X ± 0.38	.XX ± 0.015	SEE NOTES	PART NUMBER:	TITLE:		
.XX ± 0.25	.XXX ± 0.010	FINISH	XB-104012332	USB3.0 AF90° 正向板上CH4.13直脚有卷边		
.XXX± 0.15	.XXXX± 0.006	SEE NOTES	APPD:	DWG NO.:		
		QTY	CHKD:	C-104012332-00		
		SEE NOTES	DR:		SCALE	SHEET
					1:1	1/2
						REV.
						AO

RoHS

User Direction of Unreeling

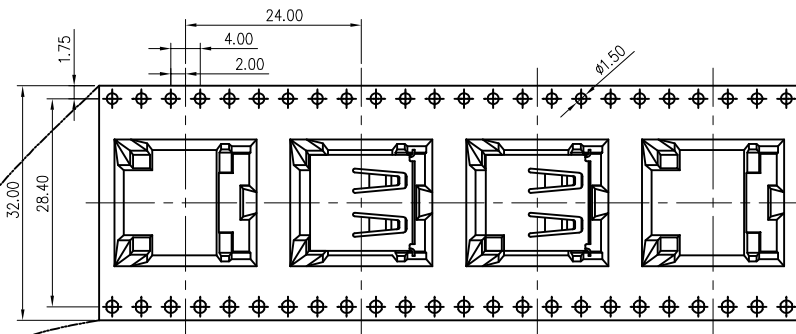

COVER TAPE PEELING ANGLE: 165°~180°

PEELING FORCE: 20~130g

CARRIER TAPE

User Direction of Unreeling


DETAIL B

DETAIL B

NOTES


1. NUMBER OF CONNECTORS: 270 PCS/REEL


2. LEAD TAPE LENGTH

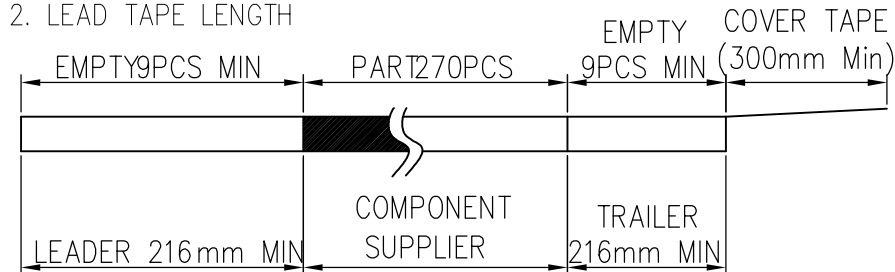

3. QUANTITY: 1350 PCS/CARTON

CARTON
340*340*200 K=K

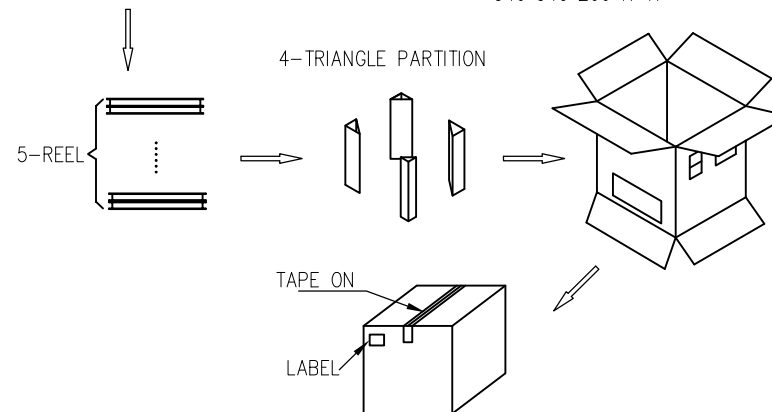

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
X° ± 2'	X° ± 2'	MAT'L					
.X ± 0.38	.XX ± 0.015	SEE NOTES					
.XX ± 0.25	.XXX ± 0.010	FINISH					
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES					
			PART NUMBER:	TITLE:			
			XB-104012332		USB3.0 AF90° 正向板上CH4.13直脚有卷边		
			APPD:		DWG NO.:		
			CHKD:		C-104012332-00		
							
QTY			DR:		SCALE	SHEET	REV.
SEE NOTES					1:1	2/2	A0