

RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
X0		NEW RELEASE	05/18'18	TEDDY	TEDDY	HAIYONG
X1	ECN1809020	Remove the convex hull according to the object	09/17'18	TEDDY	TEDDY	HAIYONG

A

B

C

D

E

A

B

C


D

E


DATE CODE AREA

SYWWDD


ø6.0 AVAILABLE VACUUM PICK AREA



B
2:1



A
2:1



NOTES:

1. MATERIAL:

1.1 Housing: High Temperature Thermoplastic
UL94V-0; Color: BLUE.

1.2 Terminal: Copper Alloy.

1.3 Shell: Stainless Steel.

2. SPECIALITY:

2.1 Rated current: 1A

2.2 Rated voltage: 30V

2.3 Contact Resistance: 30mΩ MAX

2.4 Insulation Resistance: 100MΩ MIN 500V DC

2.5 Dielectric withstanding voltage: 100V AC.

2.6 Solder ability: 255±5°C, 5±0.5s.




2.7 Durability: 5000 Cycles Min.

2.8 INITIAL: 10N-22.06N

2.9 AFTER: 8N-22.06N

3.0 Operating condition: Temperature -40°C~+85°C;
Humidity 80% R.H MAX

3. PLEASE CONTACT JITS SALES REPRESENTATIVE TO
VERIFY PRODUCT DETAILS & AVAILABILITY

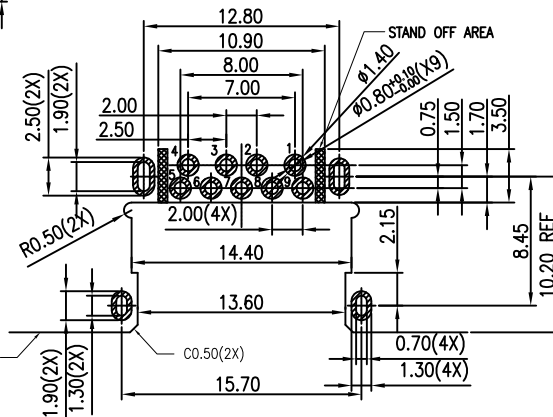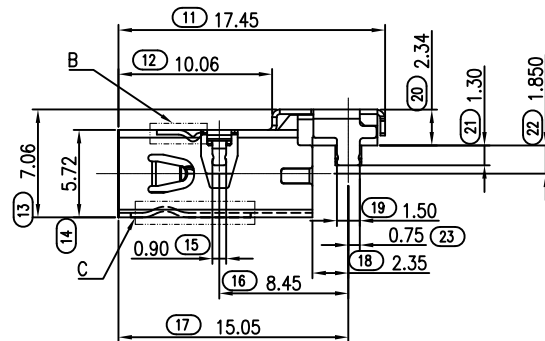

RECOMMENDED PCB LAYOUT (TOP VIEW)

GENERAL TOLERANCE: ±0.05

PAD AREA

9	STDA_SSTX-	USB3.0
8	STDA_SSTX-	
7	GND	
6	STDA_SSRX-	
5	STDA_SSRX-	USB2.0
4	GND	
3	D+	
2	D-	
1	VBUS	
PIN NO	SIGNAL NAME	REMARK

3	Housing	1PC	High Temperature Thermoplastic	UL94V-0; Color blue(PANTONE300C)
2	Shell	1PC	Stainless Steel	Slider plating Ni: 30u"min
1	Terminal	1PC	Copper Alloy.	Contact Au: 1u"min plating ; slider MATTE TIN 100~160u", Ni: 50u"min
NO	Description	Dosage	Material	Color/plating

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司			
X° ± 2°	X° ± 2°	MAT'L		DONG GUAN XI BANG ELECTRONICS CO., LTD.			
.X ± 0.30	.XX ± 0.012	SEE NOTES		PART NUMBER:		TITLE:	
.XX ± 0.20	.XXX ± 0.008	FINISH		XB-104010092		USB 3.0 SINKING 1.85 DIP	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES		APPD:		DWG NO.:	
		QTY		CHKD:		C-104010092-00	
		SEE NOTES		DR:			
						SCALE	SHEET
						1:1	1/2
						REV.	X0

RoHS

A

B

C

D

E


A

B

C


D

E

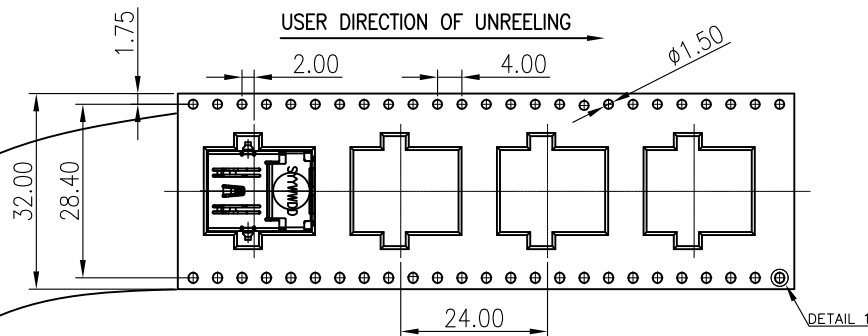


NOTES



1. NUMBER OF CONNECTORS: 370PCS/REEL
2. LEAD TAPE LENGTH

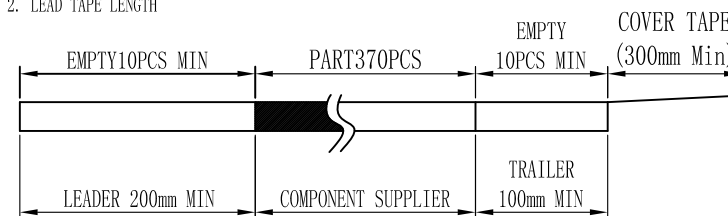


3. QUANTITY: 3330PCS/CARTON

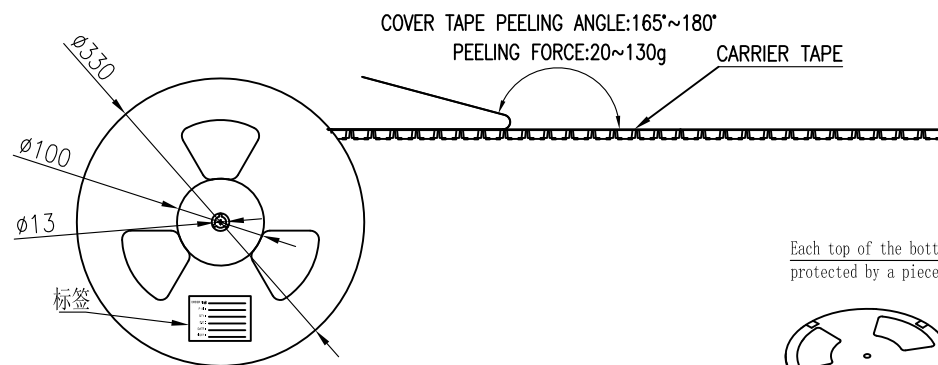

Each top of the bottom of the carton is protected by a piece of pearl cotton

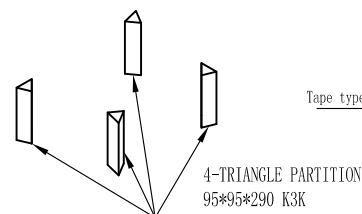


Tape type sealing box





RoHS

LABEL



CARTON
350*350*340 K=K

9 rolls per carton

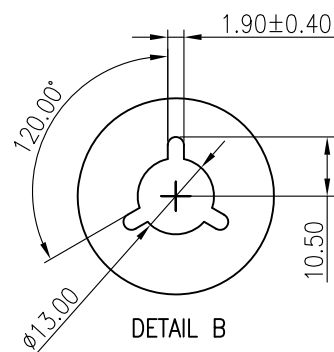

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
X° ± 2°	X° ± 2°	MAT'L			
.X ± 0.30	.XX ± 0.012	SEE NOTES			
.XX ± 0.20	.XXX ± 0.008	FINISH			
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES			
		QTY			
		SEE NOTES			
PART NUMBER: XB-104010092			TITLE: USB 3.0 SINKING1.85 DIP		
APPD:			DWG NO.: C-104010092-00		
CHKD:					
DR:					
			SCALE 1:1	SHEET 2/2	REV. X0