
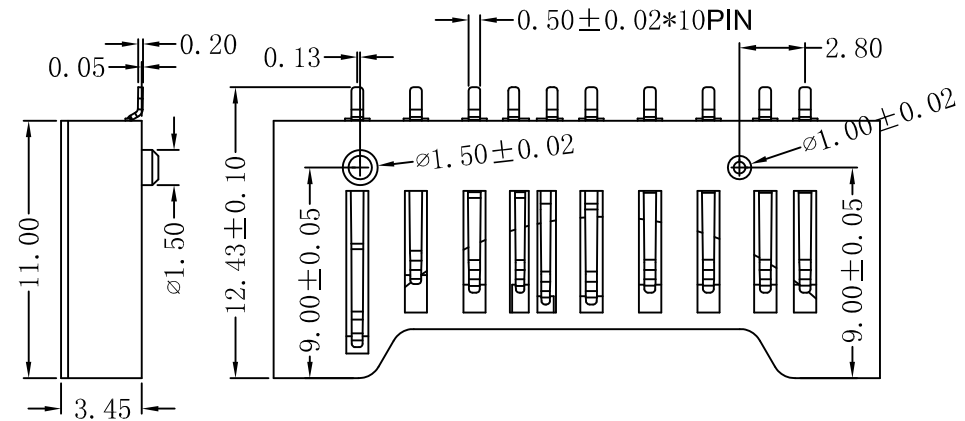


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	20171020	YANG		HAIYONG

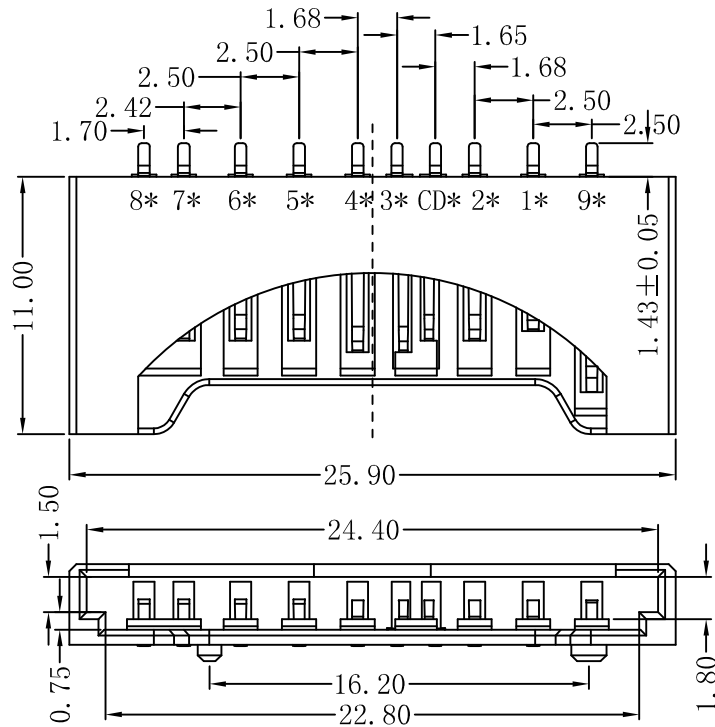

NOTES:
Current Rating: 0.5A AC,DC
Temperature Range: -20°C~+60°C
Contact Resistance: 40mΩ max
Insulation Resistance: 1000MΩ min
Withstanding Voltage: 500V
AC/minute
Material: Insulation:HI-Temp plastic UL 94V-0 Rated.
Contact:Phsoprpr Bronze.

PIN Assignment			
PIN*	Name	Type	Card Detelct/bete line[Bit3]
1	CD/DAT3	I/O/PP	Comard/response
2	CMD	PP	Supply voltage
3	V551	S	Supply voltage ground
4	VDD	S	Supply voltage
5	CLK	I	Clock
6	V552	S	Supply voltage ground
7	DAT0	I/O/PP	Date line [Bit0]
8	DAT1	I/O/PP	Date line [Bit1]
9	DAT2	I/O/PP	Date line [Bit2]

MILLIMETERS		INCH		UNITS		 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
X° ± 2°		X° ±		MM							
.X ± 0.30		.XX ±		MAT'L		PART NUMBER: XB-402013402-A					
.XX ± 0.20		.XXX ±		SEE NOTES							
.XXX± 0.10		.XXXX±		FINISH		TITLE: SD 短体全塑简易卡座					
				SEE NOTES							
				QTY		DWG NO.: C-402013402-A					
				SEE NOTES							
				CHKD:							
				DR:							
						SCALE		SHEET		REV.	
						1:1		1/2		A0	