


RoHS

CAP 示意图


REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
AO		NEW RELEASE	04/20'21	TXF		MOON

NOTE:

- 1.Contact Resistance:40mOHM Max.;
- 2.Dielectric Withstanding Voltage:100V AC For 1 Minute;
- 3.Insulation Resistance:100M OHM Min.;
- 4.Mating And Unmating Force:
Mating Force: 5~20N
Unmating Force: 8~20N;
6~20N AFTER TEST;
- 5.Durability:10000 Cycles;



WITH COVER

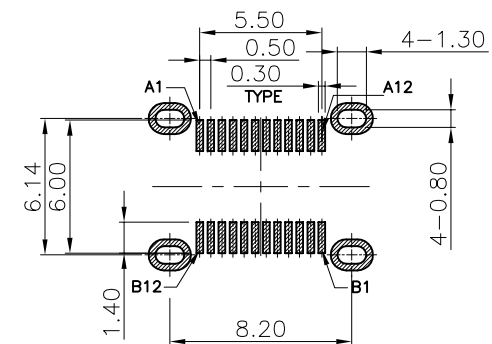

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)

TOLERANCE FOR PCB LAYOUT IS ± 0.05

KEEP OUT AREA








USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND


Item	Title	Material	Dispose	Q'TY
1	Shell	SUS304	Ni:30u" Min.	1PCS
2	GND Plate	SUS301		2PCS
3	Mid Plate	SUS301		1PCS
4	Contact	C7025	Mating Area: Au 1u" Solder Tails: Matt Tin	2PCS
5	InsertMolding	LCP E6808	UL 94V-0 Black	1PCS
6	COVER	LCP E6808	UL 94V-0 Black	1PCS

MILLIMETERS	INCH	UNITS	MM
X° ± 2°	X° ± 2°	MAT'L	
.X ± 0.30	.XX ± 0.012	SEE NOTES	
.XX ± 0.20	.XXX ± 0.008	FINISH	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	
		QTY	
		SEE NOTES	

XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
PART NUMBER: XB-104014292		TITLE: TYPE C 24PIN 180度 SMT无柱 H=13.0mm	
APPD:		DWG NO.: C-104014292-00	
CHKD:		SCALE	
DR:		SHEET	
		REV.	
		1:1	
		1/2	
		AO	

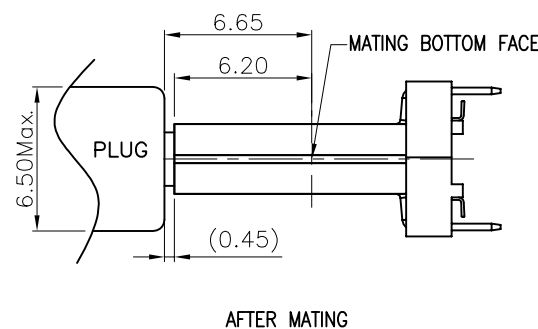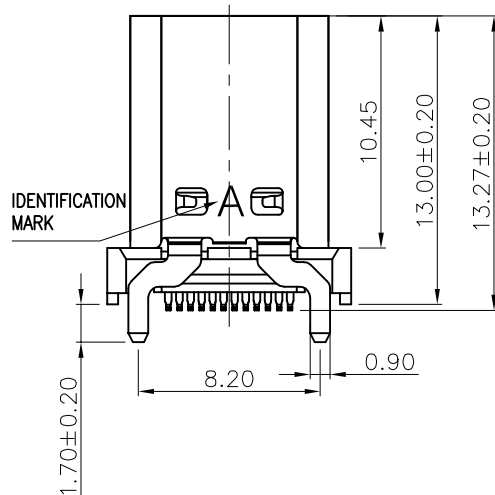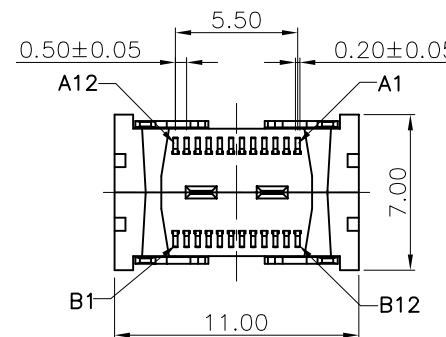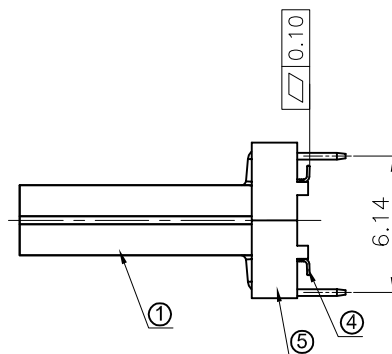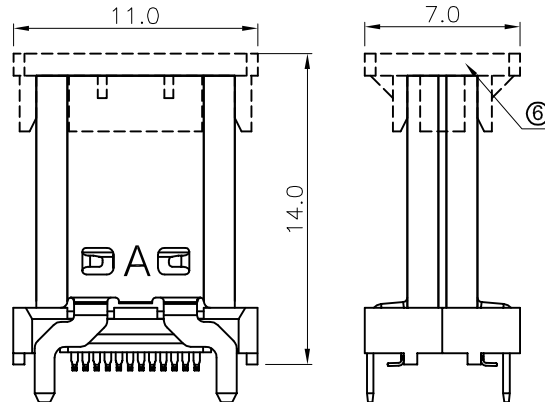


RoHS


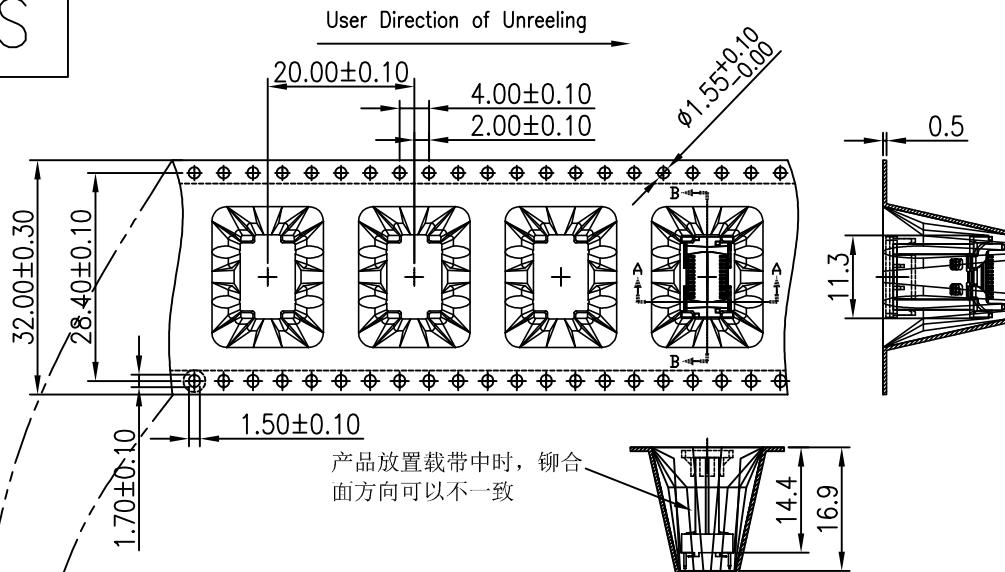


NOTES

1. NUMBER OF CONNECTORS: 250PCS/REEL
2. LEAD TAPE LENGTH

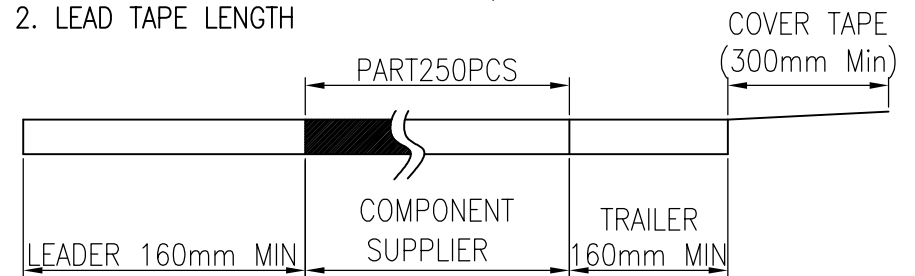

3. QUANTITY: 2000PCS/CARTON

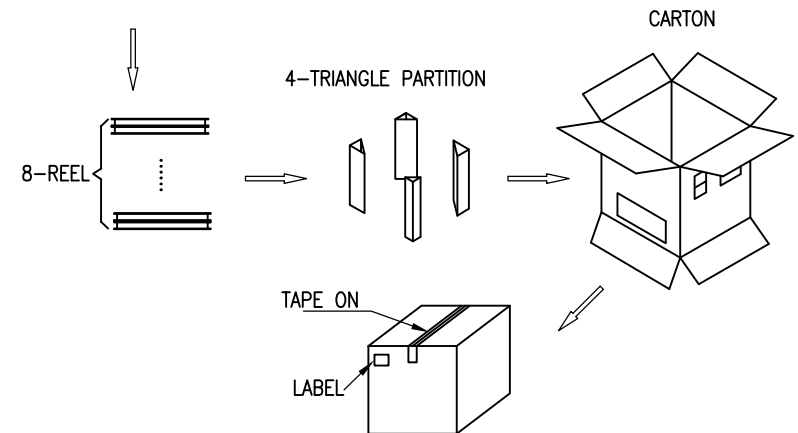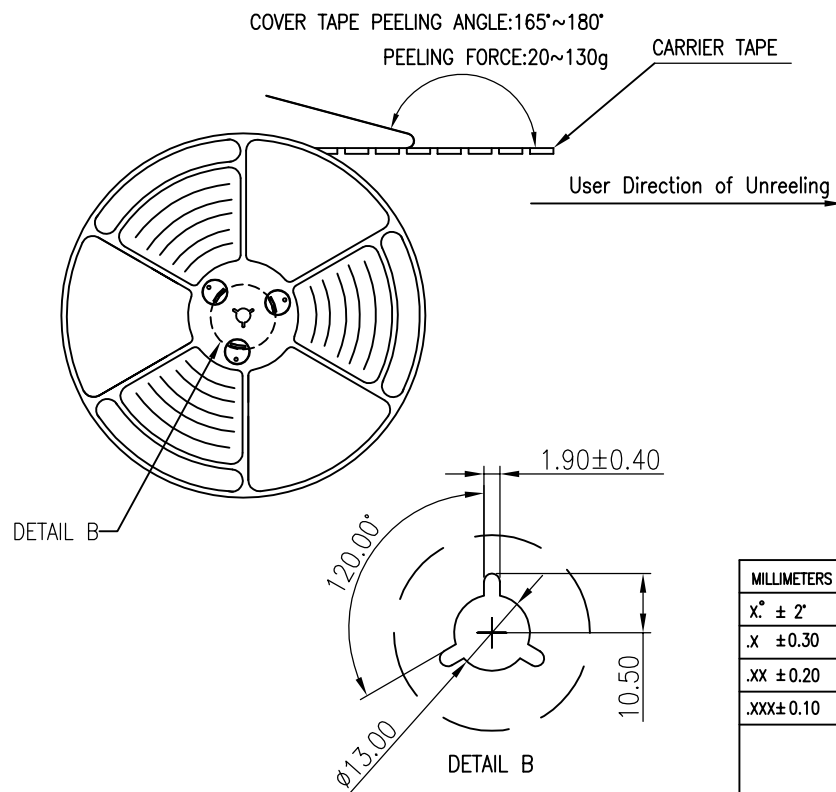

MILLIMETERS	INCH	UNITS	MM	XGB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2'	X° ± 2'	MAT'L	SEE NOTES	PART NUMBER: XB-104014292		TITLE: TYPE C 24PIN 180度 SMT无柱 H=13.0mm	
.X ± 0.30	.XX ± 0.012	FINISH	SEE NOTES	APPD:		DWG NO.: C-104014292-00	
.XX ± 0.20	.XXX ± 0.008	QTY	SEE NOTES	CHKD:		SCALE	
.XXX ± 0.10	.XXXX ± 0.004			DR:		SHEET	
						REV.	
						1:1	
						2/2	
						A0	