

RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	02/12'21	TXF	/	MOON

NOTES:

- 1.MATERIAL :SEE TABLE
- 2.COPLANARITY : 0.10 Max.
- 3.ELECTRICAL CHARACTERISTICS
LOW LEVEL CONTACT RESISTANCE: 40mΩ Max
INSULATION RESISTANCE:100MΩ MIN
DIELECTRIC WITHSTANDING VOLTAGE:100 VAC:
CONTACT CURRENT RATING:5A Max
- 4.MECHANICAL CHARACTERISTICS
INSERTION FORCE: 5~20N
EXTRACTION FORCE: 8~20N
AFTER DURABILITY EXTRACTION FORCE: 6~20N
- 5.DURABILITY: 10000 CYCLES
- 6.PACKAGING TYPE: CARRIER TAPE.
- 7.SALT SPRAY : 24 HOURS

SECTION A-A

PART No.:

104015892



USB SERIES
PLATING: 01: Au1u"+Matte Tin
PAKING: 2: REEL
SERIAL NO.

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2°	X° ± 2°	MAT'L		PART NUMBER:		TITLE:	
.X ± 0.30	.XX ± 0.012	SEE NOTES		XB-104015892-A		TYPE C 24PIN 双排SMT 垫高3.40MM	
.XX ± 0.20	.XXX ± 0.008	FINISH		APPD:		DWG NO.:	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES		CHKD:		C-104015892-00	
			QTY	DR:			
			SEE NOTES				

RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	02/12'21	TXF	/	MOON


Pin No	Signal Name	Mating Sequence	Pin No	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2	TX1+	Second	B11	RX1+	Second
A3	TX1-	Second	B10	RX1-	Second
A4	VBUS	First	B9	VBUS	First
A5	CC1	Second	B8	SBU2	Second
A6	D+	Second	B7	D-	Second
A7	D-	Second	B6	D+	Second
A8	SBU1	Second	B5	CC2	Second
A9	VBUS	First	B4	VBUS	First
A10	RX2-	Second	B3	TX2-	Second
A11	RX2+	Second	B2	TX2+	Second
A12	GND	First	B1	GND	First
SHELL		GND	SHELL		GND

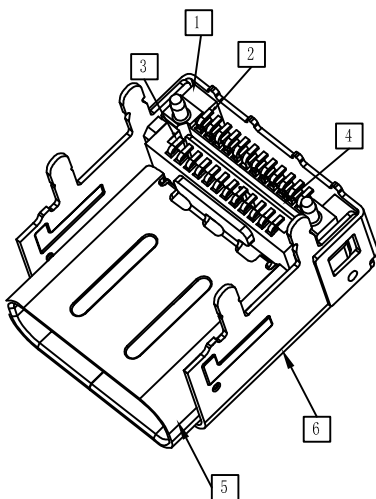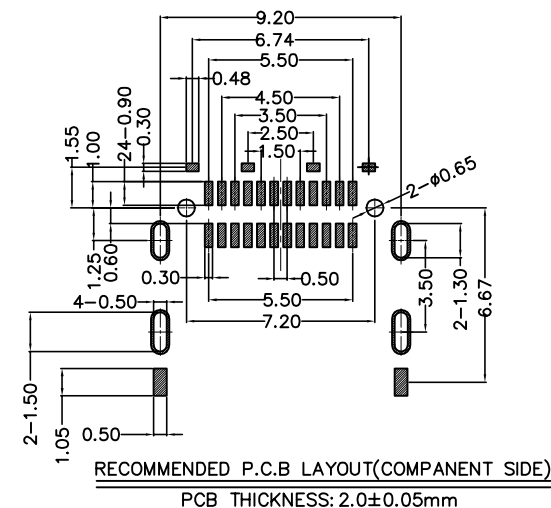

6	OUTER-SHELL	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
5	INNER-SHELL	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
4	TOP TERMINAL	1	COPPER ALLOY	MATING AREA: AU 30U" SOLDER TAIL: MATTE TIN 50 MIN, 50U" NICKEL OVERALL.
3	BOTTOM TERMINAL	1	COPPER ALLOY	MATING AREA: AU 15U" SOLDER TAIL: MATTE TIN 50 MIN, 50U" NICKEL OVERALL.
2	MID PLATE	1	STAINLESS STEEL	SOLDER NICKEL: 50U" MIN
1	MAIN HOUSING	1	HIGH TEMPERATURE	BLACK
ITEM	DESCRIPTION	Q'TY	MATERIAL	FINISH
BILL OF MATERIAL				


MILLIMETERS	INCH	UNITS	东莞市溪榜电子有限公司			
X° ± 2°	X° ± 2°	MM	DONG GUAN XI BANG ELECTRONICS CO., LTD.			
.X ± 0.30	.XX ± 0.012	MAT'L				
.XX ± 0.20	.XXX ± 0.008	SEE NOTES				
.XXX ± 0.10	.XXXX ± 0.004	FINISH				
		SEE NOTES				
		QTY				
		SEE NOTES				
			PART NUMBER:		TITLE:	
			XB-104015892-A		TYPE C 24PIN 双排SMT 垫高3.40MM	
			APPD:		DWG NO.:	
			CHKD:		C-104015892-00	
			DR:			
					SCALE	SHEET
					1:1	2/3
					REV.	A0

RoHS


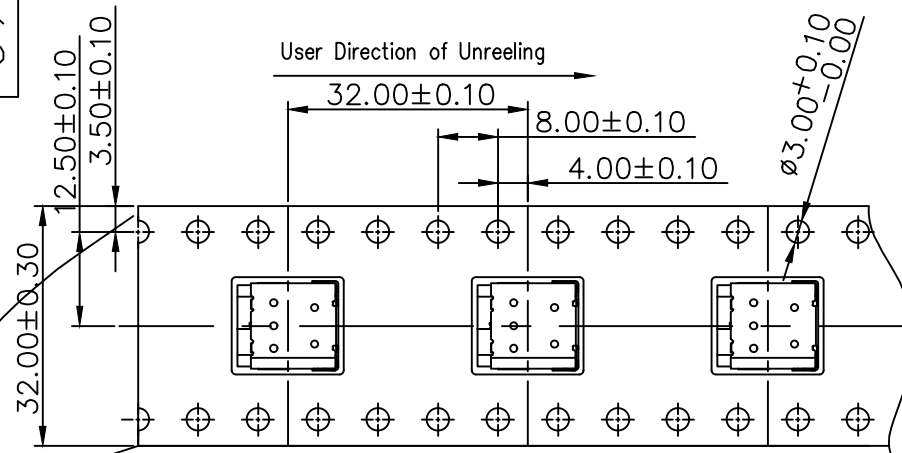


NOTES

1. NUMBER OF CONNECTORS:500PCS/REEL
2. LEAD TAPE LENGTH

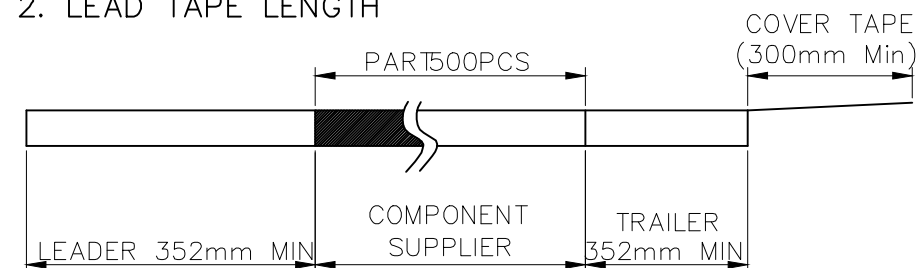

3.QUANTITY5000PCS/CARTON

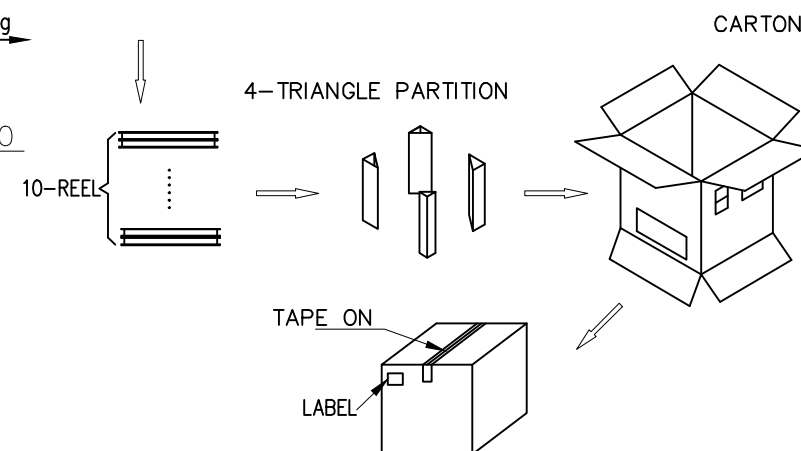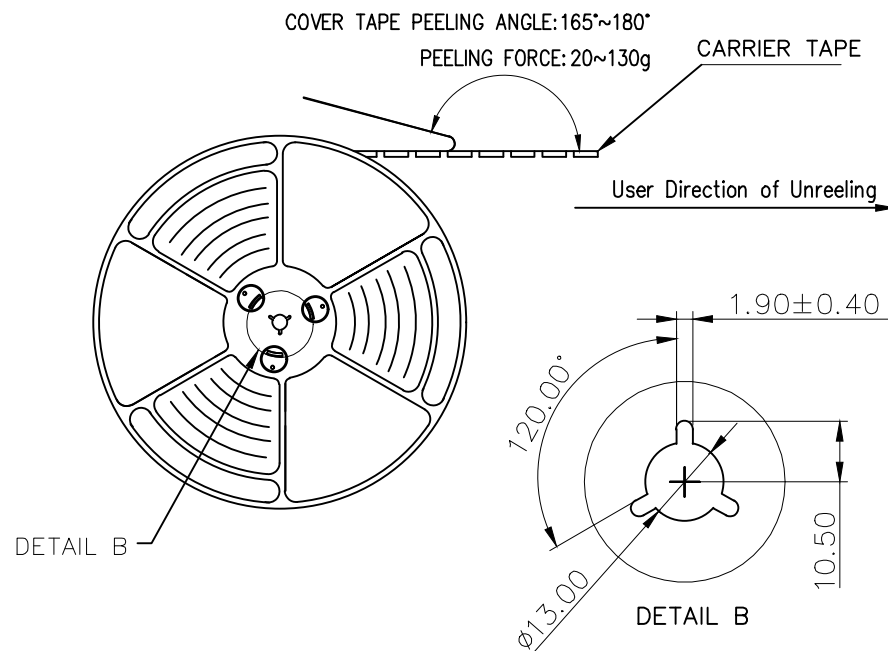

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X. [°] ± 2°	X. [°] ± 2°	MAT'L				
.X ± 0.38	.XX ± 0.015	SEE NOTES				
.XX ± 0.25	.XXX ± 0.010	FINISH				
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES	PART NUMBER: XB-104015892-A	TITLE: TYPE C 24PIN 双排SMT 垫高3.40MM		
			APPD:	DWG NO.: C-104015892-00		
		QTY	CHKD:			
		SEE NOTES	DR:			
				SCALE 1:1	SHEET 3/3	REV. AO