


15

D

RoHS

User Direction of Unreeling

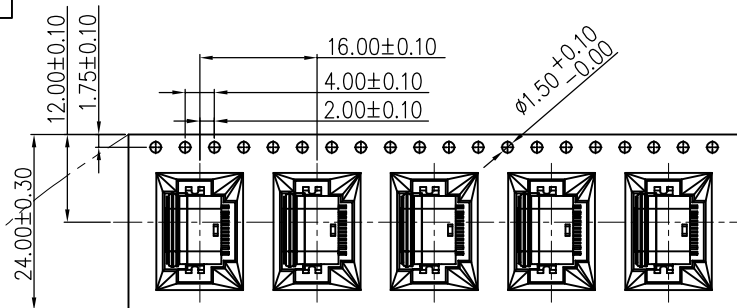


COVER TAPE PEELING ANGLE: $165^{\circ} \sim 180^{\circ}$
PEELING FORCE: 20~130g

CARRIER TAPE


User Direction of Unreeling

DETAIL B




NOTES

1. NUMBER OF CONNECTORS: 800PCS/REEL
2. LEAD TAPE LENGTH

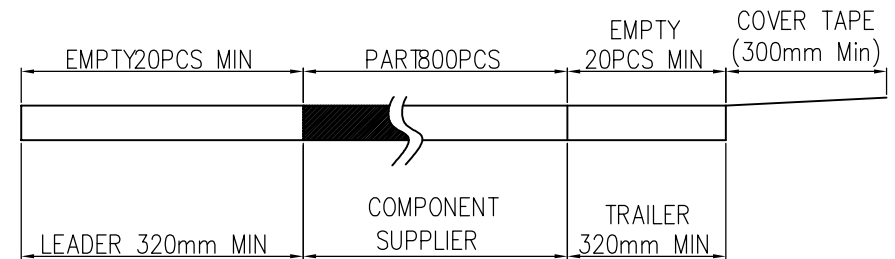


3. QUANTITY: 8000PCS/CARTON

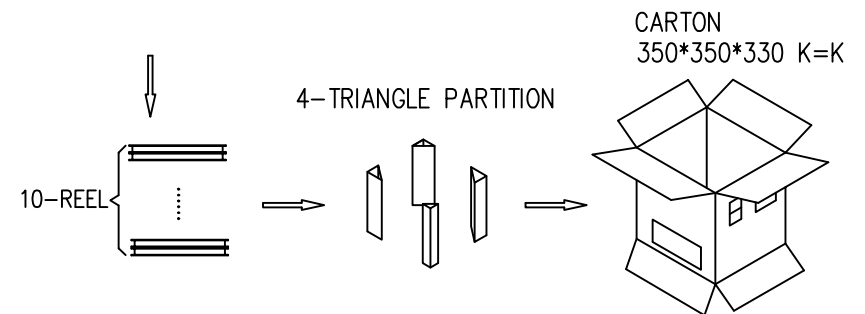


TAPE ON

LABEL



MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
$X^{\circ} \pm 2^{\circ}$	$X^{\circ} \pm 2^{\circ}$	MAT'L		PART NUMBER:	TITLE:
$.X \pm 0.38$	$.XX \pm 0.015$	SEE NOTES		XB-104313712	TYPE C 16PIN 沉板H=1.4 (防水型)
$.XX \pm 0.25$	$.XXX \pm 0.010$	FINISH		APPD:	DWG NO:
$.XXX \pm 0.15$	$.XXXX \pm 0.006$	SEE NOTES		CHKD:	C-104313712-00
		QTY		DR:	
		SEE NOTES			



SCALE	SHEET	REV.
1:1	2/2	A0