
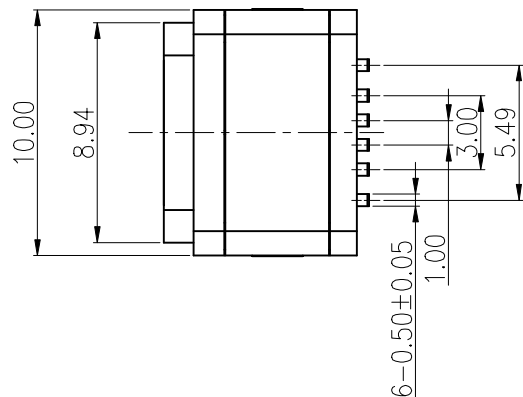







RoHS



REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
X0		NEW RELEASE	01/20'21	BX		MOON

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - RATING: 3A;
 - CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
 - DIELECTRIC WITHSTANDING: 100V AC MIN.;
 - INSULATION RESISTANCE: 100MΩ MIN.;
- DURABILITY: 10,000 CYCLES MIN.;
- INSERTION FORCE: 5-20N;
- EXTRACTION FORCE: 6-20N;
- WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.
- PLUG INTERFACE DIMENSIONS CONFORM TO USB2.0 SPEC.
- PACKAGING: TAPE & REEL.

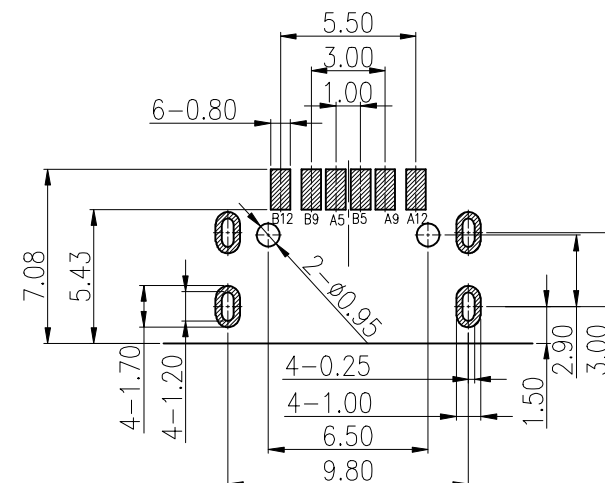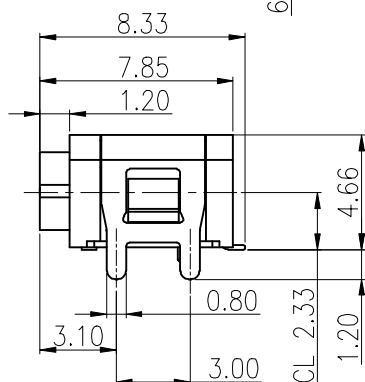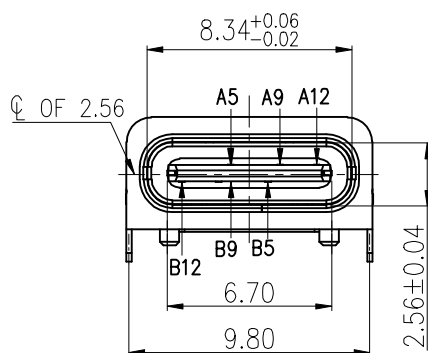

建议胶圈尺寸

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC2
PIN	SIGNAL NAME	PIN	SIGNAL NAME


PART No.:

USB SERIES
PLATING:
31: Au1u" + G/F

104313762


PAKING:
2: REEL
SERIAL NO.

3	Shell	1	SUS304R-1/2H Ni Plating T=0.25mm	
2	Contact	6	Phosphor bronze C5191R-EH Au/Ni Plating T=0.20mm	
1	Housing	1	PA10T (G.F30%) BLACK	
ITEM	PART NAME	Q'TY	FINISH	NOTE

MILLIMETERS		INCH		UNITS		东莞市溪榜电子有限公司							
X' ± Z'		X' ± Z'		MM		DONG GUAN XI BANG ELECTRONICS CO., LTD.							
.X ± 0.30		.XX ± 0.012		MAT'L									
.XX ± 0.20		.XXX ± 0.008		SEE NOTES		PART NUMBER:		TITLE:					
.XXX ± 0.10		.XXXX ± 0.004		FINISH		XB-104313762		TYPE-C 6PIN板上4.0带挂 四脚插板 防水插座					
				SEE NOTES		APPD:		DWG NO.:					
				QTY		CHKD:		C-104313762-00					
				SEE NOTES		DR:							
						SCALE		SHEET		REV.			
								1:1		1/2		A0	


RoHS

User Direction of Unreeling

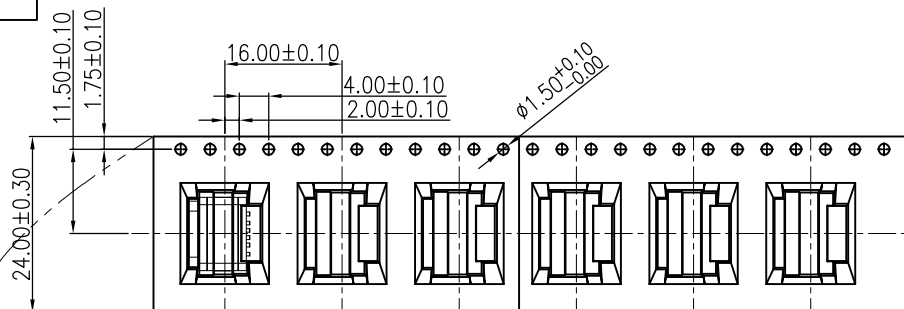

NOTES

1. NUMBER OF CONNECTORS: 700PCS/REEL
2. LEAD TAPE LENGTH

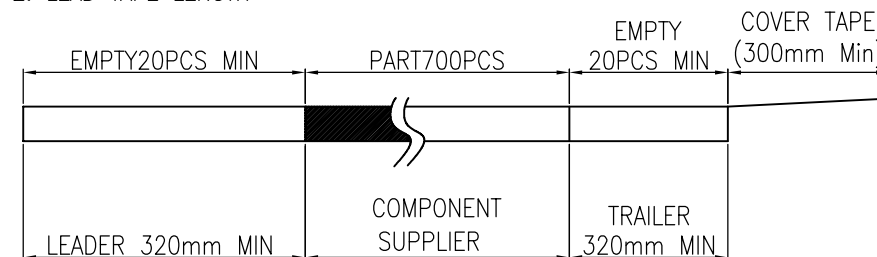

3. QUANTITY: 7000PCS/CARTON




COVER TAPE PEELING ANGLE: $165^\circ \sim 180^\circ$

PEELING FORCE: 20~130g

CARRIER TAPE

User Direction of Unreeling

DETAIL B

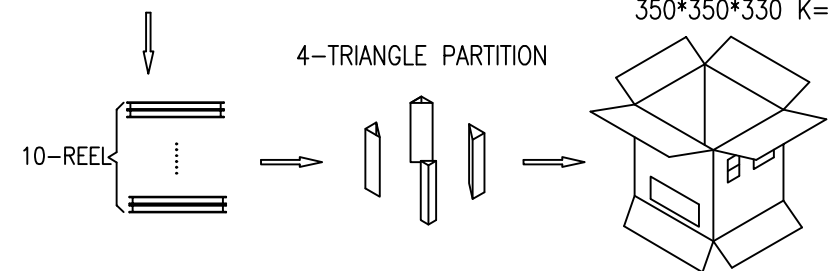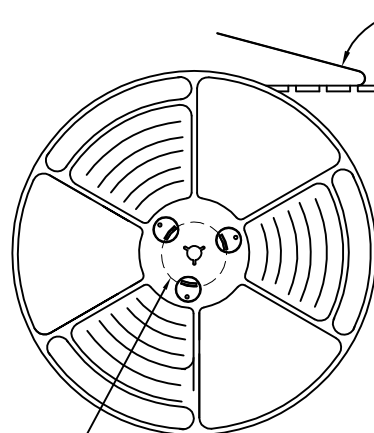

TAPE ON

LABEL



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NUMBER:
XB-104313762


TITLE:
TYPE-C 6PIN板上H4.6带柱 四脚插板
防水母座

APPD:

DWG NO.:
C-104313762-00

CHKD:

DR:



SCALE	SHEET	REV.
1:1	2/2	A0