

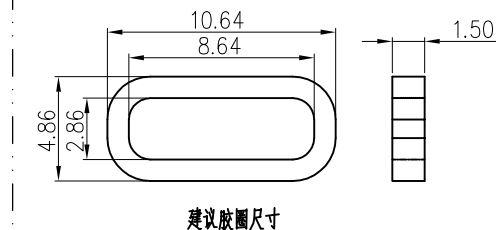






RoHS

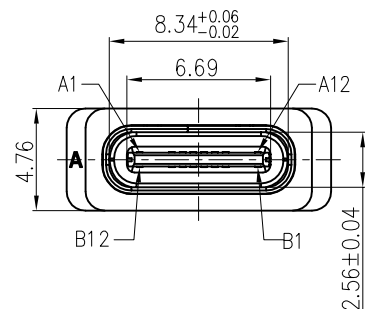



NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:10,000 CYCLES
9. WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX8.

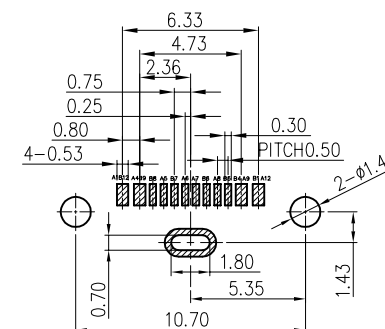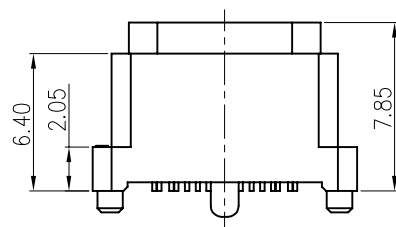

RECOMMENDED P. C. B LAYOUT
TOP VIEW (TOLRANCE:±0.05)

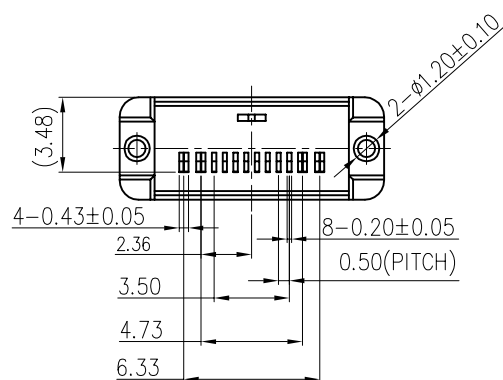

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

6	防水圈	硅胶	BLACK	1PCS
5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
2	SHELL HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
MILLIMETERS		INCH	UNITS	MM
X° ± 2°		X° ± 2°	MAT'L	
.X ± 0.30		.XX ± 0.012	SEE NOTES	
.XX ± 0.20		.XXX ± 0.008	FINISH	
.XXX ± 0.10		.XXXX ± 0.004	SEE NOTES	
		QTY	CHKD:	
		SEE NOTES	DR:	
东 莞 市 溪 榜 电 子 有 限 公 司			DONG GUAN XI BANG ELECTRONICS CO., LTD.	
PART NUMBER:			TITLE:	
XB-104315862			TYPE C 16PIN 立式SMT 带柱 防水型 H7.85mm	
APPD:			DWG NO.:	
			C-104315862-00	
			SCALE	
			1:1	
			SHEET	
			1/2	
			REV.	
			A0	