

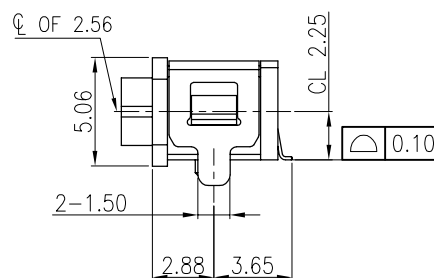
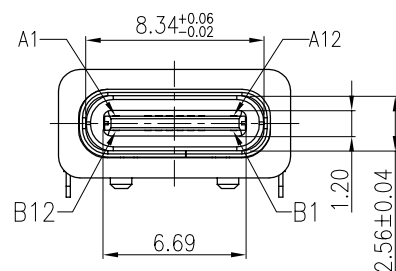
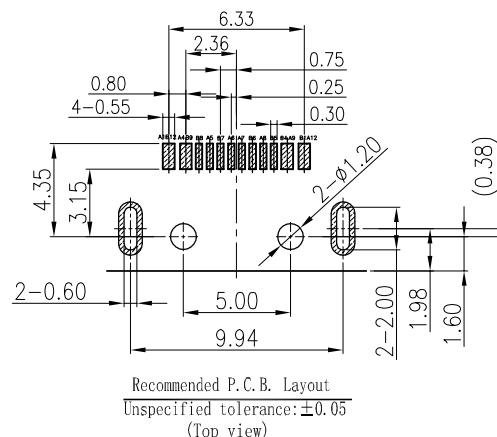
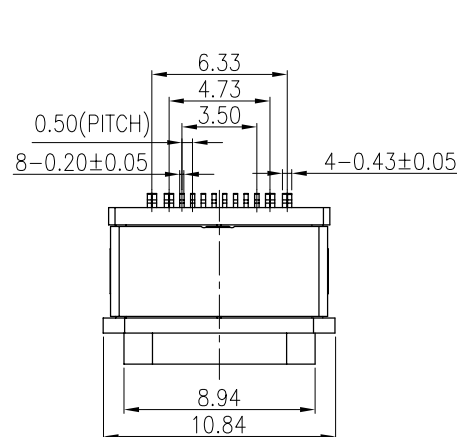


RoHS



REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	03/21'21	BX		MOON

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY:10,000 CYCLES
9. WATER PROOFNESS:THIS PRODUCT IS BASED ON IPX8.




A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

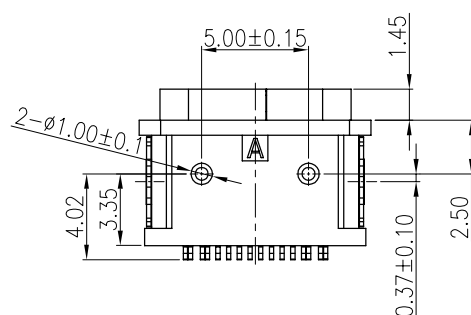

PART No.:

USB SERIES
PLATING:
31: Au1u"+G/F

104315932

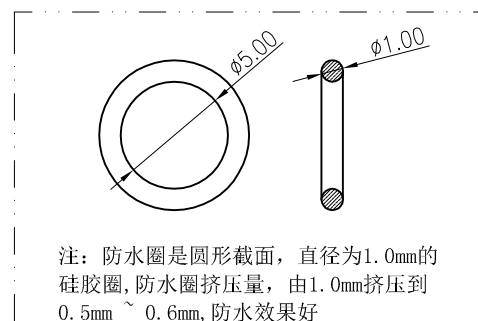PAKING:
2: REEL
SERIAL NO.

5	Shell2	1	SUS301 Ni Plating T=0.20mm	Ni:40u"Min;
4	Shell1	1	SUS301 Ni Plating T=0.25mm	Ni:40u"Min;
3	Housing2	1	PA10T(G.F30%)	BLACK
2	Contact	6	Phosphor bronze C5210R-EH Au/Ni Plating T=0.20mm	Ni:40u"Min; Au:CONTACT AREA:3u", OTHER AREA:G/F
1	Housing	1	PA10T (G.F30%)	BLACK
ITEM	PART NAME	Q'TY	FINISH	NOTE

MILLIMETERS	INCH	UNITS
X° ± 2°	X° ± 2°	MM
.X ± 0.30	.XX ± 0.012	MAT'L
.XX ± 0.20	.XXX ± 0.008	SEE NOTES
.XXX ± 0.10	.XXXX ± 0.004	FINISH
		SEE NOTES
		QTY
		SEE NOTES

XGB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.


PART NUMBER:
XB-104315932TITLE:
TYPE-C 16PIN板上CH2.25带柱 两脚插
板 防水型母座

APPD:

DWG NO.:
C-104315932-00


CHKD:

DR:



SCALE	SHEET	REV.
1:1	1/2	A0

F

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.									
X° ± 2°	X° ± 2°	MAT'L	PART NUMBER: XB-104315932		TITLE: TYPE-C 16PIN板上CH2.25带柱 两脚插板 防水型母座							
.X ± 0.30	.XX ± 0.012	SEE NOTES										
.XX ± 0.20	.XXX ± 0.008	FINISH	APPD: DWG NO.: C-104315932-00		 <table border="1"> <tr> <th>SCALE</th> <th>SHEET</th> <th>REV.</th> </tr> <tr> <td>1:1</td> <td>2/2</td> <td>AO</td> </tr> </table>		SCALE	SHEET	REV.	1:1	2/2	AO
SCALE	SHEET	REV.										
1:1	2/2	AO										
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	CHKD: DR:									
		QTY										
		SEE NOTES										

5