
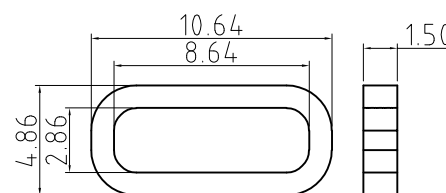


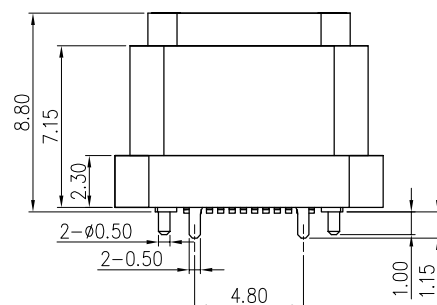



RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'20	BX	/	MOON

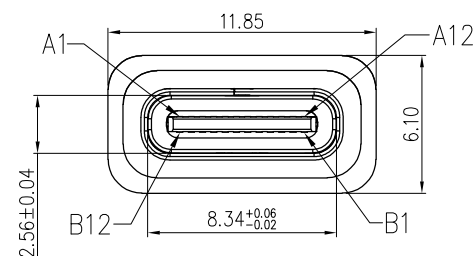

建议胶圈尺寸

NOTES:

1. MATERIAL:

- 1.1 Housing: High Temperature Thermoplastic ; Color Black.
- 1.2 Contact: Copper Alloy ; Au/Ni Plated
- 1.3 Shell: Stainless Steel.
- 1.4 Shell Housing: High Temperature Thermoplastic ; Color Black.
- 1.5 SHIELDING PLATE: Stainless Steel. Ni Plated
- 1.6 waterproof ring: silica gel ; Color Black.



2. SPECIFICATION:

- 2.1. CURRENT RATING: 3.0A MAX
- 2.2. DIELECTRIC WITHSTAND VOLTAGE: 100VAC
- 2.3. TEMPERATURE RANGE: -30 °C ~ 85 °C
- 2.4. CONTACT RESISTANCE: 40 MILLIONHM MAX
- 2.5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
- 2.6. INSERTION FORCE : 5N~20N
- 2.7. UNMATING FORCE: 8N~20N
- 2.8. DURABILITY: 10,000 CYCLES

PART No.:

USB SERIES
PLATING:
31: G/F

104317992

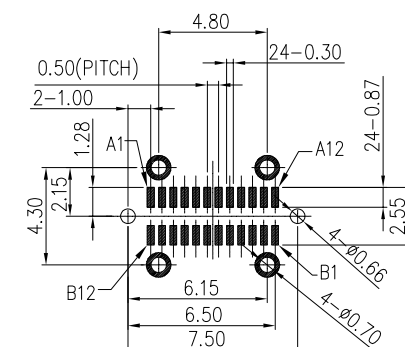PAKING:
2: REEL
SERIAL NO.RECOMMENDED P.C.B. LAYOUT (T: 1.00mm)
TOLERANCE UNSPECIFIED ±0.05mm

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

MILLIMETERS	INCH	UNITS	MM
X° ± 2°	X° ± 2°	MAT'L	
.X ± 0.38	.XX ± 0.015	SEE NOTES	
.XX ± 0.25	.XXX ± 0.010	FINISH	
.XXX ± 0.15	.XXXX ± 0.006	SEE NOTES	
		QTY	
		SEE NOTES	

XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
PART NUMBER: XB-104317992	TITLE: 直立式防水TYPE C 24Pin SMT H8.8mm
APPD:	DWG NO.: C-104317992-00
CHKD:	
DR:	
	SCALE 1:1
	SHEET 1/2
	REV. A0

RoHS

User Direction of Unreeling

11.50±0.10
1.75±0.10
12.00±0.10
4.00±0.10
2.00±0.10
ø1.50+0.10/-0.00
24.00±0.30

COVER TAPE PEELING ANGLE: 165°~180°
PEELING FORCE: 20~130g
CARRIER TAPE

User Direction of Unreeling

1.90±0.40
120.00°
ø13.00
10.50
DETAIL B

NOTES

1. NUMBER OF CONNECTORS: 500PCS/REEL
2. LEAD TAPE LENGTH

COVER TAPE (300mm Min)

PART 500PCS

LEADER 228mm MIN

COMPONENT SUPPLIER

TRAILER 228mm MIN

3. QUANTITY: 5000PCS/CARTON

4--TRIANGLE PARTITION

10--REEL

TAPE ON


LABEL

CARTON


MILLIMETERS	INCH	UNITS	MM
X* ± 2*	X* ± 2*	MAT'L	
.X ± 0.30	.XX ± 0.012	SEE NOTES	
.XX ± 0.20	.XXX ± 0.008	FINISH	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	
		QTY	
		SEE NOTES	

XIB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
PART NUMBER: XB-104317992	TITLE: 直立式防水TYPE C 24Pin SMT BR. 8mm
APPD:	DWG NO.: C-104317992-00
CHKD:	
DR:	
SCALE 1:1	SHEET 2/2
REV. A0	

1. NUMBER OF CONNECTORS: 500PCS/REEL
2. LEAD TAPE LENGTH

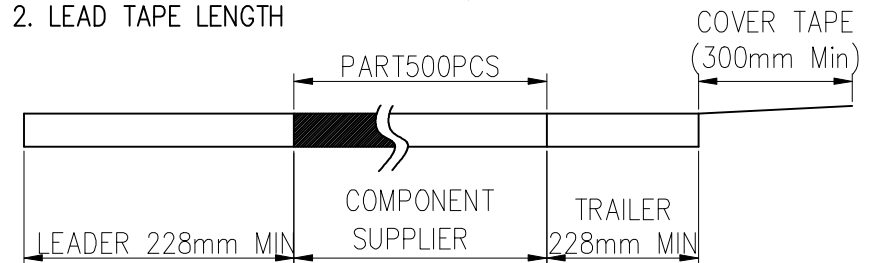

3.QUANTITY: 5000PCS/CARTON

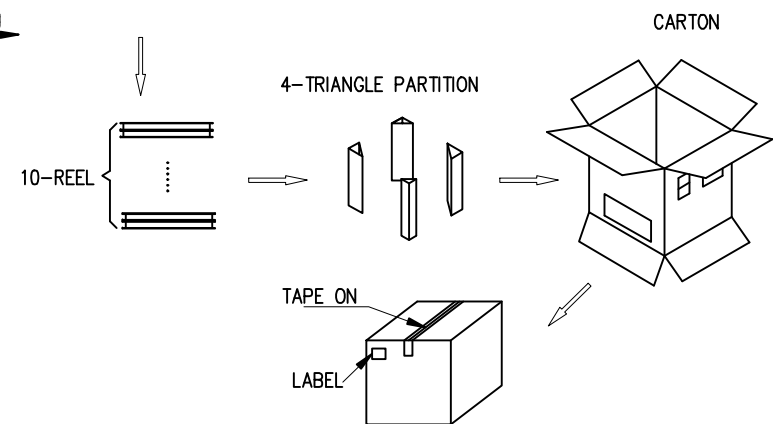

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
X° ± 2'	X° ± 2'	MAT'L	PART NUMBER:		TITLE:		
.X ± 0.30	.XX ± 0.012	SEE NOTES	XB-104317992		直立式防水TYPE C 24Pin SMT BR.8mm		
.XX ± 0.20	.XXX ± 0.008	FINISH	APPD:		DWG NO.:		
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	CHKD:		C-104317992-00		
		QTY	DR:				
		SEE NOTES			SCALE	SHEET	REV.
					1:1	2/2	A0