


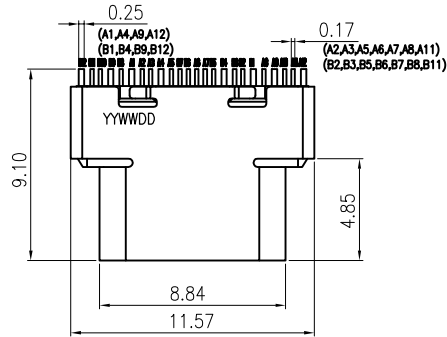
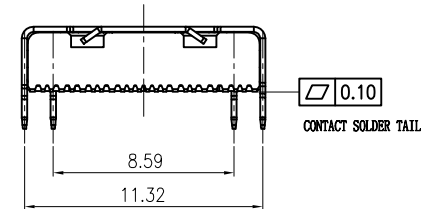


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
X0		NEW RELEASE	06/29'21	TEDDY	TEDDY	HAIYONG

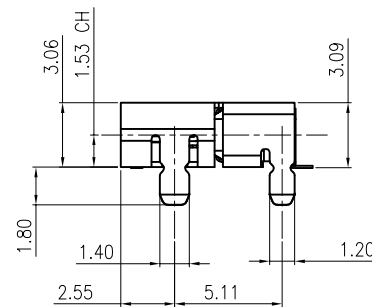

PIN ASSIGNMENT											
A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	SSTXp1	SSTXn1	VBUS	CC1	Dp1	Dn1	SBU1	VBUS	SSRXn2	SSRXp2	GND
GND	SSRXp1	SSRXn1	VBUS	SBU2	Dn2	Dp2	CC2	VBUS	SSRXn2	SSTXp2	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1


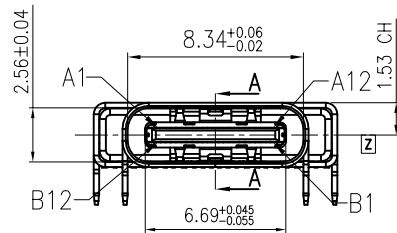


DATE CODE NOTE: YYWWDD

DD :01 MONDAY
.....
07 SUNDAY

WW: 01:1WEEK
.....
56:56WEEK

YY:17:2017YEAR

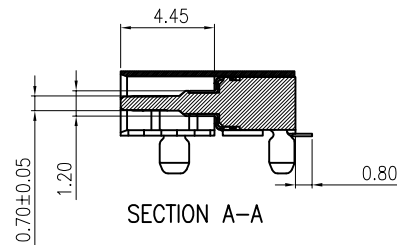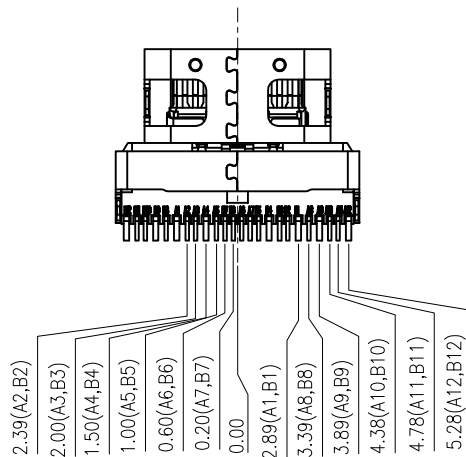


6	SHELL	1	STAINLESS STEEL	SOLDER AREA G/F OVER NI 50u" min
5	EMC	2	STAINLESS STEEL	CLEAN
4	MOLDING1	3	LCP UL94V-0	BLACK
3	GROUND PLATE	1	STAINLESS STEEL	CLEAN
2	DOWN CONTACT	12	HIGH CONDUCTIVITY COPPER	CONTACT AREA Au 15u" min ,SOLDER AREA G/F OVER NI 50u" min
1	UP CONTACT	12		
ITEM	NAME	Q'TY	MATERIAC	FINISH


MILLIMETERS	INCH	UNITS	MM			
X° ± 2°	X° ± 2°	MAT'L				
.X ± 0.30	.XX ± 0.012	SEE NOTES				
.XX ± 0.20	.XXX ± 0.008	FINISH				
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES				
		QTY				
		SEE NOTES				

XG 东莞市溪榜电子有限公司		DONG GUAN XI BANG ELECTRONICS CO., LTD.	
PART NUMBER:		TITLE:	
XB-104362892		UC021-00B	
APPD:		TYPE C CH1.53 24PIN	
CHKD:		DWG NO.:	
DR:		C-104362892-00	
		SCALE	SHEET
		1:1	1/3
		REV.	X1

F

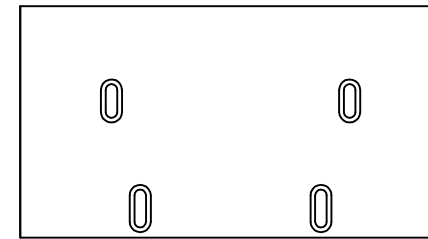

B2 B1 B10 B9 B8 A1 A2 A3 A4 A5 B7 B6A6 A7B5 B4 B3 B2 B1 A8 A9 A10 A11 A12

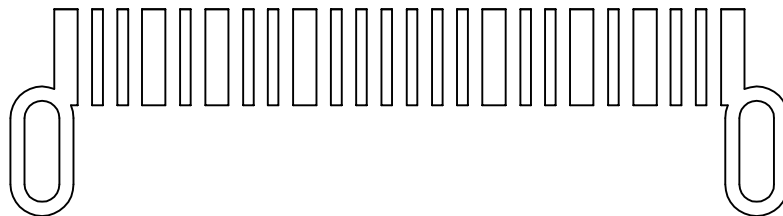


- NOTES:
1. Operating condition: Temperature $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$;
Humidity 80% R.H MAX
 2. MECHANICAL PERFORMANCE
 - 2.1 Insertion Force: $5 \sim 20\text{N}$.
 - 2.2 Withdrawal Force: $8 \sim 20\text{N}$. $1 \sim 1000$ CYCLES
 $6 \sim 20\text{N}$ $1001 \sim 10000$ CYCLES
 - 2.3 Durability: 10000 Cycles Min.
 3. ELECTRICAL PERFORMANCE:
 - 3.1 Rated voltage: AC 20V RMS
 - 3.2 Rated current: 1.25A FOR (A1,A4,A9,A12,B1,B4,B9,B12)
 0.25A FOR OTHER PER PIN
 - 3.3 Contact Resistance: $40\text{m}\Omega$ MAX
 4. PLEASE CONTACT JBL SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
X° ± 2°	X° ± 2°	MAT'L						
.X ± 0.30	.XX ± 0.012	SEE NOTES						
.XX ± 0.20	.XXX ± 0.008	FINISH						
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES						
		QTY	PART NUMBER:	TITLE:				
		SEE NOTES	XB-104362892	UC021-00B TYPE C CH1.53 24PIN				
			APPD:	DWG NO.: C-104362892-00				
			CHKD:					
	DR:	<table><tr><th>SCALE</th><th>SHEET</th><th>REV.</th></tr><tr><td>1:1</td><td>2/3</td><td>X1</td></tr></table>	SCALE		SHEET	REV.	1:1	2/3
SCALE	SHEET	REV.						
1:1	2/3	X1						


RoHS

USER DIRECTION OF UNREELING

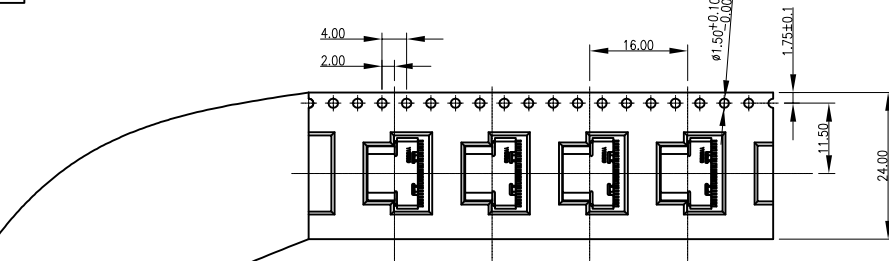

NOTES

1. NUMBER OF CONNECTORS:700PCS/REEL
2. LEAD TAPE LENGTH

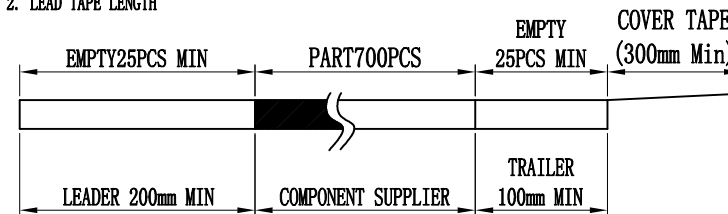


3. QUANTITY:7000PCS/CARTON


COVER TAPE PEELING ANGLE:165°~180°

PEELING FORCE:20~130g

CARRIER TAPE

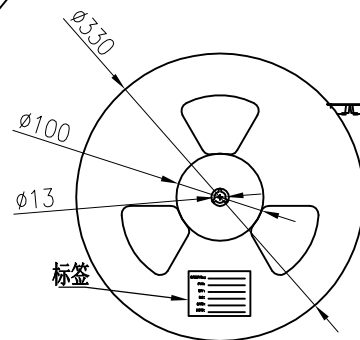


标签




10 Reels

Each top of the bottom of the carton is protected by a piece of pearl cotton

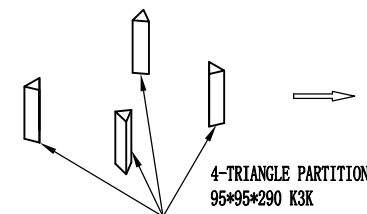


4-TRIANGLE PARTITION
95*95*290 K3K



10 rolls per carton

Tape type sealing box




RoHS

LABEL

CARTON

395*395*340 K=K

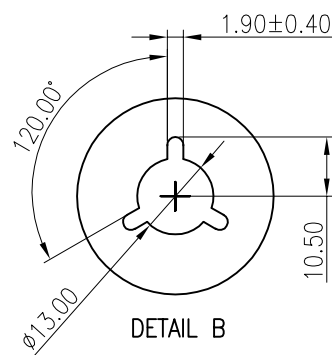

DETAIL B

DETAIL 1(Scale:8:1)

MILLIMETERS	INCH	UNITS	MM	东莞市溪榜电子有限公司			
X° ± 2°	X° ± 2°	MAT'L		DONG GUAN XI BANG ELECTRONICS CO., LTD.			
.X ± 0.30	.XX ± 0.012	SEE NOTES		PART NUMBER:		TITLE:	
.XX ± 0.20	.XXX ± 0.008	FINISH		XB-104362892		UC021-00B	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES		APPD:		TYPE C CH1.53 24PIN 客户图	
				CHKD:		DWG NO.:	
				DR:		C-104362892-00	
						SCALE	SHEET
						1:1	3/3
						REV.	X1