

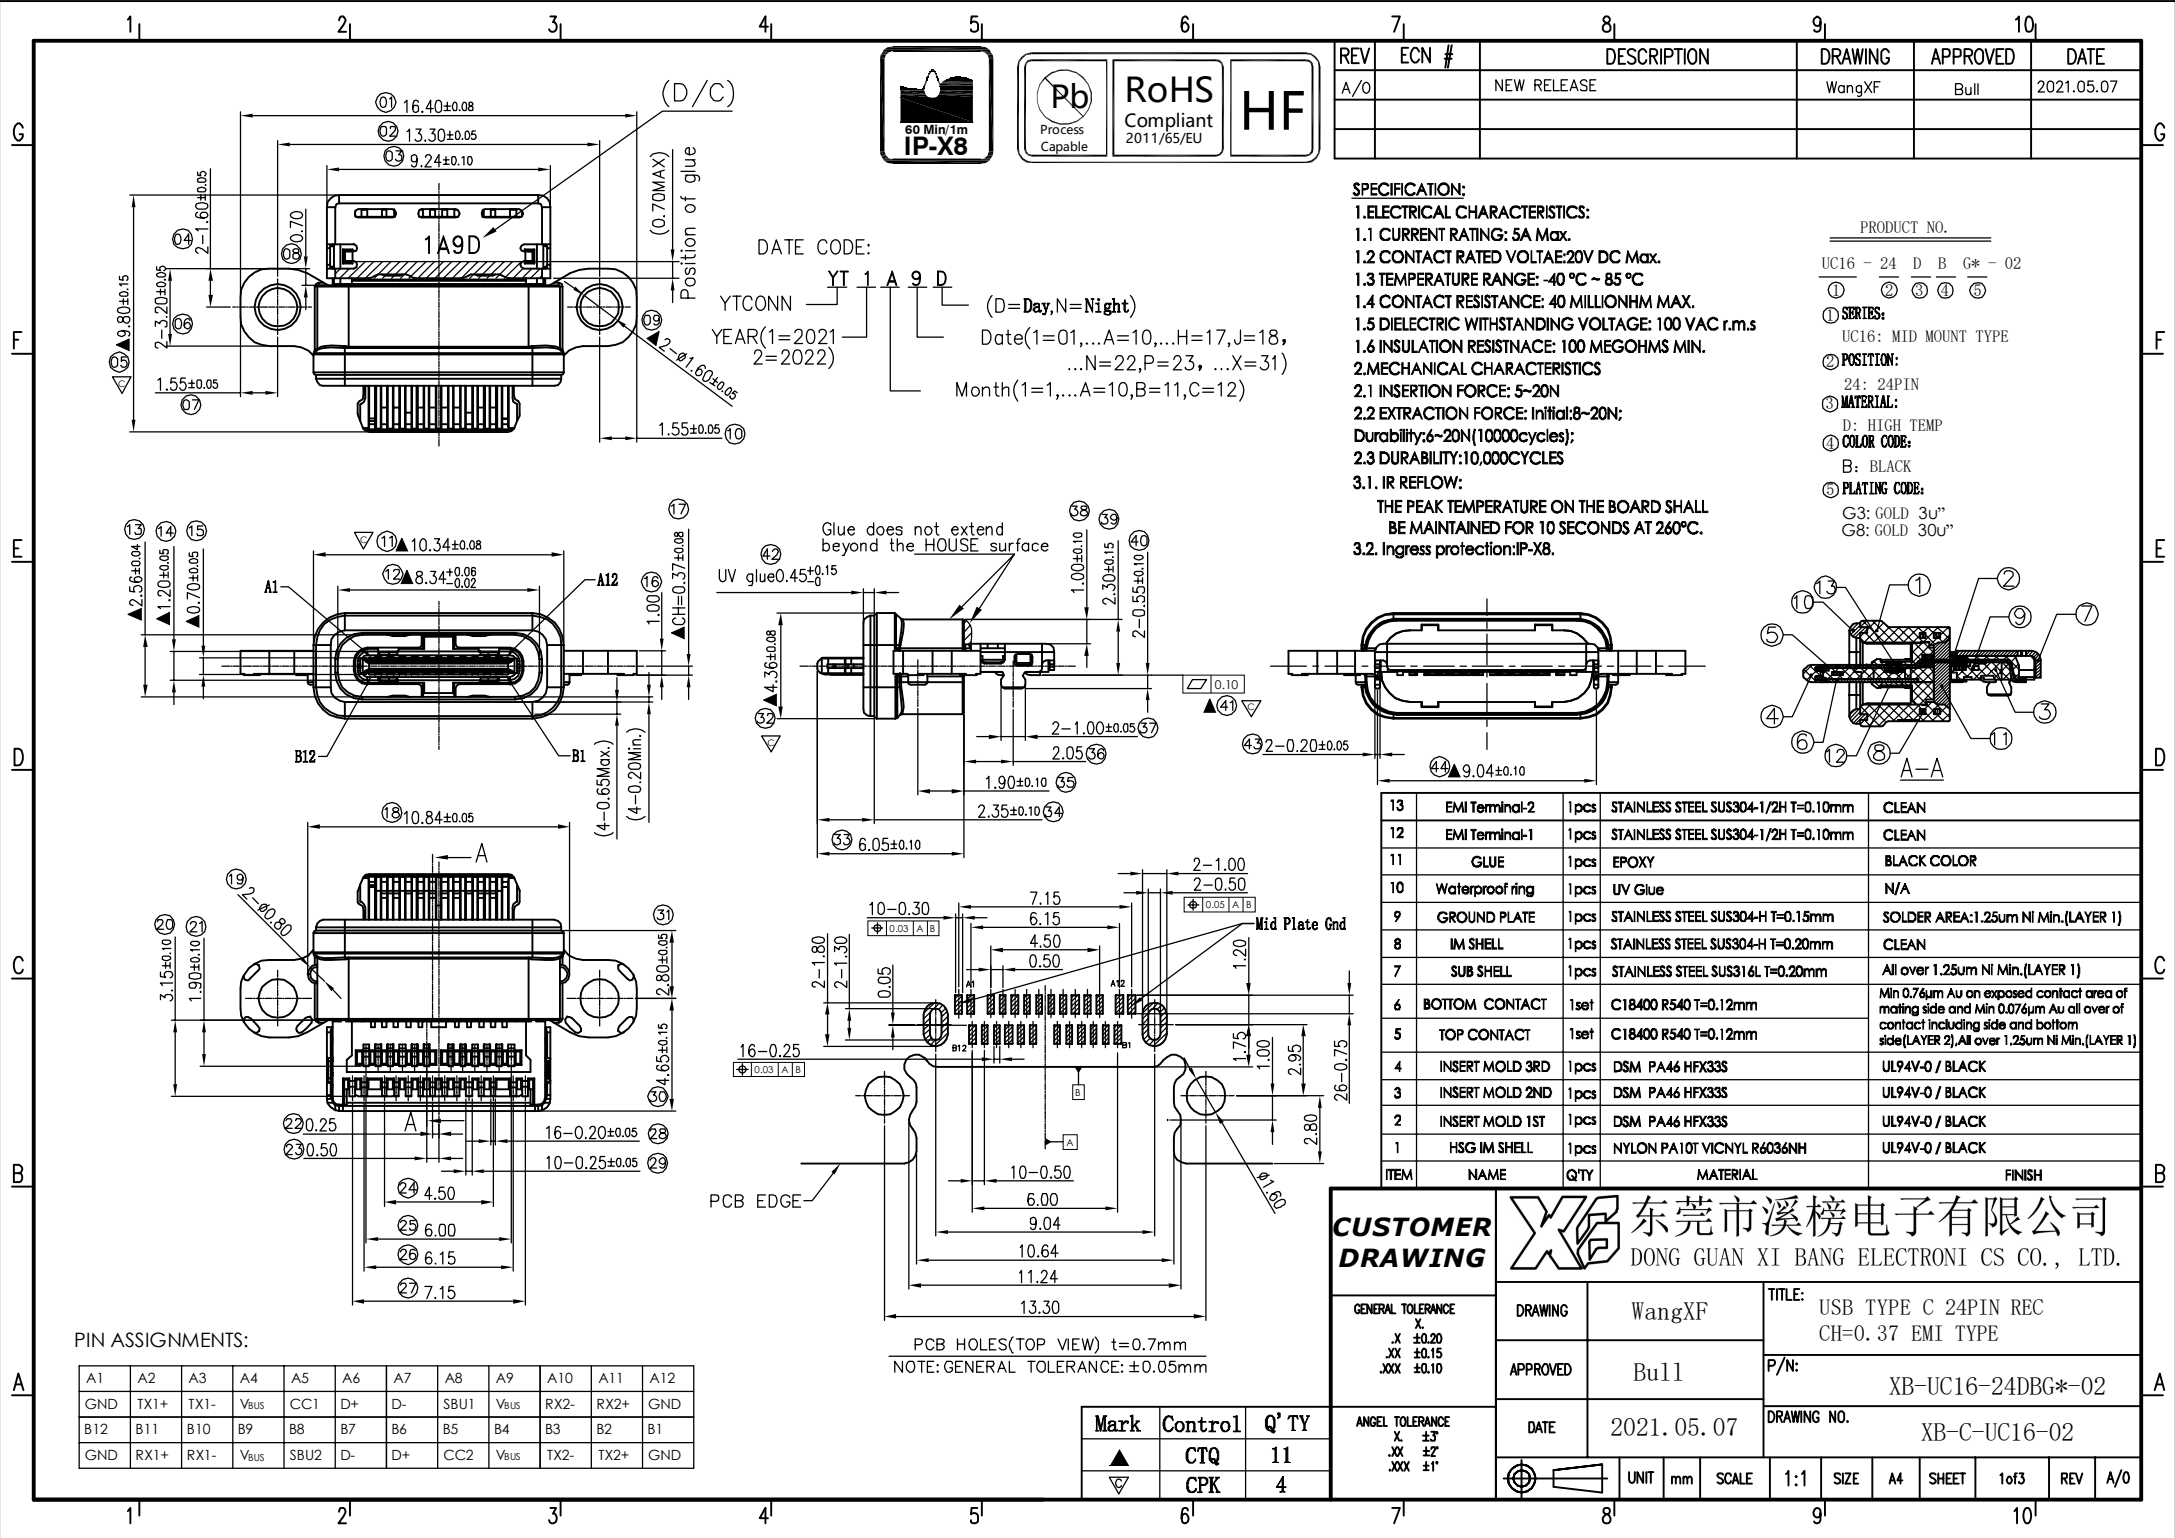




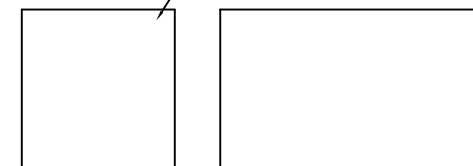



1. Reel : 850pcs/ Reel.
2. Carton : 8500pcs/ 10 Reel/ Carton.



REMARK:

- 1) If there are empty boxes, they must be filled with cushioning material;
- 2) Handle with care during handling;
- 3) During transportation, it is not allowed to stack too much and there should be no heavy pressure;
- 4) The upper belt must be flat when sticking the lower tape, and there should be no bubble at the adhesive position.

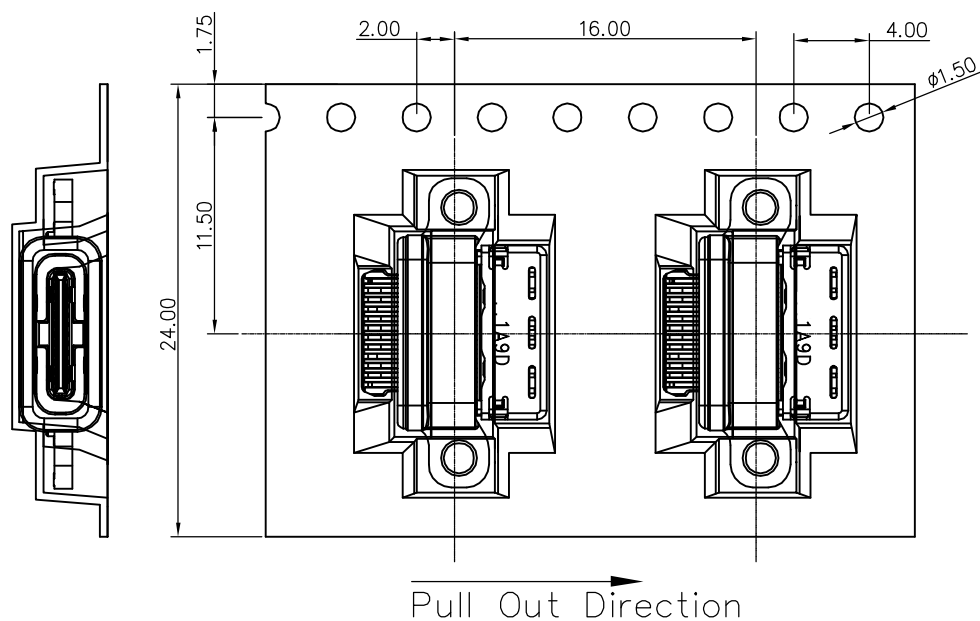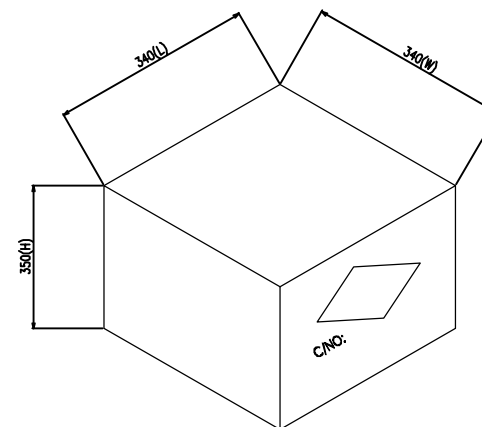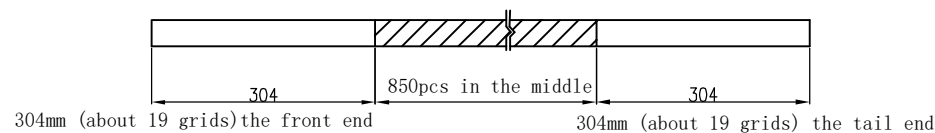

CUSTOMER DRAWING	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.											
	GENERAL TOLERANCE X. .X ±0.20 .XX ±0.15 .XXX ±0.10	DRAWING	WangXF			TITLE: USB TYPE C 24PIN REC CH=0.37 EMI TYPE						
		APPROVED	Bull			P/N: XB-UC16-24DBG*-02						
ANGEL TOLERANCE X. ±3° .XX ±2° .XXX ±1°	DATE	2021.05.07			DRAWING NO. XB-C-UC16-02							
 UNITmmSCALE1:1SIZEA4SHEET3of3REV A/0												