

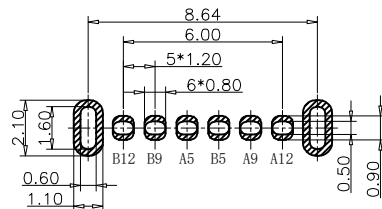


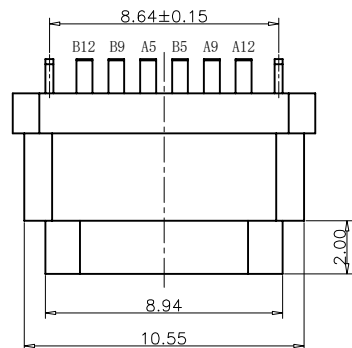



专利产品

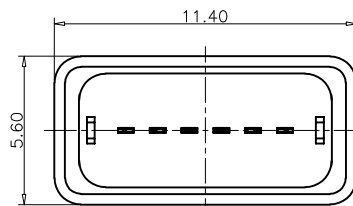

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05



装前塞示意图

备注 (NOTE):

1. 电气特性:

1.1. 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.

1.2. 接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.

1.3. 额定电压: 5V.

1.4. 耐受电压: 100VAC.

1.5. 绝缘电阻: 至少100兆欧.

2. 机械性能:

3.1. 插入力: 0.5-2.0Kg

3.2. 拔出力: 0.6-2.04Kg

3.3. 插拔次数: 10000次.

4. 工作环境: -20℃ to +85℃.

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
		B12	GND
		B9	VBUS
A5	CC1		
		B5	CC2
A9	VBUS		
A12	GND		

TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	STAINLESS STEEL, NI PLATED
2	CONTACT	6	COPPER STEEL, TIN/AU/NI PLATED
3	1MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
4	2MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0

XGB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

品名 (ITEM NO) TYPE C 6P 立插防水母座H=6.8mm (E款)

料号 (PART NO) XB-ATCF-06-001

图号 (DWG NO) XB-ATCF-06-001

页码 (SHEET)

1/1

单位 (UNIT): MM

版本 (REV)

A0

比例 (SCALE) 1:1

日期 (DATE)

2021.08.25

设计 (DESIGN)

Lee

审核 (CHECKED)

——

核准 (APPROVED)

LSW

未注公差

TOLERANCE UNSPECIFIED

X. X ± 0.20

X. XX ± 0.15

X. XXX ± 0.10

X° $\pm 5^\circ$

X. X° $\pm 2^\circ$

These drawings and specifications are Dongguan Xibang Electronics Co., Ltd. The property should not be copied. Without Dongguan Xibang Electronics Co., Ltd Prior written consent to copy or use in any way