
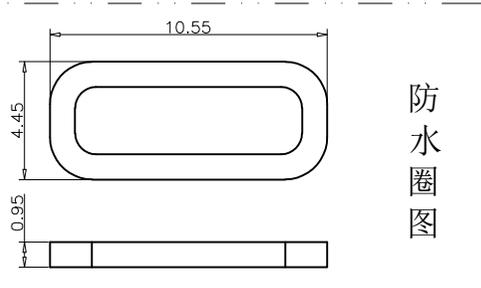
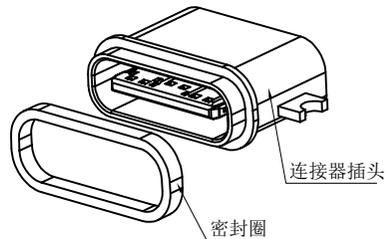
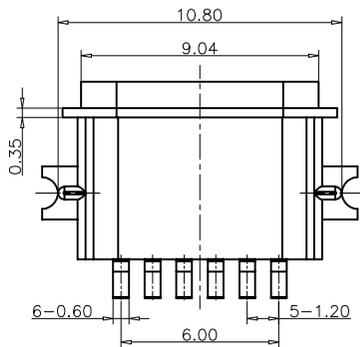

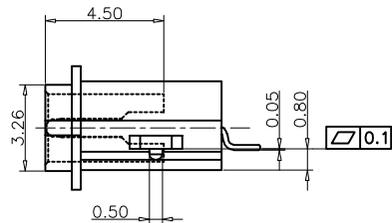
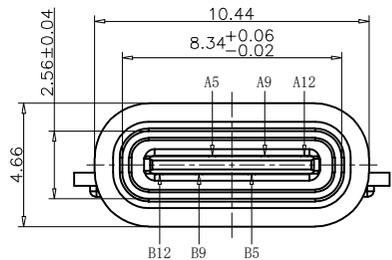
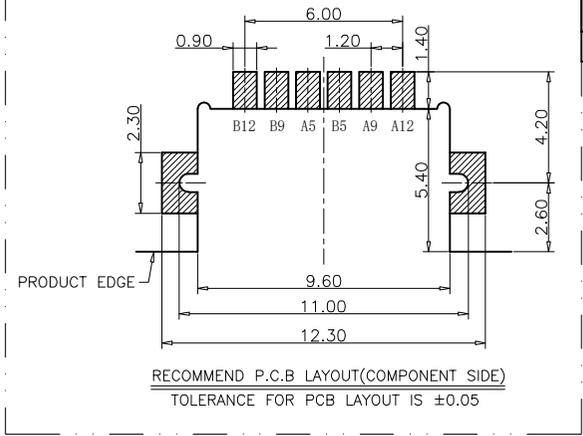


专利产品

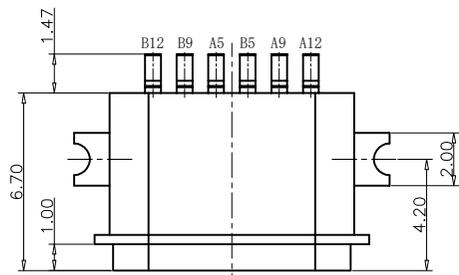

USB TYPE C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
		B12	GND
		B9	VBUS
A5	CC1		
		B5	CC2
A9	VBUS		
A12	GND		

备注 (NOTE):

- 电气特性:
 - 接触区: 接触电阻40mΩ Max, 允许10mΩ变化量. 测试条件: 20mv, 100mA下测量.
 - 接触电流: 3A VBUS引脚; 1.25A用于GND引脚; 其他引脚为0.25A.
 - 额定电压: 5V.
 - 耐电压: 100VAC.
 - 绝缘电阻: 至少100兆欧.
- 机械性能:
 - 插入力: 0.5-2.0Kg
 - 拔出力: 0.6-2.04Kg
 - 插拔次数: 10000次.
 - 工作环境: -20°C to +85°C.

TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	ZINC ALLOY, NI30u"Min PLATED
2	CONTACT	6	C2680, TIN80u"/Au1u"/NI30u" PLATED
3	1MD HOUSING	1	LCP UL94 V-0 BLACK
4	WATERPROOF RING	1	SILICONE UL94 V-0 BLACK

品名 (ITEM NO) TYPE C 6P 沉板0.8防水母座L=6.7mm(外壳锌合金)

料号 (PART NO) XB-ATCF-06-009

图号 (DWG NO) XB-TCF-015

页码 (SHEET) 1/1 单位 (UNIT): MM

版本 (REV) A0 比例 (SCALE) 1:1

日期 (DATE) 2021.08.30

设计 (DESIGN) Lee

审核 (CHECKED)

核准 (APPROVED) LSW

未注公差	
TOLERANCE	UNSPECIFIED
X.X	±0.20
X.XX	±0.15
X.XXX	±0.10
X°	±5°
X.X°	±2°