




专利产品



区别在此尾部

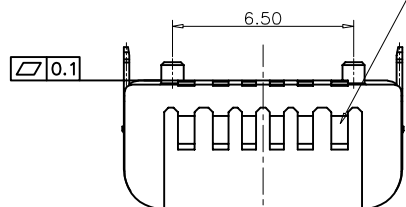


2-0.50
2-0.60
2-0.56

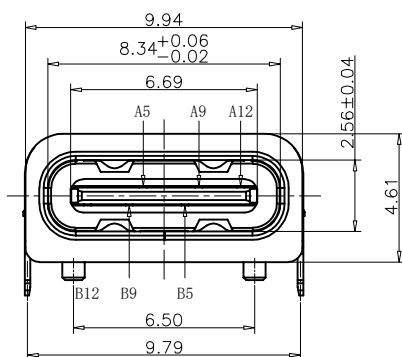


PIN ASSIGNMENT:

PIN NO	A1&B12	A4&B9	A5	B5	A9&B4	A12&B1
SIGNAL NAME	GND	VBUS	CC1	CC2	VBUS	GND
PCB PAD NO.	C1	C2	C3	C4	C5	C6

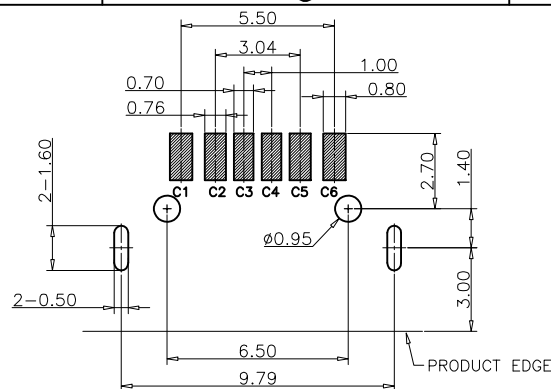

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05




NOTES:

SPECIFICATION:

1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: $-30^{\circ}\text{C} \sim +85^{\circ}\text{C}$
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN
6. INSERTION FORCE: 5N~20N
7. UNMATING FORCE: 8N-20N
8. DURABILITY: 10000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX7.

REV.	ECN	DESCRIPTION	MDF'D	DATE
A0		新订图面	Lee	2019. 11. 13

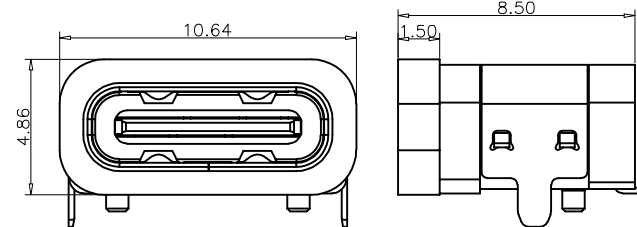

加防水圈示意图

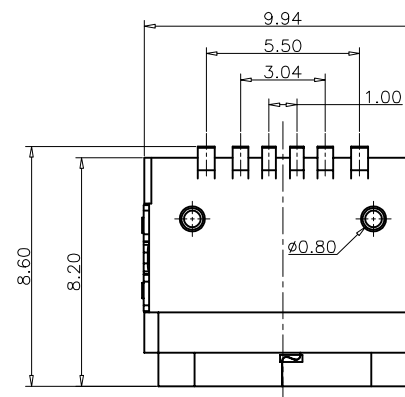


TABLE:

NO	PART	Q'TY	Material
1	SHELL	1	STAINLESS STEEL, NI PLATED
2	CONTACT	6	COPPER STEEL, TIN/Au/NI PLATED
3	MID PLATE	1	STAINLESS STEEL, NO PLATING
4	1MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
5	2MD HOUSING	1	HIGH TEMPERATURE RESISTANT PLASTIC BLACK UL94 V-0
6	SHIELDING PLATE	1	STAINLESS STEEL, NI PLATED



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

品名 (ITEM NO)	TYPE C 6P 板上防水母座-减胶A款 (外壳2脚插板, 端子SMT)
料号 (PART NO)	XB-ATCF-06-023
图号 (DWG NO)	XB-TCF-043

页码 (SHEET)	1/1	单位 (UNIT): MM
版本 (REV)	A0	比例 (SCALE) 1:1
日期 (DATE)	2019. 11. 13	未注公差 TOLERANCE UNSPECIFIED
设计 (DESIGN)	Lee	X.X ± 0.20
审核 (CHECKED)	L S W	X.XX ± 0.15
核准 (APPROVED)	C J L	X.XXX ± 0.10
		X° $\pm 5^{\circ}$
		X.X° $\pm 2^{\circ}$

These drawings and specifications are the property of Dongguan Xibang Electronics Co., Ltd. and should not be copied. Without the prior written consent of Dongguan Xibang Electronics Co., Ltd., it shall not be copied or used in any way