REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	---	新版本发行	SHI	DMX	2018.03.12

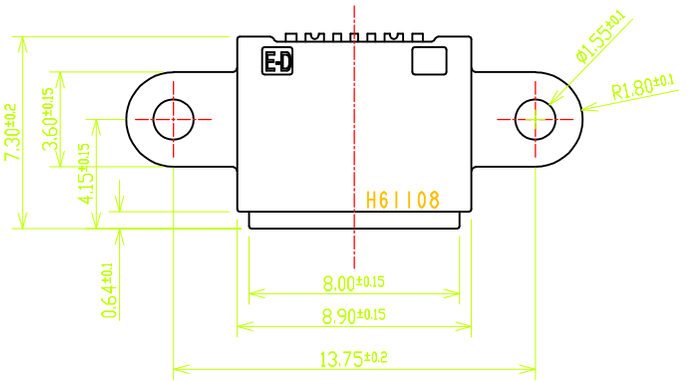

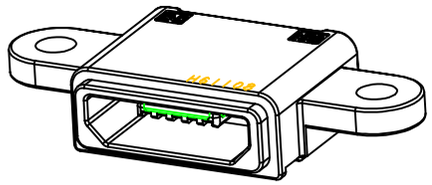

NOTES:
SPECIFICATION:
1. CURRENT RATING: 2.0A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. LNSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES

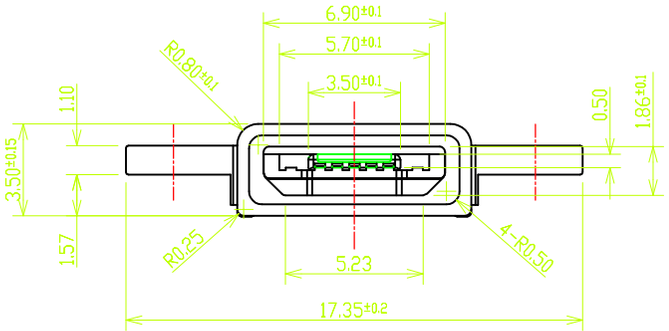

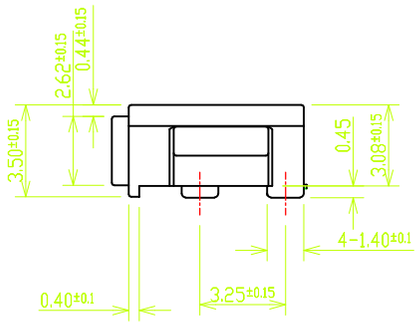

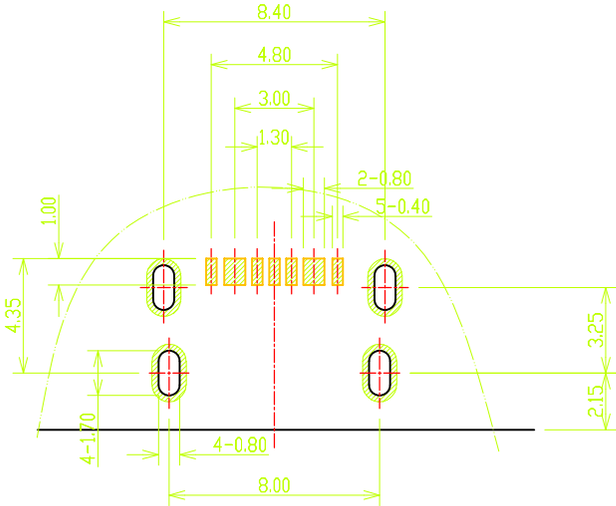

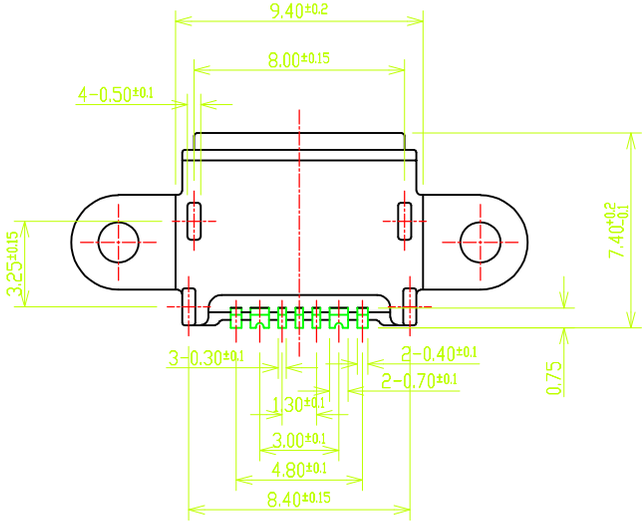

NO.	DESCRIPTION	MATERIAL	REMARKS	QTY
5	LIM	SILICON RUBBER		1PCS
4	MIM-SHELL	MIM-17-4PH+LIM	NI Plated	1PCS
3	PLATE	STAINLESS STEEL	-----	1SET
2	CONTACT	COPPER ALLOY	Au/NI Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS

TOLERANCE		NAME(INTENDED USE) CUSTOMER DRAWING	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.
X.X ±0.30	X.° ± 2°	PART NO.	TITLE: Micro USB 7PIN F TYPE 防水型 SMT CONN.
.XX ±0.20	.X° ± 1°		
.XXX ±0.10	.XX° ±0.5°		
UNITS	mm	APPD:	DRAWG NO. S7-A
MATERILA		CHED:	SCALE 1:1 / SHEET 1/1 / REV. A
FINISH		DRAW:	

REV.	ECN NO.	DESCRIPTION	DRAW	APPD.	DATE
A	–––	新版本发行	SHI	DMX	2018.03.12

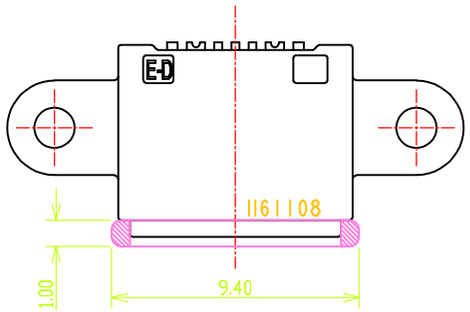

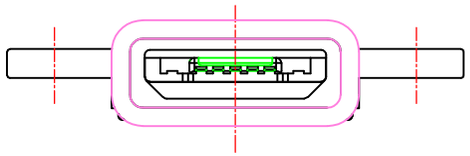



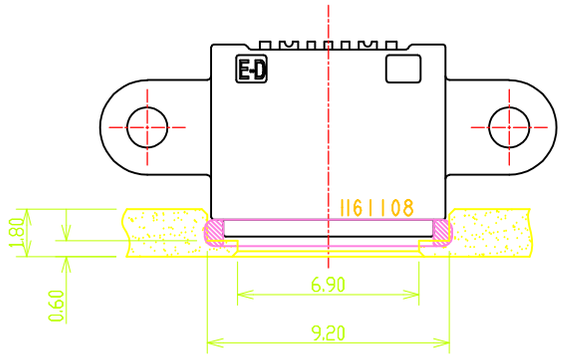

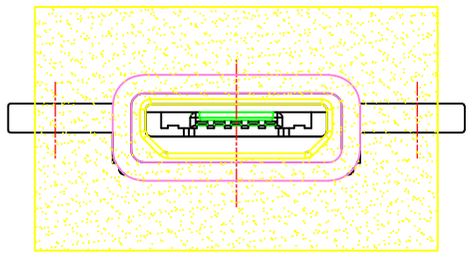

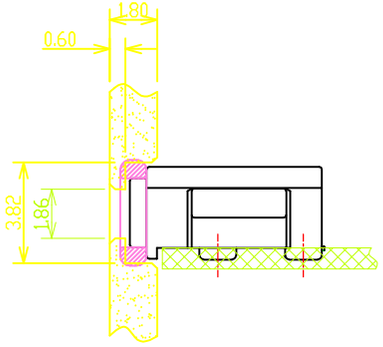

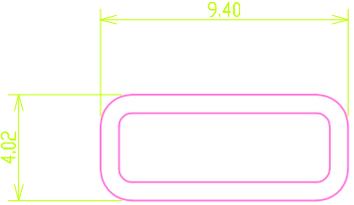



TOLERANCE		NAME(INTENDED USE)	东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.
X.X ±0.30	X.° ± 2°	PART NO.	TITLE: Micro USB 7PIN F TYPE 防水型 SMT CONN.
.XX ±0.20	.X° ± 1°		
.XXX ±0.10	.XX° ±0.5°	APPD:	DRAWG NO. S7–A(胶圈)
UNITS	mm	CHED:	SCALE 1:1 / SHEET 1/1 / REV. A
MATERILA		DRAW:	
FINISH			