


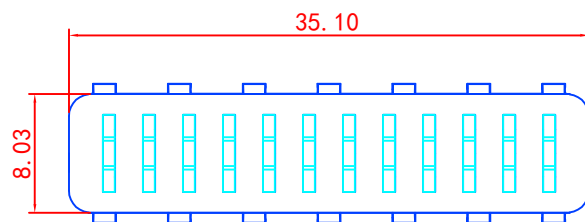



	B		A	
SYMBOL	REVISION		APPROVAL	DATE

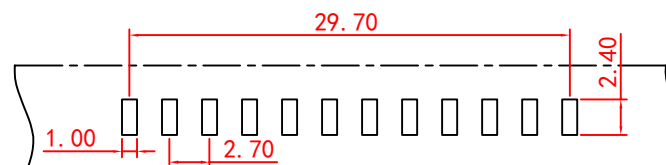

NOTE:
Material
Insulator: LCP
Contact: C7521
Contact Plated: Gold over Nickel
or Tin Specification
Current Rating: 12A
Instant Current: 15A
Rated Voltage: 12V
Contact Resistance: 30mΩ
Insulation Resistance: 100MΩ
Dielectric Voltage: 500V
Operating Temperature: -40 ° ~105 °

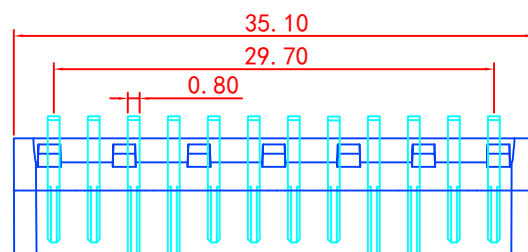

RECOMMENDED PCB LAYOUT
T=0.65MM,TOLERANCES $\pm$ 0.05MM

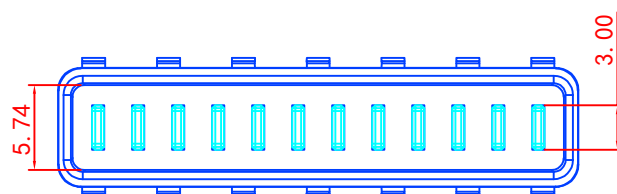

2	HOUSING	NYLON 9T	1	BLACK
1	CONTACT TERMINAL	PHOSPHOR BRONZE	9	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR			DRAWING	Zenq.Chen	DWG.No.	XB-27S-T12
PART NO.		XB-27S-T12/2.7间距公座			CHECK	Zenq.Chen	REV.	A1
	UNIT:	TOLERANCE	UP TO 5 ABOVE 5 ~30	±0.2 ±0.3	ANGLE	APPROVAL	DATE	2023-1-8
	mm	OTHERWISE	ABOVE 30 ANGLE	±0.5 ±.7	0°±3°	SCALE	2:1	PAGE 1 OF 1