
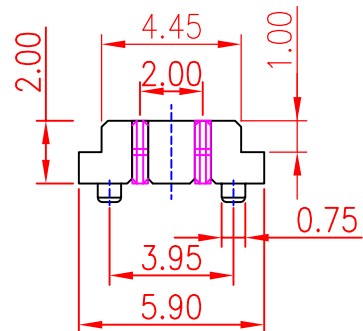
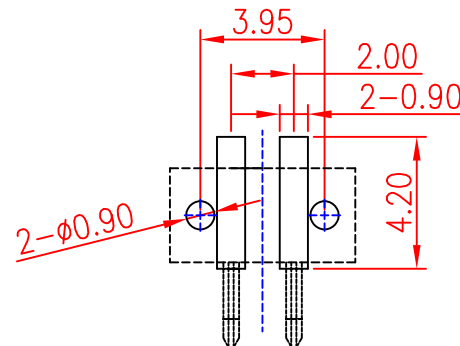




RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE

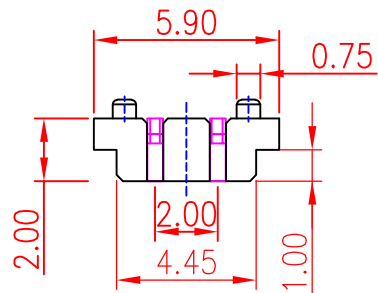

NOTE:

Material

Insulator: LCP

Contact: C2680

Contact Plated: Gold over Nickel or Tin

Specification

Current rating: 3A

instant CURRENT: 5A

Contact Resistance: 30mΩ

Insulation Resistance: 100MΩ

Dielectric Voltage: 500V

Operdting Temperature: -40°~105°

RECOMMENDED P.C.B LAYOUT
TOP VIEW (.XX±0.05)

2	HOUSING	LCP	1	GRAY
1	CONTACT TERMINAL	C2680	2	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	Y.C.Zhang	DWG.No.	
PART NO.		XB-A00M-2P-R5		CHECK	G.C.Chen	REV.	A1
	UNIT: mm	TOLERANCE	UP TO 5 ABOVE 5 ~30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3°	ANGLE 0°±3°	DATE	01-05-2020
		OTHERWISE				PAGE	1 OF 1