

F

E

D

C

B

A







RoHS
Compliant

SYMBOL

REVISION

APPROVAL

DATE

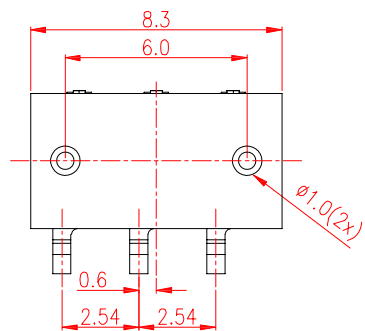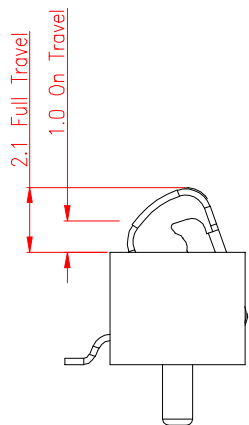

SPECIFICATIONS

1. ELECTRICAL CHARACTERISTICS:

1-1.RATING: DC 12V 3A max



1-2.CONTACT RESISTANCE: 20mΩ MAX(INITAL)

1-3.DIELECTRIC WITHSTANDING VOLTAGE:

500V AC FOR ONE MINUTE

1-4.INSULATION RESISTANCE: 100MΩ MIN,
MEASURED BY 500V DC

2. LIFE TEST:MECHANICAL LIFE TEST 5,000 CYCLES MIN

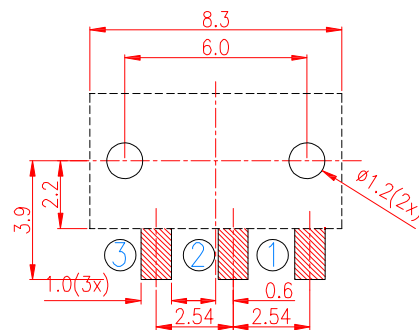P.C.B LAYOUT
TOP VIEW

CIRCUIT

2	HOUSING	LCP	1	BLACK
1	CONTACT TERMINAL	C5210	3	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME

CONNECTOR

DRAWING

DWG.No.

PART NO.

XB-BC-245-3P-L

CHECK

REV.

A0

UNIT :
mmTOLERANCE
OTHERWISEUP TO 5
ABOVE 5 ~30
ABOVE 30
ANGLE±0.2
±0.3
±0.5
±3°ANGLE
0°±3°

APPROVAL

SCALE

2:1

DATE

PAGE

1 OF 1

F

E

D

C

B

A