

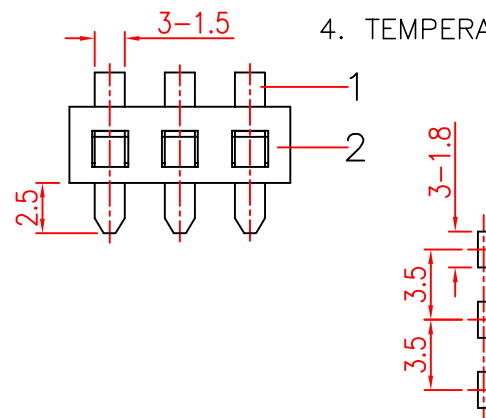


RoHS  
Compliant

| SYMBOL | REVISION | APPROVAL | DATE |
|--------|----------|----------|------|
|        |          |          |      |
|        |          |          |      |

## SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
  - 1-1.RATING: DC 12V 3A
  - 1-2.CONTACT RESISTANCE: 20mΩ MAX(INITAL)
  - 1-3.DIELECTRIC WITHSTANDING VOLTAGE:  
500V AC FOR ONE MINUTE
  - 1-4.INSULATION RESISTANCE: 100MΩ MIN,  
MEASURED BY 500V DC
- FORCE:0.6mm CONTACT TRAVEL:600gf Max.
- LIFE TEST:MECHANICAL LIFE TEST 20,000 CYCLES.
- TEMPERATURE RISE : 30°C MAX

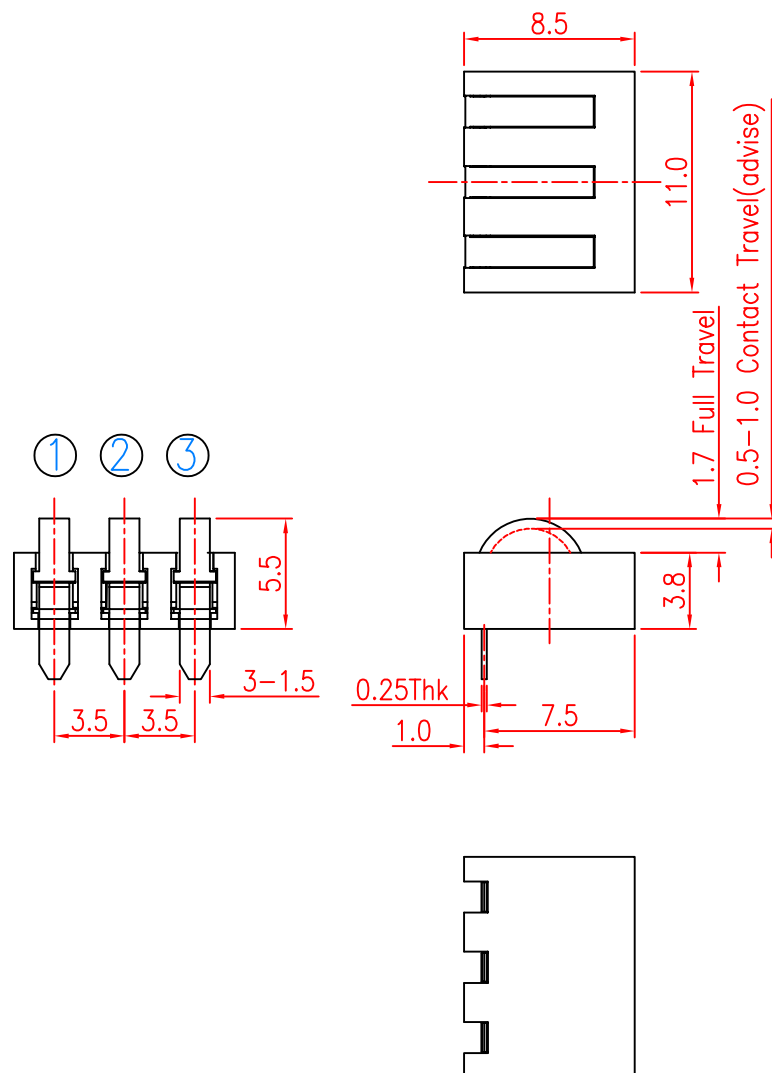

## P.C.B LAYOUT

## CIRCUIT

|              |                  |          |           |           |             |
|--------------|------------------|----------|-----------|-----------|-------------|
| 2            | HOUSING          | PPA      | 1         | BLACK     |             |
| 1            | CONTACT TERMINAL | C70350   | 3         | Au PLATED |             |
| NO.          | PARTS            | MATERIAL | QTY.      | FINISHING |             |
|              |                  | DRAWING  | ZENQ.Chen | DWG.No.   | XB-BC-35-3P |
| PH           |                  | CHECK    | ZENQ.Chen | REV.      | A0          |
| ±0.2<br>±0.3 | ANGLE            | APPROVAL |           | DATE      | 08-01-2016  |
| ±0.5<br>±3'  | 0°±3'            | SCALE    | 2:1       | PAGE      | 1 OF 1      |

**东莞市溪榜电子有限公司**  
DONG GUAN XI BANG ELECTRONICS CO., LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.