

F

E

D

C

B

A

RoHS
Compliant

SYMBOL


REVISION

APPROVAL

DATE


SPECIFICATIONS

- ELECTRICAL CHARACTERISTICS:
 - 1-1.RATING: DC 12V 3A
 - 1-2.CONTACT RESISTANCE: 20mΩ MAX(INITAL)
 - 1-3.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC FOR ONE MINUTE
 - 1-4.INSULATION RESISTANCE: 100MΩ MIN,
MEASURED BY 500V DC
- FORCE:0.6mm CONTACT TRAVEL:600gf Max.
- LIFE TEST:MECHANICAL LIFE TEST 20,000 CYCLES.
- TEMPERATURE RISE : 30°C MAX

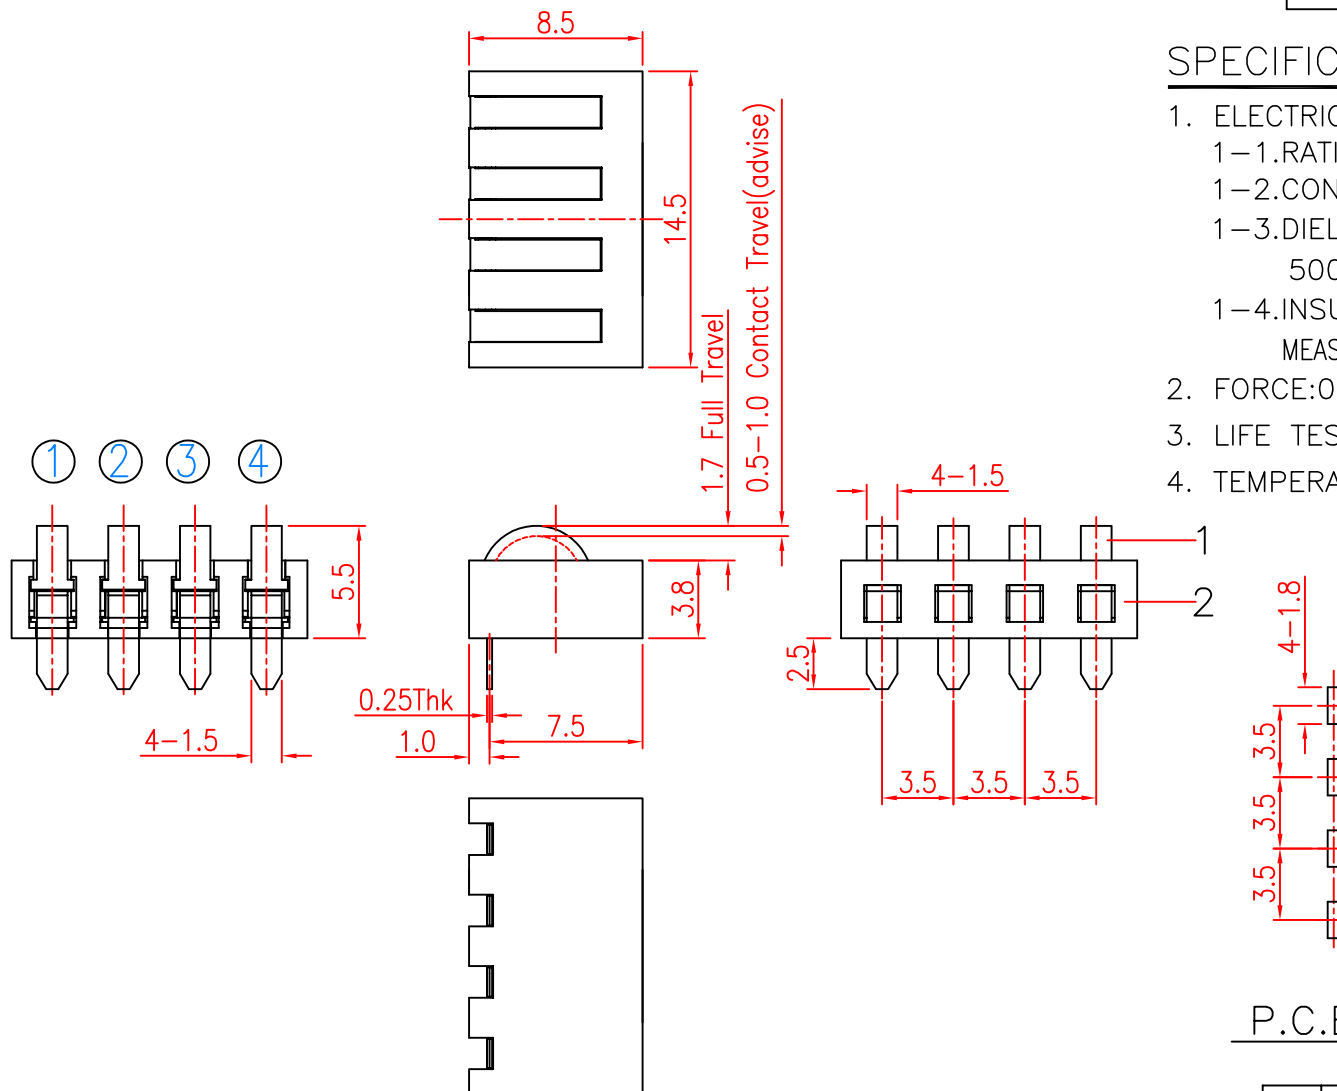

P.C.B LAYOUT

CIRCUIT



2	HOUSING	PPA	1	BLACK
1	CONTACT TERMINAL	C70350	4	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

XG 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

COPYRIGHT RESERVED,PLEASE DO NOT COPY.

PART NAME		CONNECTOR				DRAWING	ZENQ.Chen	DWG.No.	XB-BC-35-4P
PART NO.		5.5H-3.5PH				CHECK	ZENQ.Chen	REV.	A0
	UNIT :	TOLERANCE OTHERWISE	UP TO 5	±0.2	ANGLE	APPROVAL		DATE	08-01-2016
	mm		ABOVE 5 ~30	±0.3					
			ABOVE 30	±0.5					
					0°±3'	SCALE	2:1	PAGE	1 OF 1

F

E

D

C

B

A