
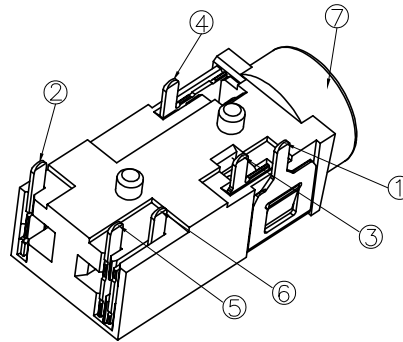
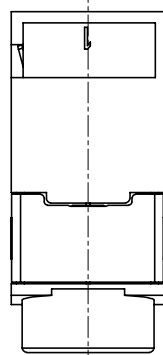


MODEL NO.:






XB-PJ-D3153A- A □□□ AU02 L- RH

(1) (2) (3) (4) (5) (6)

- (1) Series no.
(2) Schematic type: A
(3) Housing color:
BK7=Black
GRG=Green
(4) Terminal plating:
AU02=Plating AU 1" min.
(5) Packing mode:L=Reel packing
(6) Environmental requirements:
Rh=RoHS 2.0 + Halogen Free

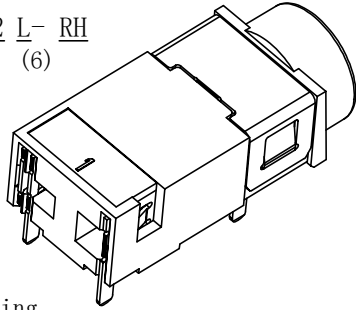

Matching Plug

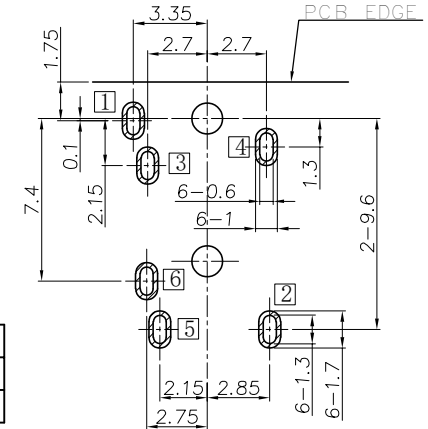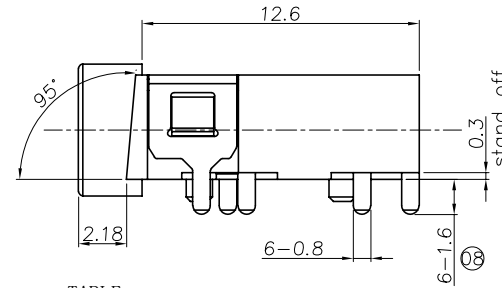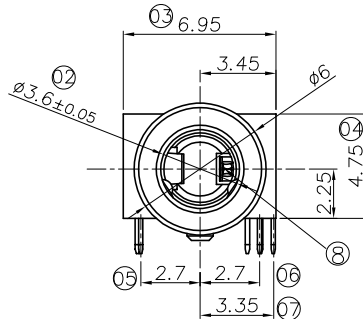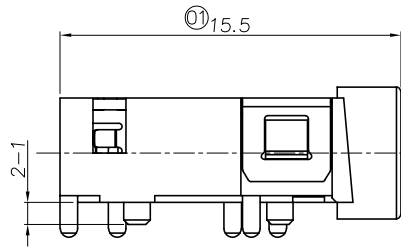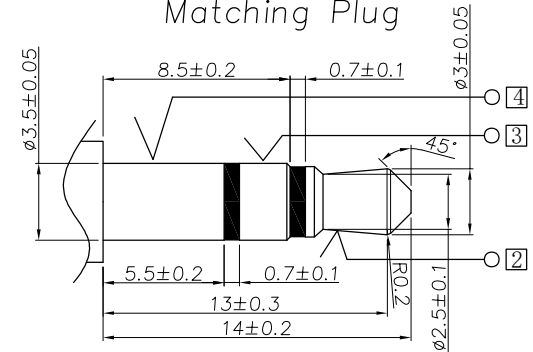

SPECIFICATION:

1. Electrical characteristics

- 1-1. Current rating:DC 1.0A.
1-2. Voltage rating:DC 12V.
1-3. Contact resistance:50mΩ max.
1-4. Insulation resistance:100MΩ min. at 500V DC.
1-5. Withstanding voltage:500V AC for 1 minute.

2. Mechanical characteristics

- 2-1. Life test:5000 cycles min,
2-2. Mating force:3~30N,
Unmating force:3~30N.

3. Salt spray test time:48 hours min.


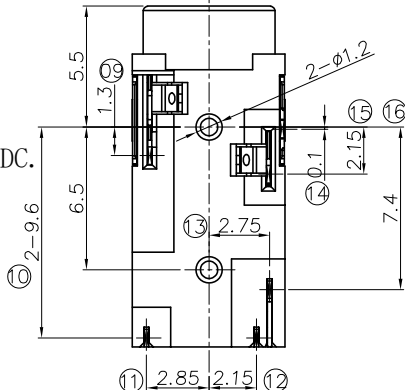


TABLE:

2	PJ-D3153A-AGRGAU02L-RH	粉绿 (577C)
1	PJ-D3153A-ABK7AU02L-RH	黑色
序号	适用物料编码	物料说明



Circuit Diagram

RECOMMENDED P. C. B LAYOUT
TOP VIEW (TOLRANCE:±0.05)

8	Insulator	1	PA10T R630NH+30%GF UL 94V-0	see table
7	Housing	1	PA10T R630NH+30%GF UL 94V-0	see table
6	Shunt	1	C5210R-EH, 0.20t	Gold Flash On Contact Area And Solder Tail , All over Nickel Plated
5	Transfer spring	1	C5210R-EH, 0.20t	
4	Ring spring	1	C5210R-EH, 0.20t	
3	Ring spring	1	C5210R-EH, 0.20t	
2	Tip spring	1	C5210R-EH, 0.20t	
1	Earth spring	1	C5191R-H, 0.20t	
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

						Angle	±2°	DESIGN	王朝荣	2015.03.10	
						10<L≤20	±0.3	CHECK			
						5<L≤10	±0.25	APPROVAL			
						L≤5	±0.20				
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: 3:1	UNIT:mm	A4	SHEET:1 of 1

TITLE:		Ø3.5mm PHONE JACK
MODEL NO.		XB-PJ-D3153A-A□□□AU02L- RH
FILE NO.		Q/SSY.QW-001A-0496