

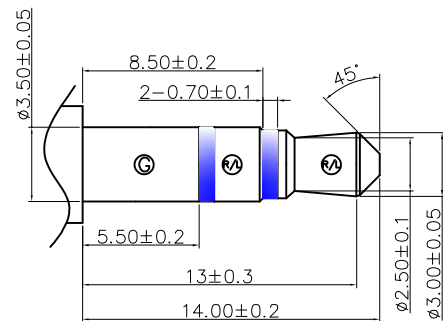
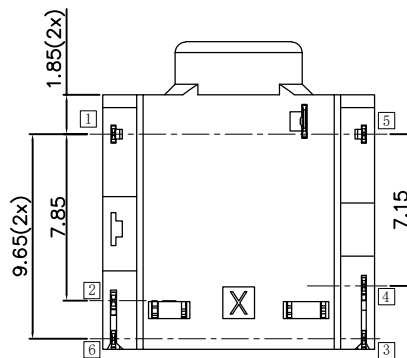
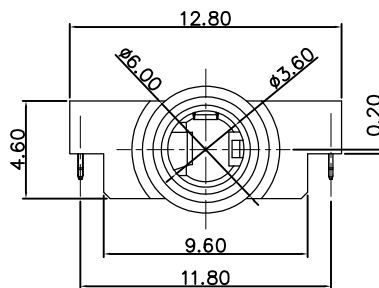




Halgen Free Compliant

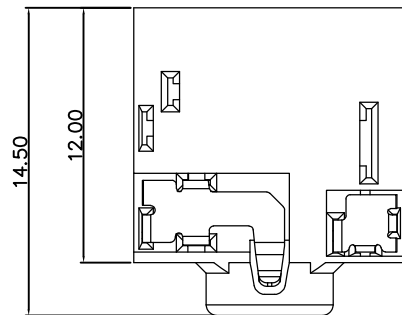




Matching Plug

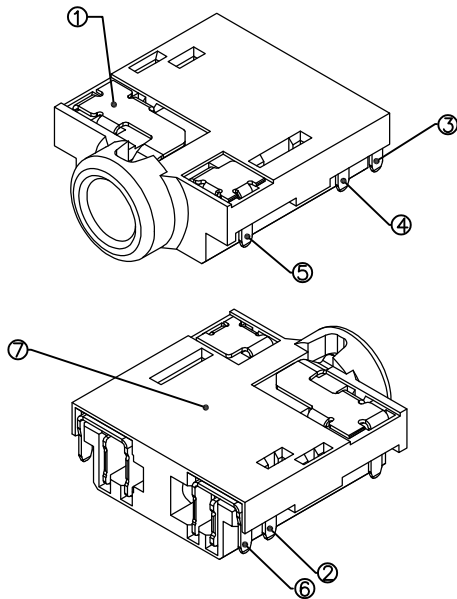

- SPECIFICATION:
- 1.Electrical Characteristics
 - 1-1.Voltage Rating:DC 30V;
 - 1-2: Current Rating:DC 0.3A Max.;
 - 1-3: Contact Resistance: 30mΩ Max.;
 - 1-4.Insulation Resistance: 100MΩ Min. At 500V DC;
 - 1-5.Withstanding Voltage: 500V AC For 1 Minute;
 - 2.Mechanical Characteristics
 - 2-1.Life Test: 5000 Cycles Min,
 - 2-2.Mating/Unmating Force: 3~30N;
 - 3.Salt Spray Test Time: 48 Hours Min.

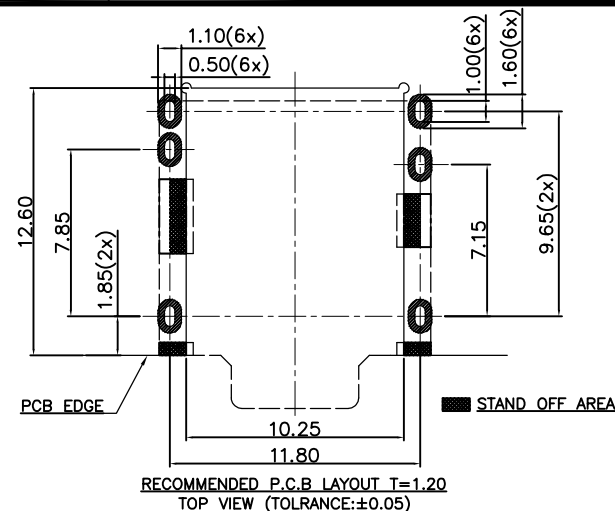

RECOMMENDED P.C.B LAYOUT T=1.20
TOP VIEW (TOLRANCE:±0.05)

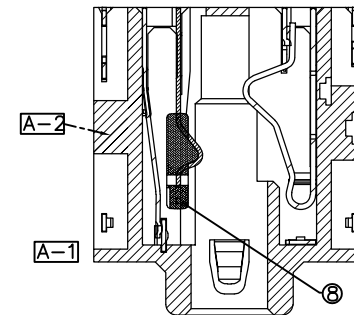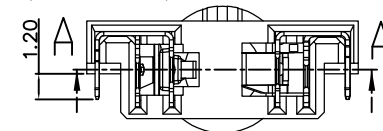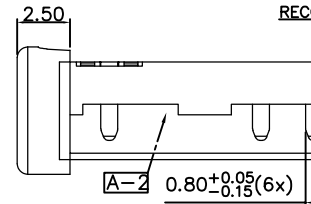

NO.	DESCRIPTION	QTY	MATERIAL	REMARK
⑧	Insulator		HIGHT TEMPERATURE PLASTIC	Black,UL94 V-0
⑦	Housing		HIGHT TEMPERATURE PLASTIC	Black,UL94 V-0
⑥	Shunt terminal	⑥	1 Phosphor Bronze,t0.20	Gold Flash Plated
⑤	Shunt terminal	⑤	1 Phosphor Bronze,t0.20	Gold Flash On The Contact Area,
④	Transfer Spring	④	1 Phosphor Bronze,t0.20	Matte-TIN Plating 80u"Min. on Solder Tail Area
③	Ring Spring	③	1 Phosphor Bronze,t0.20	
②	Tip Spring	②	1 Phosphor Bronze,t0.25	
①	Earth Spring	①	1 Phosphor Bronze,t0.20	Nickel 50u"Min. Under Plating All Over

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	SCALE:	1:1	UNIT:mm	A4	SHEET: 1 of 1	FILE NO.
	A-2	17' /03/08	A-2:减少两槽位深度,外观会随之修改	Andy	李海鸥	10<L≤20 ±0.3	DESIGN	Andy	2017/03/08			
	A-1	14' /03/17	A-1:设计变更MOLDING塑胶结构及锡脚公差;	喻荣华	余军	5<L≤10 ±0.25	CHECK					
	A-0	13' /05/05	NEW	喻荣华	余军	L≤5 ±0.20	APPROVAL					

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TITLE: ø3.50mm Phone Jack(6PIN,CL=0.20mm)
MODEL NO. XB-PJ-D3229A-ABK7AM02L-RH
FILE NO. /