

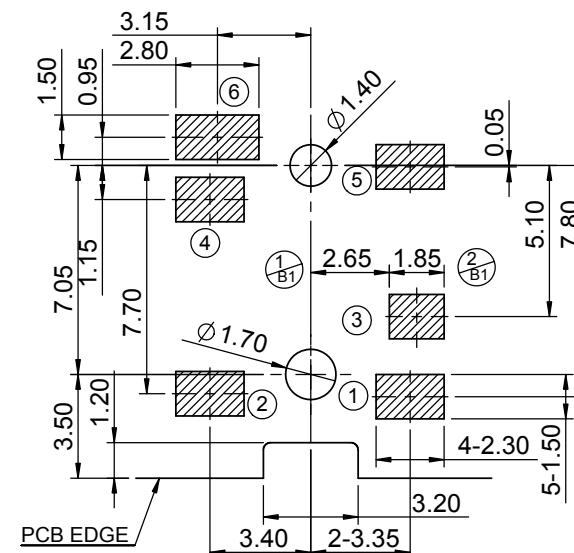
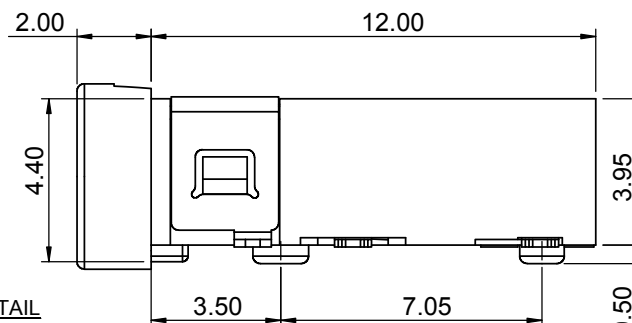
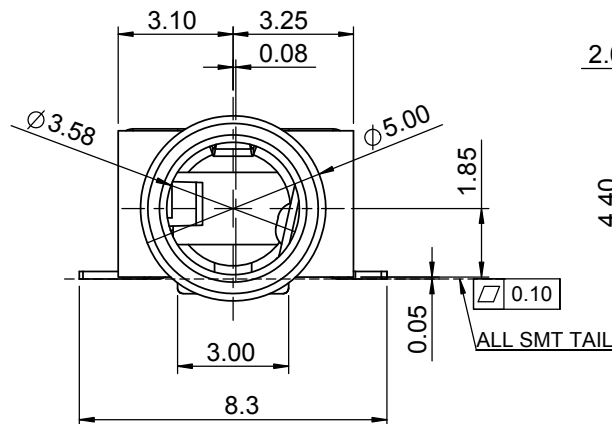
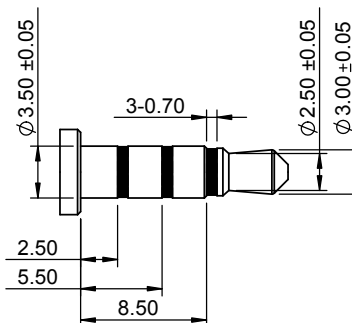


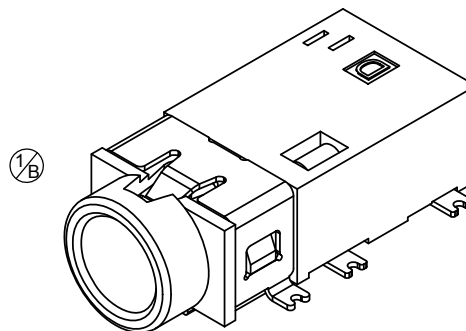


RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE ± 0.05)

NOTES:

1. CONTACT CURRENT RATING: 12V 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES:
29.4N (3.00Kgf) MAX.;
7. CONNECTOR UNMATING FORCES:
2.94N(0.30Kgf) MIN.;

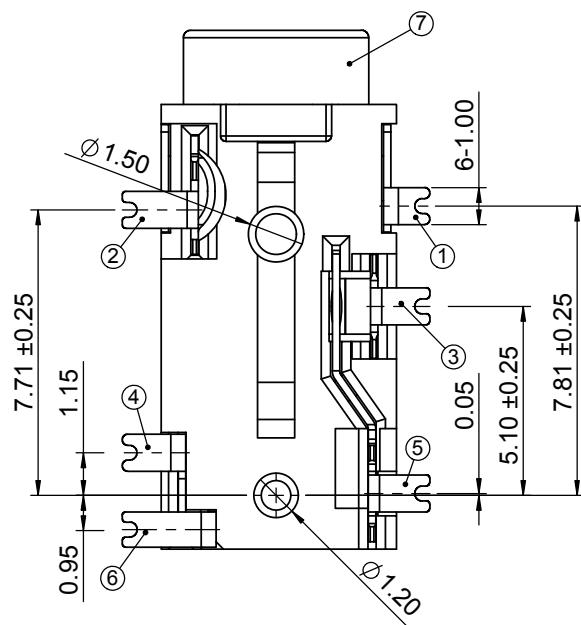

Ø 3.50mm 4 POLE PLUG
DETAIL DRAWING(2:1)



SCHEMATIC

7	HOUSING	HIGH TEMP	BLACK	
6	TERMINAL 6	COPPER ALLOY		Au PLATED
5	TERMINAL 5	COPPER ALLOY		Au PLATED
4	TERMINAL 4	COPPER ALLOY		Au PLATED
3	TERMINAL 3	COPPER ALLOY		Au PLATED
2	TERMINAL 2	COPPER ALLOY		Au PLATED
1	TERMINAL 1	COPPER ALLOY		Au PLATED
NO.	DESCRIPTION	MAT,L	COLOR	REMARK

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

CUSTOMER: TITLE: Ø 3.50 mm PHONE JACK CONNECTOR
COPY:

PART NO.	J303-B06G1-BZL2(速记码:J303-B)
PRODUCT SPEC.	JH-RD-W06
FILE NAME.	XB-J303-B06G1-BZL2-C
SCALE	5:1
UNIT:mm	A4
SHEET: 1 of 1	

JH2014-016	B1	03/04/14	变更PCB板3#脚PAD尺寸	韦庆贡 曾 敏	Angle $\pm 2^\circ$	DESIGN	韦庆贡	03/04/14
JH2012-050	B	11/19/12	B1:1号脚端子设变结构	梁碧华 罗志兵	X ± 0.35	CHECK	徐堂建	03/04/14
	A	07/09/12	新版发行		.X ± 0.25	APPRO.	曾 敏	03/04/14
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		