

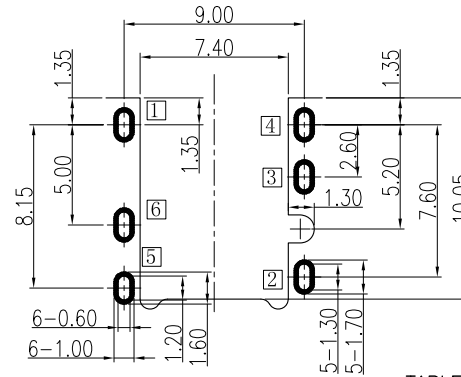
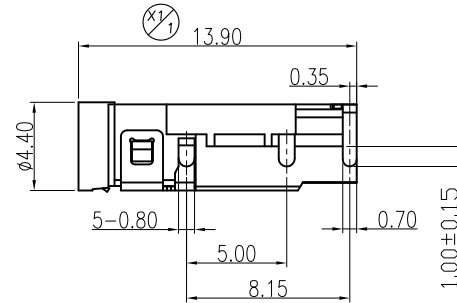


RoHS Compliant

Halogen Free

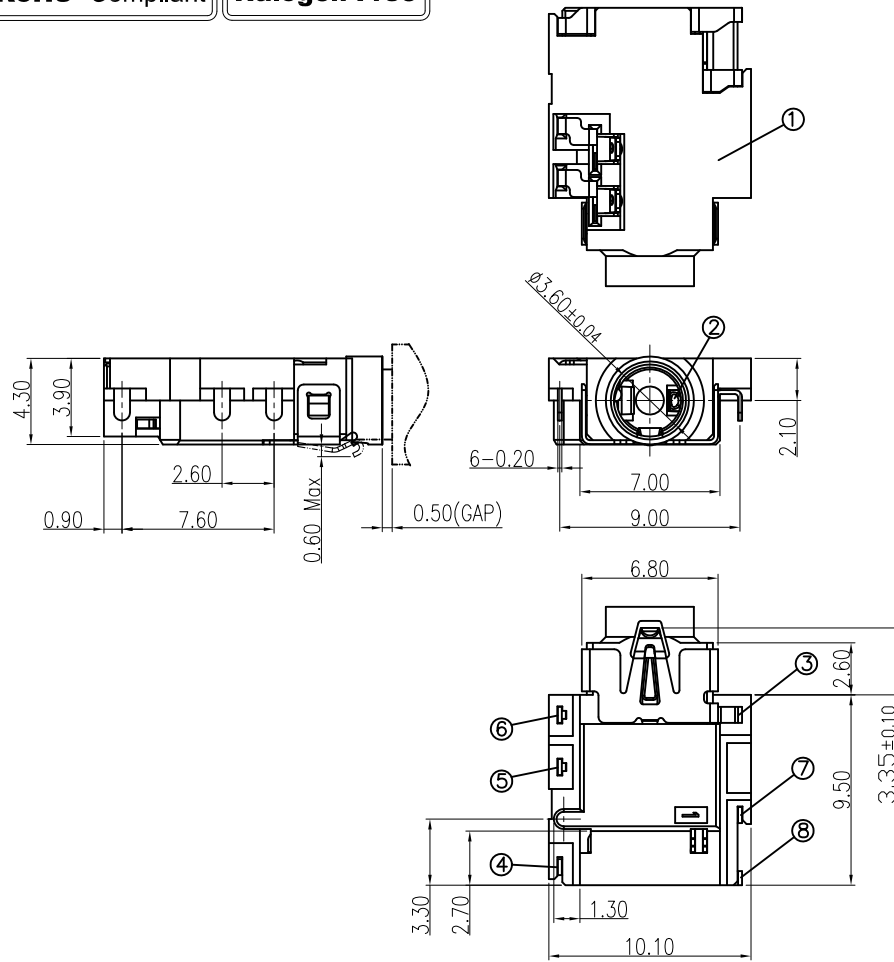

3D VIEW

NOTES:

1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
 - 3.1. VOLTAGE RATING: 12 VAC RMS;
 - 3.2. CURRENT RATING: 1.0 AMP;
 - 3.3. CONTACT RESISTANCE: 50mΩ Max.(Initial), 100mΩ Max.(After Life test);
 - 3.4. INSULATION RESISTANCE: 100 MΩ Min., 500VDC.(Initial), 50 MΩ Min., 500VDC.(After Humidity test);
 - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
 - 4.1. MATING FORCE: 0.5~2.2Kgf.(Initial); 0.4~2.2Kgf.(After Life test);
 - 4.2. UNMATING FORCE: 0.5~2.0Kgf.(Initial); 0.4~2.0Kgf.(After Life test);
 - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
 - 5.1. SALT SPRAY: 48H.
 - 5.2. OPERATION: -30°C~+80°C.

RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE:±0.05)

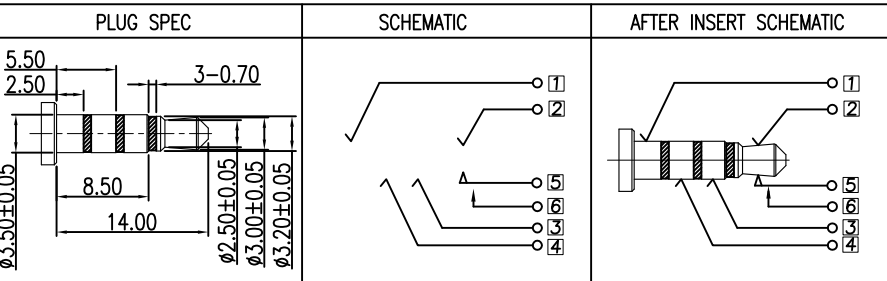


TABLE 1:

⑧	Contact_5	⑤	1	Phosphor bronze	Au 1u"Min	T=0.20mm
⑦	Contact_6	⑥	1	Phosphor bronze	Au 1u"Min	T=0.20mm
⑥	Contact_4	④	1	Phosphor bronze	Au 1u"Min	T=0.20mm
⑤	Contact_3	③	1	Phosphor bronze	Au 1u"Min	T=0.20mm
④	Contact_2	②	1	Phosphor bronze	Au 1u"Min	T=0.20mm
③	Contact_1	①	1	Phosphor bronze	Au 1u"Min	T=0.20mm
②	Separator		1	HIGH TEMP. PLASTIC	Black	
①	Housing		1	HIGH TEMP. PLASTIC	Black	
NO.	PART NAME	QTY		MATERIAL	DESCRIPTION	REMARK

UNLESS OTHERWISE,
GENERAL TOLERANCE:

X.xxx ±0.10
X.xx ±0.20
X.x ±0.30
X. ±0.38

ANGULAR:

X.xx ±1°
X.x ±3°
X. ±5°



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TITLE:
Ø3.5mm Phone Jack CONN.

P/N: XB-J430R06J17ZL2

MODEL: J430-7

DRAW NO.:

THIRD ANGLE PROJECTION



UNIT:

mm

SCALE:

1:1

SIZE:

A4

SHEET:

1/1

DESIGN	Freeman	2017.03.29
CHECK	郑小伟	2017.03.29
APPROVAL	殷芳祥	2017.03.29

JH2017-113	X1	Change Length	2017.07.22	Freeman
N/A	X	NEW DRAWING	2017.03.29	Freeman
ECN NO.	REV.	DESCRIPTION	DATE	CHANGE