



REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Lucky	2018.06.11

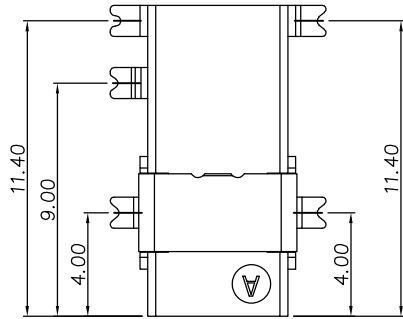

SPECIFICATIONS:







1. ELECTRICAL CHARACTERISTICS:

- 1-1. RATING: 24V 1A
- 1-2. CONTACT RESISTANCE: 50mΩ MAX.(INITIAL)
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
- 1-4. INSULATION RESISTANCE: 100M MIN. MEASURED BY 500V DC

2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION FORCE : 0.3~3.0 KGF
- 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF

3. LIFE TEST: 5,000 CYCLES MIN.

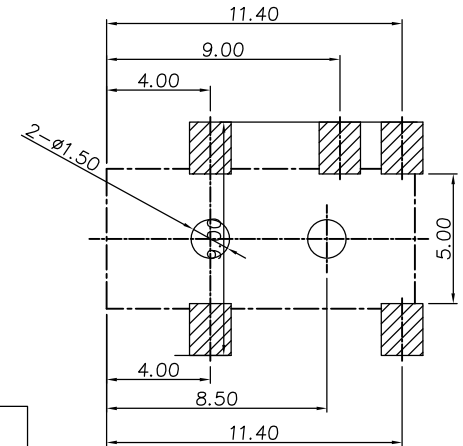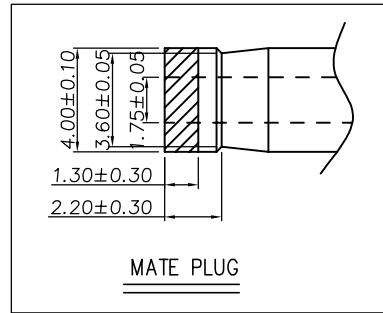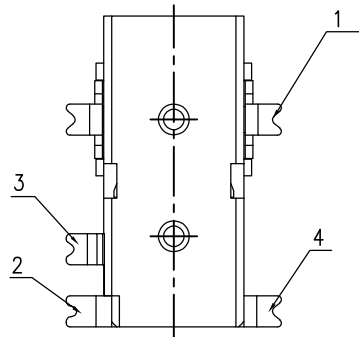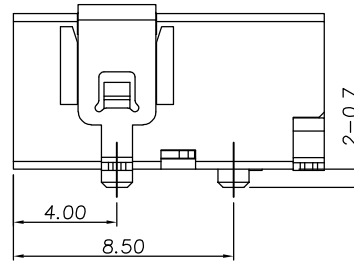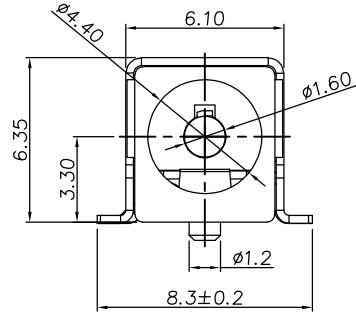

ITEM	NAME	Q'TY	DESCRIPTION	NOTE
5	HOUSING	1	HIGHT TEMPERATURE PLASTIC	
4	CONTACT PIN	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL; THE WHOLE MATTE TIN PLATING.	T=0.30mm
3	TIP SPRING	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL;THE WHOLE MATTE TIN PLATING.	T=0.30mm
2	CONCTOR PIN	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL; THE WHOLE SILVER PLATING.	T=0.30mm
1	POSITIONING PIN	1	COPPER ALLOY; THE BOTTOM OF THE NICKEL; THE WHOLE TIN PLATING.	T=0.30mm

UNLESS OTHERWISE SPECIFIED TOLERANCES				东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DWG NO.	PART NAME:		
DIM	TOL	DIM	TOL	DESIGN:	DC POWER JACK		
X.	±0.50	X.	±2°	CHECK:	PART NO.		
X.X	±0.30	X.X	±1°	APPROVED	XB-DCJR0027-F04A5BR-A		
X.XX	±0.20	X.XX	—		REV.	UNIT:	SHEET:
X.XXX	±0.10	X.XXX	—		A	mm	1/1