




REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Lucky	11 /10 /17"






3D VIEW



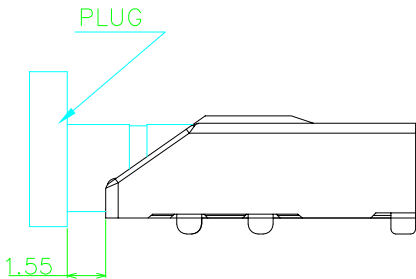


PLUG MATE DRAWING

- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 50 mΩ MAX.;
- INSULATION RESISTANCE: 100MΩ MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 30N MAX.;
- CONNECTOR UNMATING FORCES: 3N MIN.;

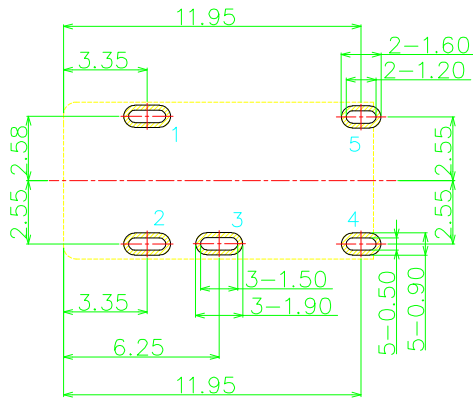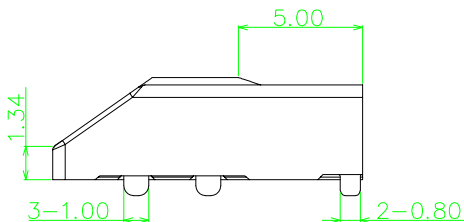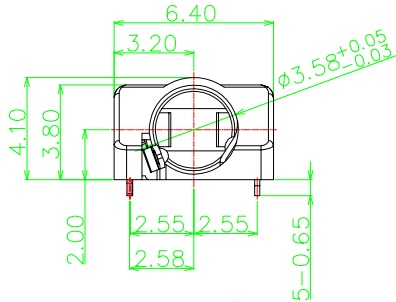

P.C.B LAYOUT
TOP VIEW

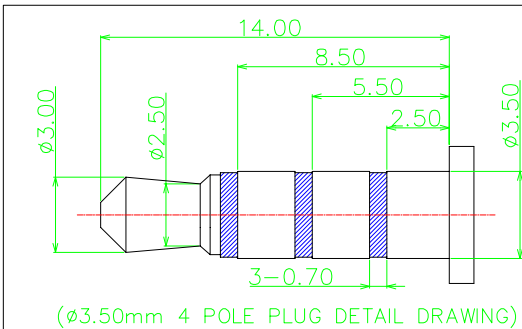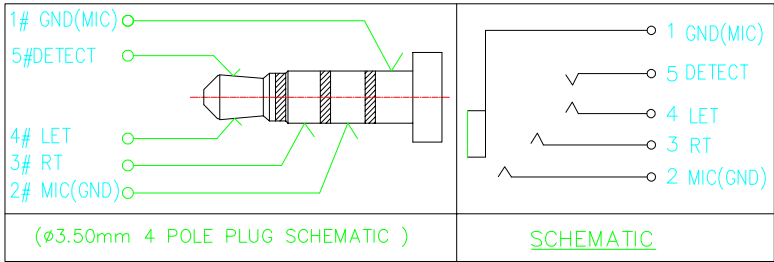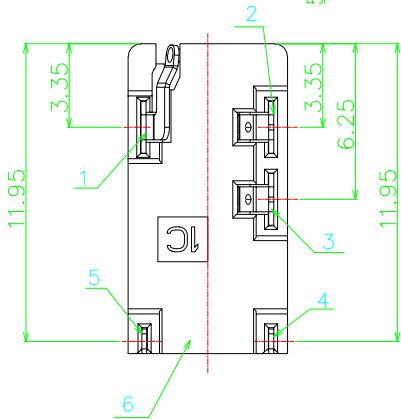

6	HOUSING	1	
5	TERMINAL 5#	1	
4	TERMINAL 4#	1	
3	TERMINAL 3#	1	
2	TERMINAL 2#	1	
1	TERMINAL 1#	1	
ITEM	NAME	Q'TY	

These drawings and specifications are the property of Dongguan Xibang Electronics Co., Ltd. and should not be copied. Without the prior written consent of Dongguan Xibang Electronics Co., Ltd., it shall not be copied or used in any way

T=0.20mm
T=0.20mm
T=0.20mm
T=0.20mm
T=0.20mm
NOTE

UNLESS OTHERWISE SPECIFIED TOLERANCES			
DECIMALS:		ANGLES:	
DIM	TOL	DIM	TOL
x.	±0.50	x.	±2°
x.x	±0.30	x.x	±1°
x.xx	±0.20	x.xx	—
x.xxx	±0.10	x.xxx	—

DWG NO.		PART NAME:	
DESIGN:		PHONE JACK	
CHECK:		PART NO.	
APPROVED		PJ35A016-F05J1BR-A	
Lucky 2018.03.22		REV. A	UNIT: mm
		SHEET: 1/1	

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.