





1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

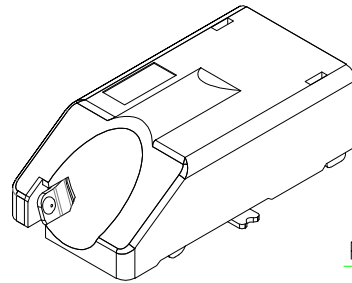




3D VIEW

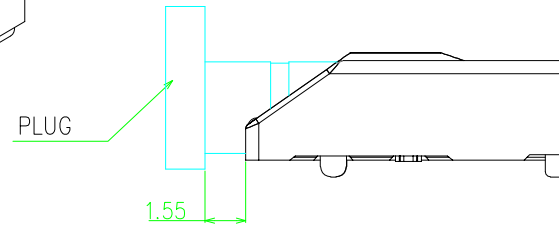


PLUG MATE DRAWING

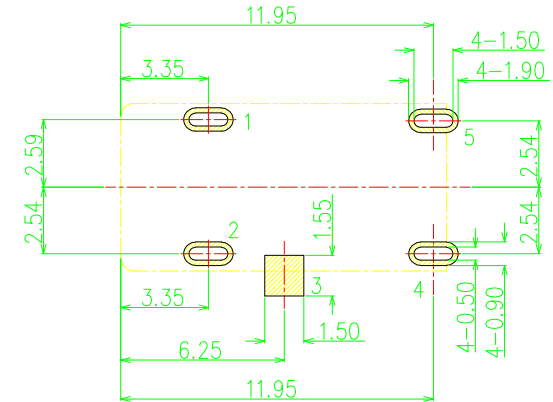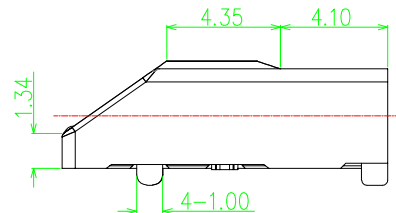

P.C.B LAYOUT
TOP VIEW

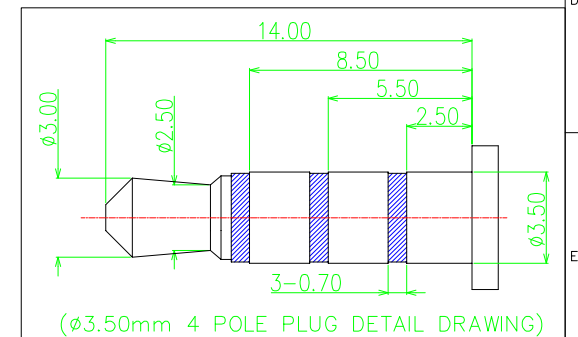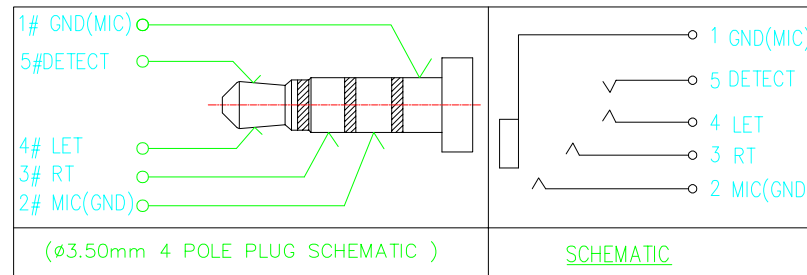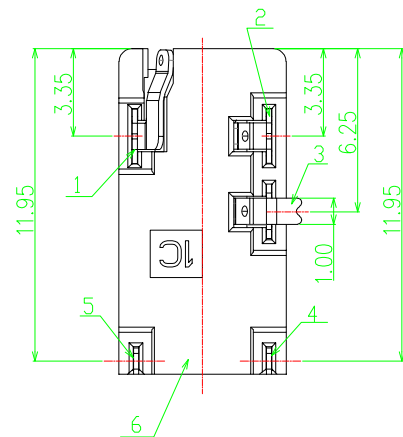

6	HOUSING		HIGHT TEMPERATURE PLASTIC COLOR BLACK	
5	TERMINAL 5#	1	STAINLESS STEEL;NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA;GOLD PLATING ON CONTACT AREA	T=0.20
4	TERMINAL 4#	1		T=0.20
3	TERMINAL 3#	1		T=0.20
2	TERMINAL 2#	1	COPPER ALLOY; NICKEL UNDER PLATING OVERALL,GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA	T=0.20
1	TERMINAL 1#	1		T=0.20
ITEM	NAME	Q'TY	DESCRIPTION	NOTE

UNLESS OTHERWISE SPECIFIED TOLERANCES				 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.					
DECIMALS:		ANGLES:		DWG NO.	PART NAME: PHONE JACK				
DIM	TOL	DIM	TOL	DESIGN:				Kai	
X.X	±0.35	X.	±2°	CHECK:	2018.11.12	PART NO.			
X.X	±0.30	X.X	±1°	APPROVED	Lucky	XB-PJ35A033-F05J1BR-A			
X.XX	±0.20	X.XX	——			REV.	UNIT:	SHEET:	
X.XXX	±0.10	X.XXX	——	2018.11.12		A	mm	1/1	