



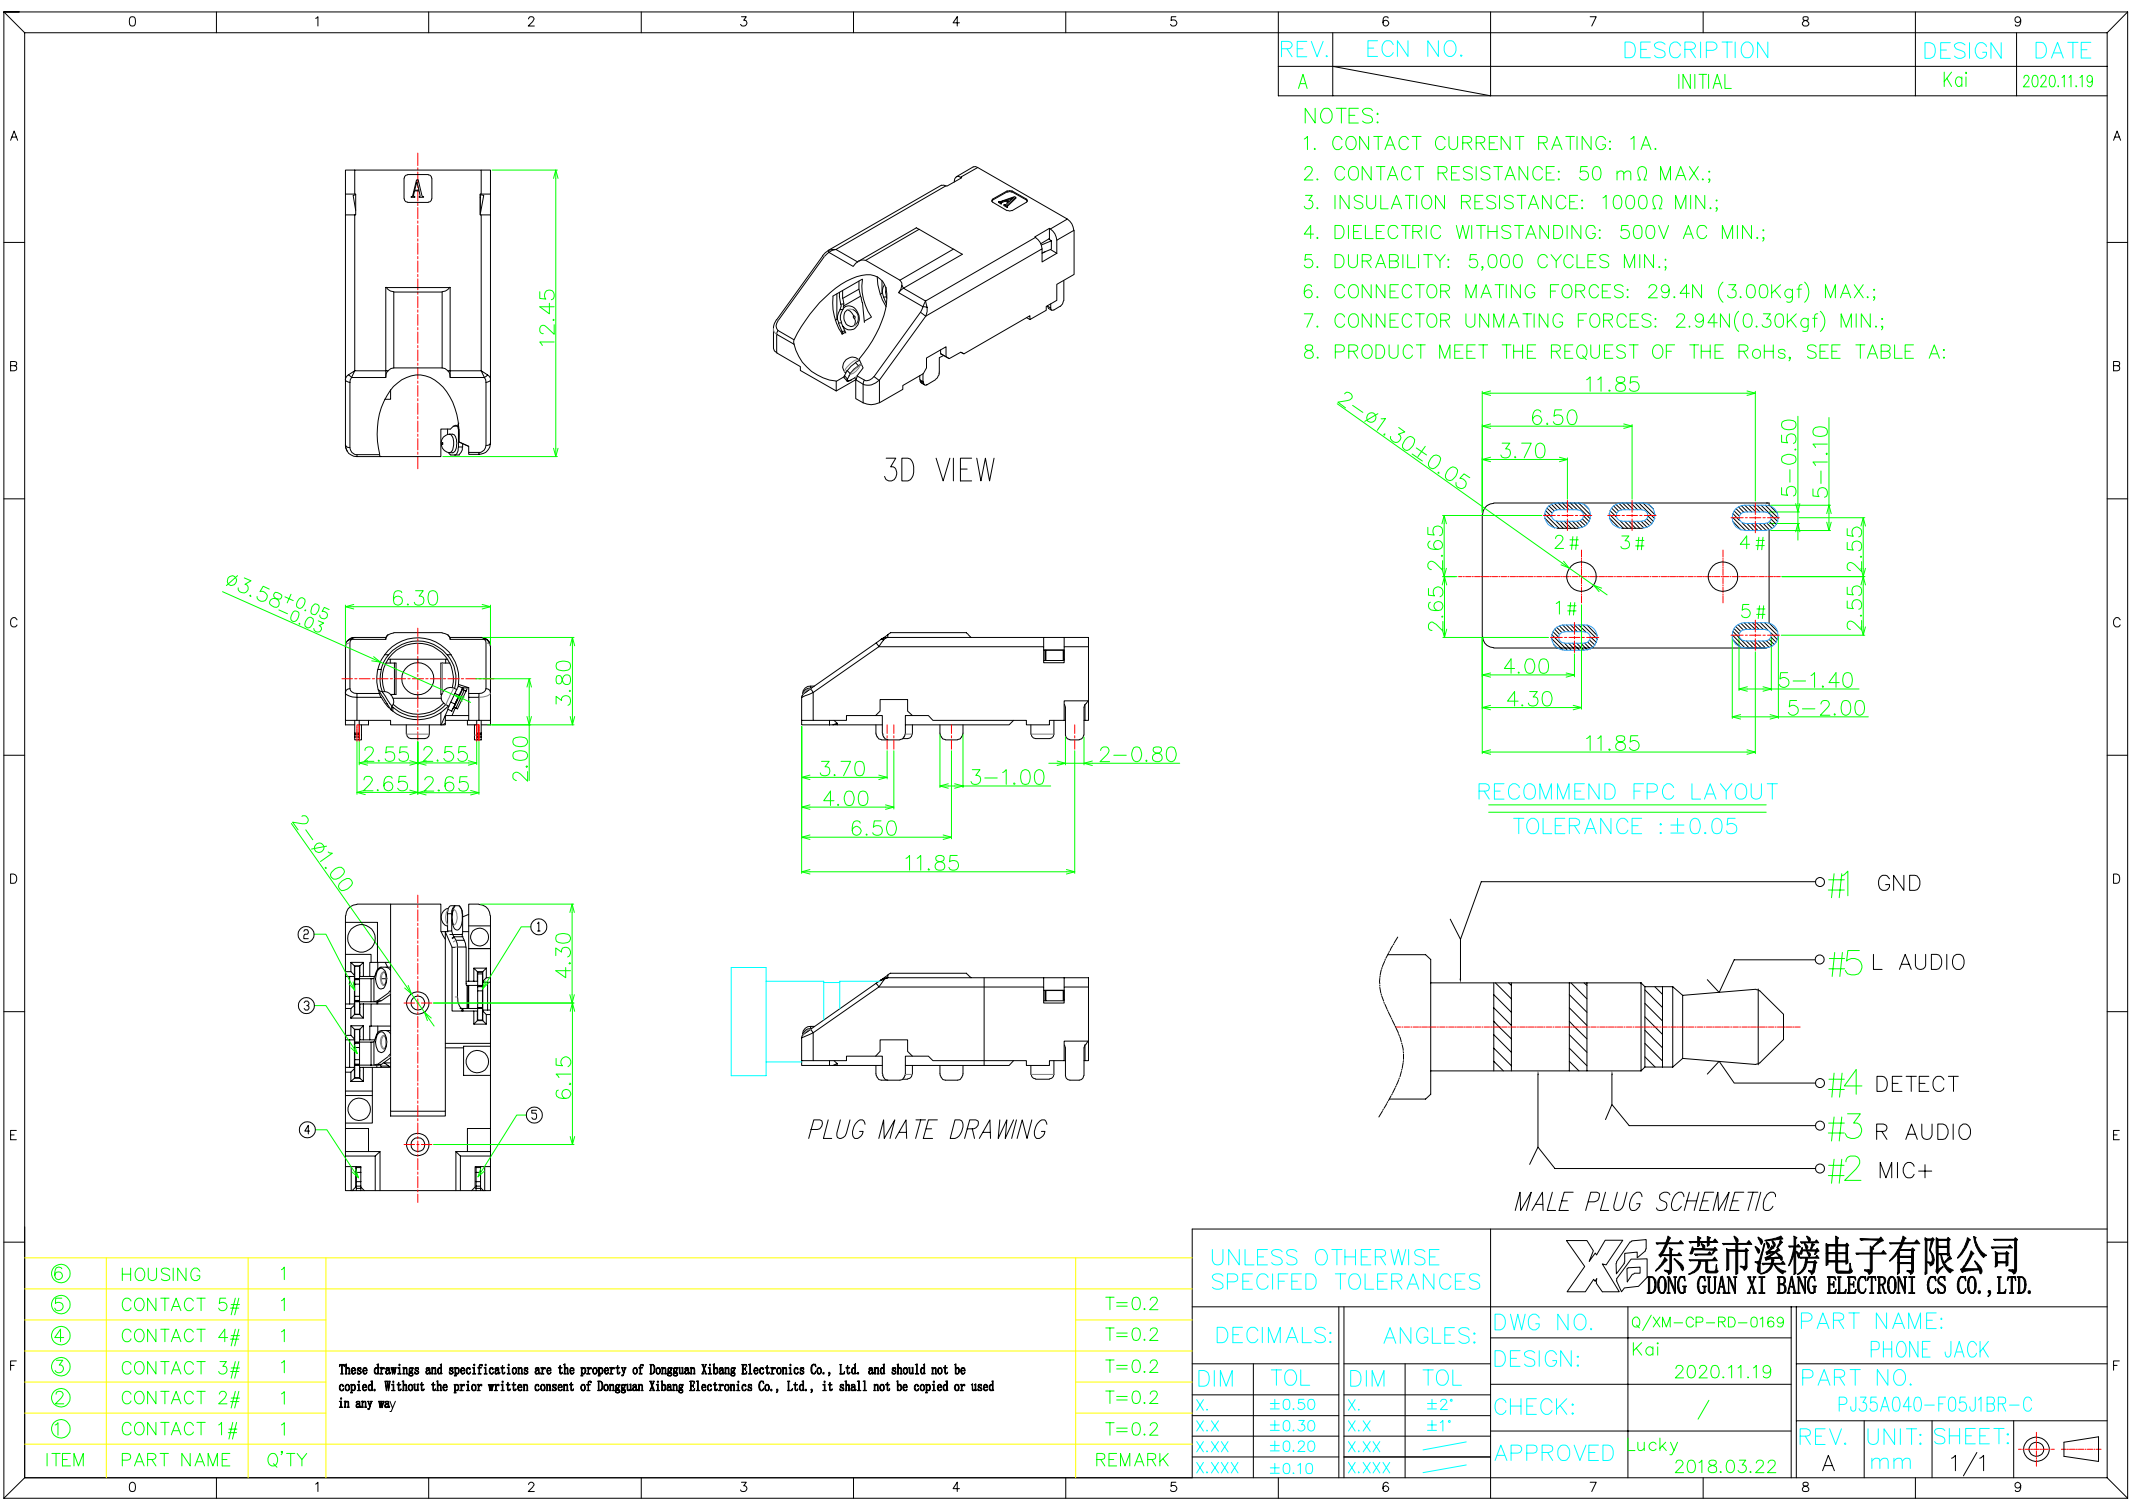

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
A		INITIAL	Kai	2020.11.19

- NOTES:
- CONTACT CURRENT RATING: 1A.
 - CONTACT RESISTANCE: 50 mΩ MAX.;
 - INSULATION RESISTANCE: 1000Ω MIN.;
 - DIELECTRIC WITHSTANDING: 500V AC MIN.;
 - DURABILITY: 5,000 CYCLES MIN.;
 - CONNECTOR MATING FORCES: 29.4N (3.00Kgf) MAX.;
 - CONNECTOR UNMATING FORCES: 2.94N(0.30Kgf) MIN.;
 - PRODUCT MEET THE REQUEST OF THE RoHs, SEE TABLE A:

RECOMMEND FPC LAYOUT
TOLERANCE :±0.05

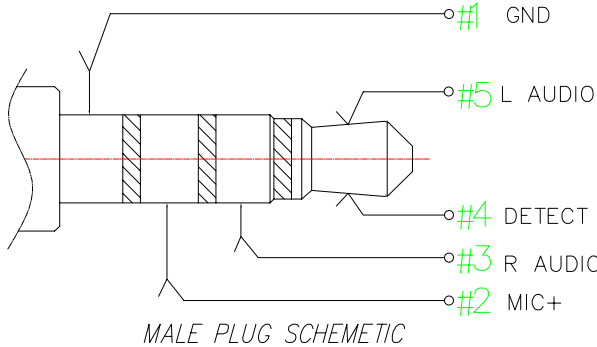

⑥	HOUSING	1	These drawings and specifications are the property of Dongguan Xibang Electronics Co., Ltd. and should not be copied. Without the prior written consent of Dongguan Xibang Electronics Co., Ltd., it shall not be copied or used in any way	
⑤	CONTACT 5#	1		T=0.2
④	CONTACT 4#	1		T=0.2
③	CONTACT 3#	1		T=0.2
②	CONTACT 2#	1		T=0.2
①	CONTACT 1#	1		T=0.2
ITEM	PART NAME	Q'TY		REMARK

UNLESS OTHERWISE SPECIFIED TOLERANCES		XIB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
DECIMALS:		DWG NO.	Q/XM-CP-RD-0169
ANGLES:		DESIGN:	Kai
DIM		CHECK:	/
TOL		APPROVED	Lucky
X. ±0.50			2018.03.22
X.X ±0.30			
X.XX ±0.20			
X.XXX ±0.10			
		PART NAME:	PHONE JACK
		PART NO.	PJ35A040-F05J1BR-C
		REV.	A
		UNIT:	mm
		SHEET:	1/1