


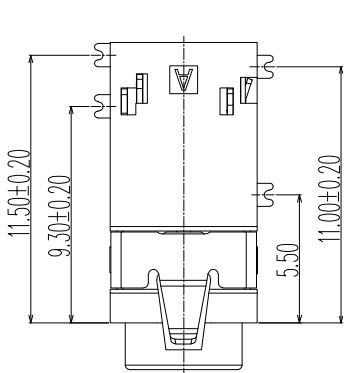
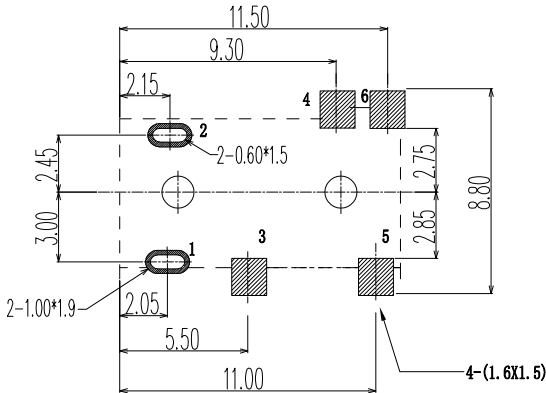



REV.	ECN. NO.	DESCRIPTION	ENG	DATE
A		INITIAL	Lucky	11 /09 /17'




1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 30 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 29.4N MAX.;
7. CONNECTOR UNMATING FORCES: 2.94N MIN.;

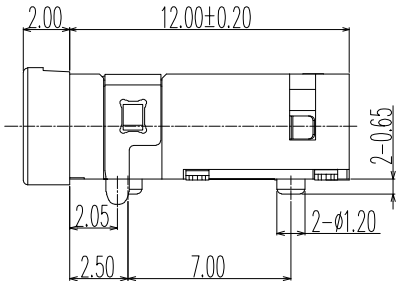

3D VIEW

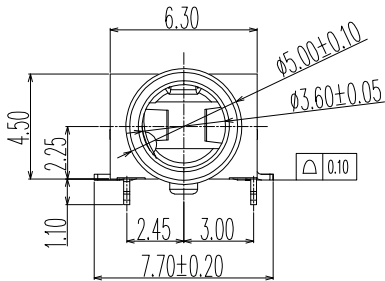

P.C.B LAYOUT
TOP VIEW

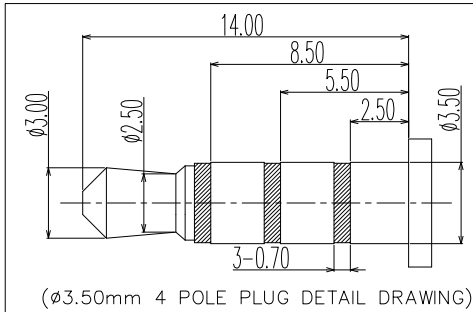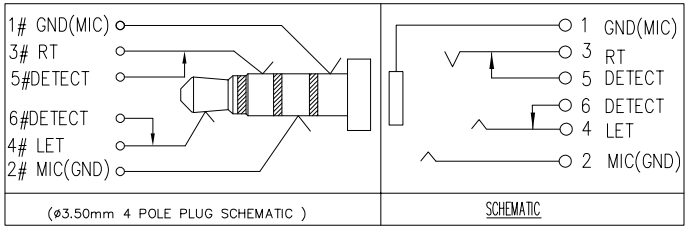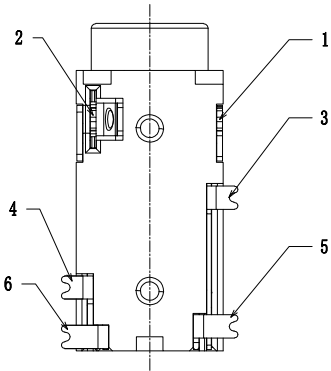

(Ø3.50mm 4 POLE PLUG DETAIL DRAWING)

7	HOUSING	1	PA9T COLOR BLACK
6	TERMINAL 6#	1	BRASS; THE BOTTOM OF THE NICKEL; GOLD PLATING ON SOLDER AREA ;
5	TERMINAL 5#	1	
4	TERMINAL 4#	1	
3	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL; GOLD PLATING ON SOLDER AREA ; GOLD PLATING ON CONTACT AREA
2	TERMINAL 2#	1	
1	TERMINAL 1#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.
ITEM	NAME	Q'TY	DESCRIPTION

MEASURE POINT: QUADRANT POINT TANGENCY POINT INTERSECTION POINT	QP TP IP
UNLESS OTHERWISE SPECIFIED, TOLERANCE:	
X.	±0.25
X.x	±0.20
X.xx	±0.15
X.xxx	±0.10
ANGULAR	±3°
	NOTE

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DESIGN:	DATE:	TITLE:
CHECKED:	DATE:	Ø3.5mm PHONE JACK H=4.5 mm
APPROVED:	DATE:	SMT TYPE CONNECTOR
PART NO. XB-PJ35A051-F06G1BR-D	REV.: A	SCALE: 1:1
DRAWING NO.	SIZE: A4	SHEET: 1/1