


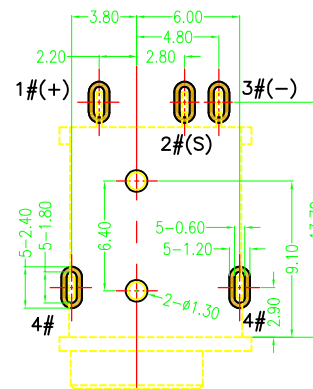
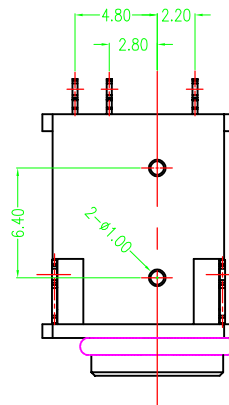





RoHS
Compliant

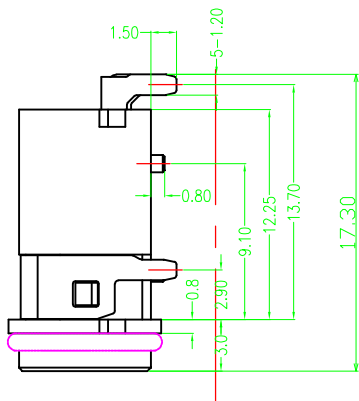

- Notes:
- 1.Current Rating: 24V & 5A Max.
 - 2.Contact Resistance: 50m Ohms Max.(initial)
 - 3.Insulation Resistance: 100M Ohms Min./500V DC
 - 4.Dielectric Withstanding Voltage: 500V AC/1Minute
 - 5.Mating Force: 35N Max, Withdrawal Force: 3N Min.
 - 6.Durability: 5,000 Cycles
 - 7.Operating Temperature:-25°C to+85°C





RECOMMEND PCB LAYOUT
TOLERANCE:±0.05

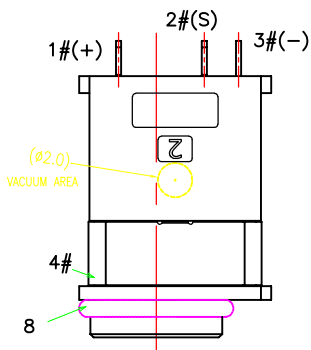

Not to install the waterproof ring shipment

WHITE WATERPROOF RING

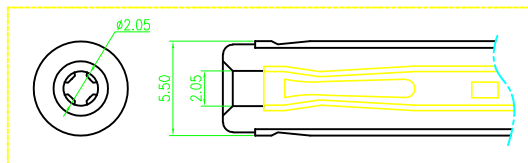

8	WATERPROOF RING	1	SILICONE; WHITE
7	GLUE	1	EPOXY; BLACK
6	BACK COVER	1	HIGH TEMPERATURE; BLACK
5	HOUSING	1	HIGH TEMPERATURE; BLACK
4	TERMINAL 4#	1	STAINLESS STEEL; NICKEL PLATING
3	TERMINAL 3#	1	COPPER ALLOY; NICKEL UNDERPLATING OVERALL, Au PLATING ON SOLDER AREA
2	TERMINAL 2#	1	COPPER ALLOY; NICKEL UNDERPLATING OVERALL, Au PLATING ON THE WHOLE
1	CENTER PIN	1	COPPER ALLOY; NICKEL UNDERPLATING OVERALL, Au PLATING ON SOLDER AREA
ITEM	NAME	Q'TY	DESCRIPTION

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NAME	防水DC插座 2.0针	TOLERANCE UNLESS	0.0±0.2	UNIT:	mm
PART NO.	XB-30007-05DBAP-A	OTHERWISE SPECIFIED:	0.00±0.1 0.000±0.05		

DRAWING:	XB	DATE:	2021.06.16	SCALE	5:1
CHECK:	SJ	DATE:	2021.06.16	MATERIAL	*
APPROVAL:		DATE:	2021.06.16	DWG. no.	
DRAWING NO.	XB-30007-05DBAP-A	SHEET			