





RoHS
Compliant

SYMBOL


REVISION

APPROVAL


DATE

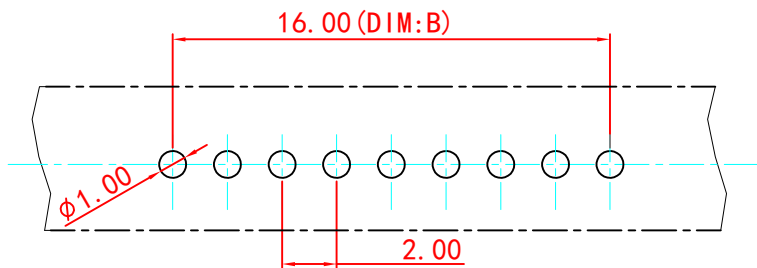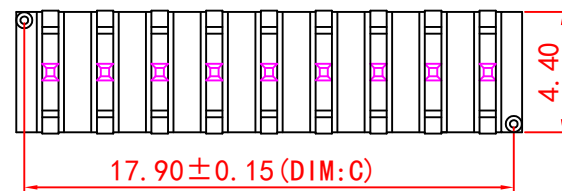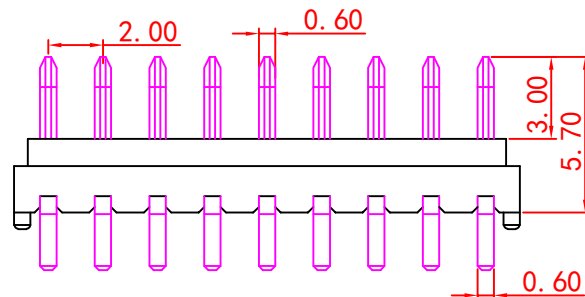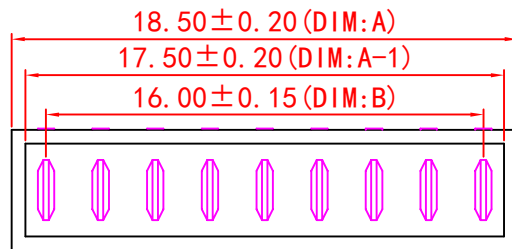

RECOMMENDED P.C.BOARD LAYOUT



3D VIEW



No.of Pins	Dimension		
	DIM.A	DIM.B	DIM.C
02	4.50	2.00	3.90
03	6.50	4.00	5.90
04	8.50	6.00	7.90
05	10.50	8.00	9.90
06	12.50	10.00	11.90
07	14.50	12.00	13.90
08	16.50	14.00	15.90
09	18.50	16.00	17.90
10	20.50	18.00	19.90

Material

Insulator : LCP

Contact : C2680

Contact Plated : Gold over Nickel or Tin
Specification

Current Rating : 3A

Instant Current : 5A

Contact Resistance : 30mΩ

Insulation Resistance : 100MΩ

Dielectric Voltage : 500V

Operating Temperature : -40°~105°

2	HOUSING	LCP	1	GRAY
1	CONTACT TERMINAL	C2680	9	Au PLATED
NO.	PARTS	MATERIAL	QTY.	FINISHING

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		CONNECTOR		DRAWING	DONG.PANG	DWG.No.	
PART NO.		XB-A00M-9P-R1		CHECK	ZENQ.CHEN	REV.	A1
	UNIT:	TOLERANCE	UP TO 5 ABOVE 5~30 ABOVE 30 ANGLE	±0.2 ±0.3 ±0.5 ±3°	ANGLE	APPROVAL	LIANG.WU
	mm	OTHERWISE			0°±3°	SCALE	2:1
				DATE	08-08-2018	PAGE	1 OF 1