


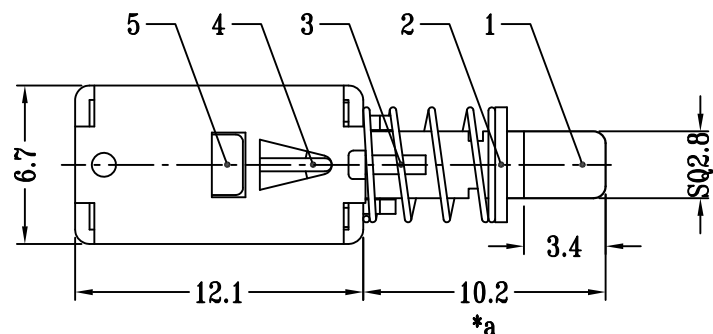
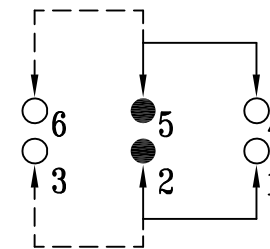


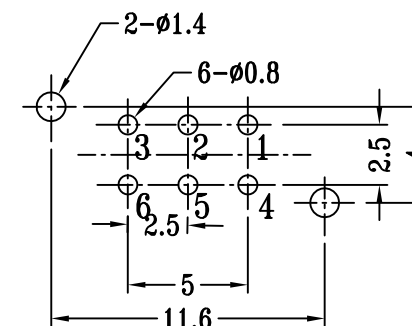

1. LIFE TEST:WITHOUT LOADING 10000cycles at a speed of 15-18cycles
2. CONTACT RESISTANCE:100mΩmax
3. INSULATION RESISTANCE:100MΩmin
4. DIELETRIC STRENGTH:500V AC FOR 1 MIN
5. OPERATING TEMPERATURE:-40°C-+70°C
6. RATING:DC 1.0A 12V
7. FUNCTION:2P2T
8. TIMING:NON-SHORTING
9. OPERATING FORCE:400gf±100gf

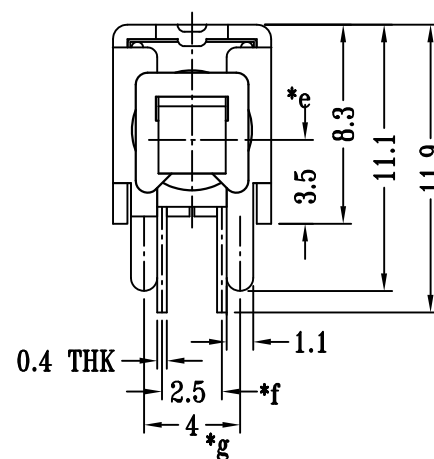

SCHEMATIC (NON-SHORTING)

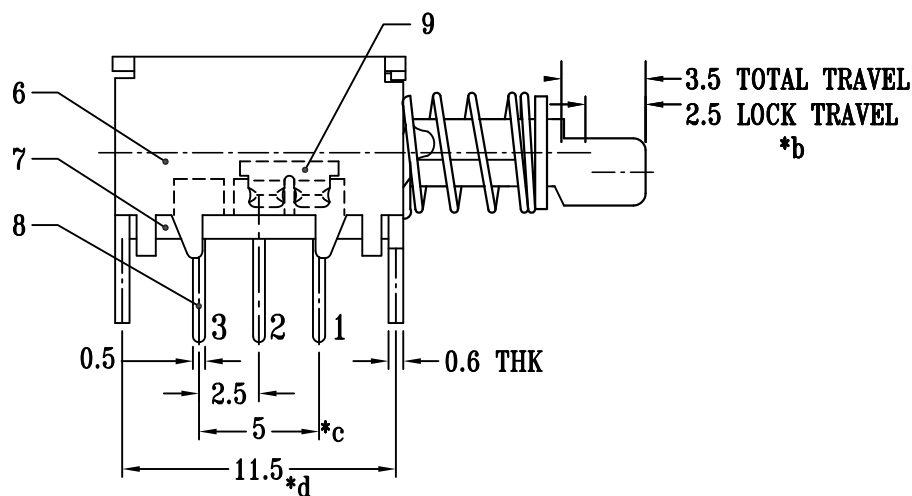

P.C.B LAYOUT BOTTOM VIEW

注：“*”号表示关键尺寸(7个).

9	CONTACT CLIP	PBS C5210R-EH	2	Ag CLAD (0.1um-0.3um)	TOLERANCE UNLESS SPECIFIED						
8	TERMINAL	BRASS STRIP	6	Ag PLATED (0.1um-0.3um)							
7	BASE	PHENOLIC RESIN	1	NATURAL	WITHIN 1.5mm : ±0.1mm	A	2016-11-24	初 版		曾 鹏	
6	FRAME	STEEL STRIP	1	Ni PLATED (Cu:0.2-0.4um;Ni:1.0-1.5um)	OVER 1.5mm : ±0.2mm	ISSUE	DATE	DESCRIPTIONS OF REVISION		APPD.	
5	SPRING PLATE	PBS STRIP	1	NATURAL	TITLE : PUSH SWITCH			UNIT : mm	DRWG NO.: XB-PS-22E051		
4	CAM STICK	PBS WIRE	1	NATURAL	MODEL: XB-PS-22E051			SCALE: 3:1	DWN.	吴开庆	2016-11-24
3	SPRING	STEEL WIRE	1	Ni PLATED (Cu:0.2-0.4um;Ni:1.0-1.5um)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			CHK'D	劳庆先	2016-11-24	
2	BLOCK	STEEL STRIP	1	Ni PLATED (Cu:0.2-0.4um;Ni:1.0-1.5um)				APPD.	曾 鹏	2016-11-24	
1	KNOB	NYLON	1	BLACK							
NO.	PARTS	MATERIALS	Q'TY	FINISH							