


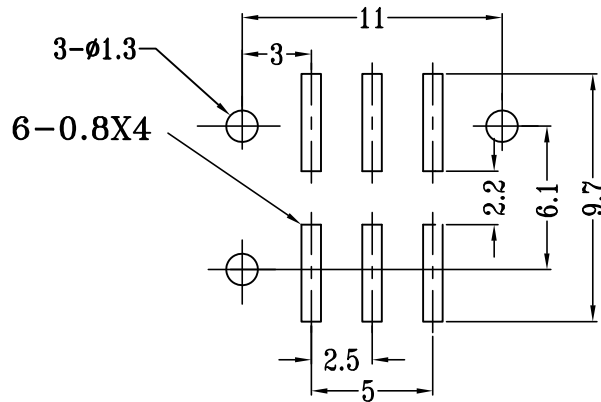
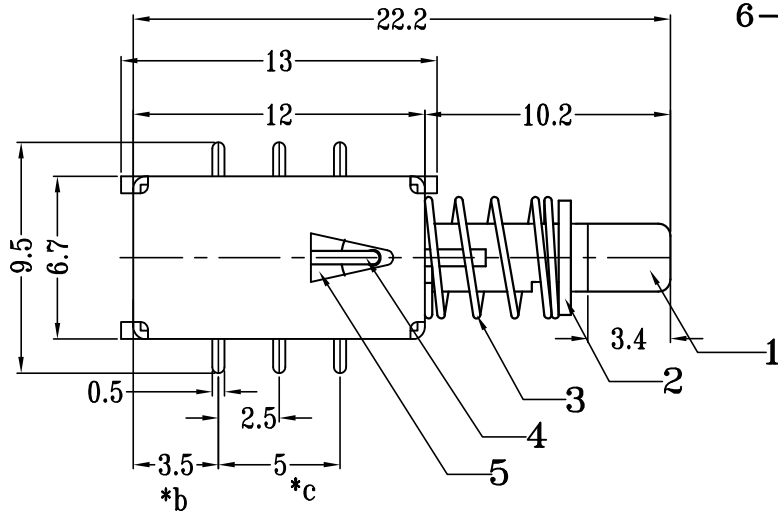




P.C.B LAYOUT
TOP VIEW

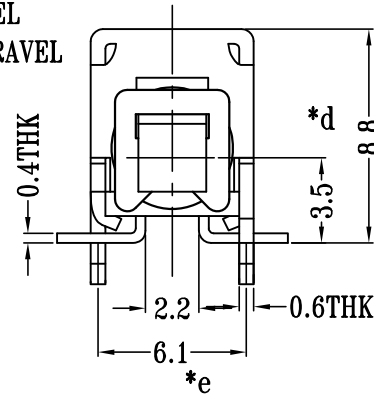

SCHEMATIC (NON-SHORTING)

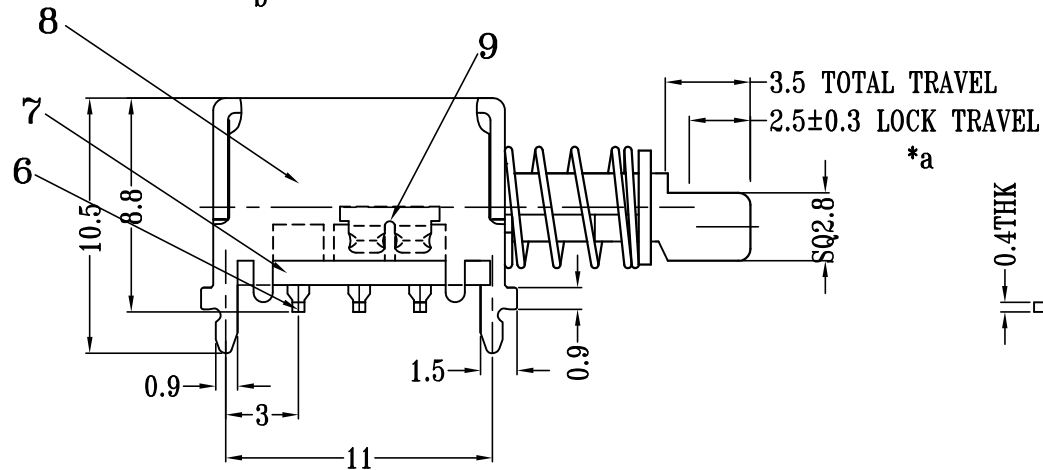

注: "*"表示关键尺寸(5个).

SPECIFICATIONS

1. LIFE TEST:WITHOUT LOADING 10000cycles at a speed of 15-18cycles
2. CONTACT RESISTANCE:50mΩmax
3. INSULATION RESISTANCE:100MΩmin
4. DIELECTRIC STRENGTH:500V AC FOR 1 MIN
5. OPERATING TEMPERATURE:-16°C~+60°C
6. RATING:DC 1.0A 12V
7. FUNCTION:2P2T
8. TIMING:NON-SHORTING
9. OPERATING FORCE:350gf±150gf
- 10.LOCK TRAVEL:2.5±0.3

9	CONTACT CLIP	PBS C5210R-EH	2	Ag PLATED
8	FRAME	STEEL STRIP	1	Ni PLATED
7	BASE	PHENOLIC RESIN	1	NATURAL
6	TERMINAL	BRASS STRIP	6	Ag PLATED
5	SPRING PLATE	PBS STRIP	1	Ni PLATED
4	CAM STICK	PBS WIRE	1	Ni PLATED
3	SPRING	STEEL WIRE	1	Ni PLATED
2	BLOCK	STEEL STRIP	1	Ni PLATED
1	KNOB	LCP	1	BLACK
NO.	PARTS	MATERIALS	Q'TY	FINISHING

TOLERANCE UNLESS SPECIFIED					
WITHIN 1.5mm : ±0.1mm		A	2016-10-19	初版	曾 鹏
OVER 1.5mm : ±0.2mm		ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
TITLE : PUSH SWITCH			UNIT : mm	DRWG NO.: XB-PS-22E081	
MODEL: XB-PS-22E081			SCALE: 3:1	DWN.	张 俊
 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.			APPD.	CHK'D	黄锦效
					2016-10-19
					2016-10-19