




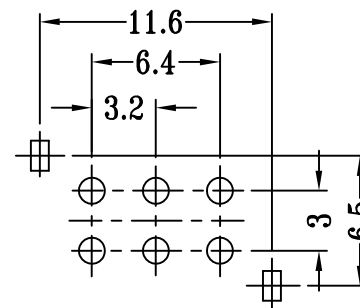

P.C.B LAYOUT
BOTTOM VIEW



SCHEMATIC (NON-SHORTING)

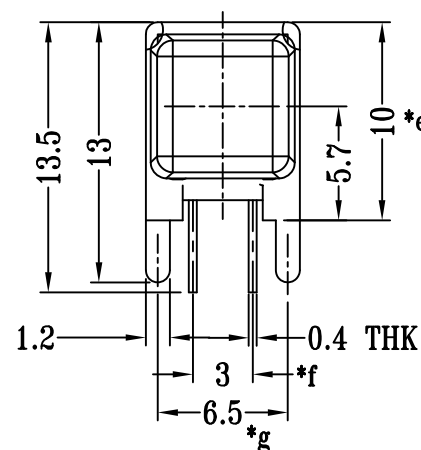

SPECIFICATIONS

1. LIFE TEST:WITHOUT LOADING 10000cycles
at a speed of 15-18cycles
2. CONTACT RESISTANCE:100mΩmax
3. INSULATION RESISTANCE:100MΩmin
4. DIELETRIC STRENGTH:500V AC FOR 1 MIN
5. OPERATING TEMPERATURE:-16°C-+60°C
6. RATING:DC 1.0A 12V
7. FUNCTION:2P2T
8. TIMING:NON-SHORTING
9. OPERATING FORCE:450gf±100gf.

10	CONTACT CLIP	PBS STRIP	2	Ag PLATED
9	CAM STICK	PBS WIRE	1	NATURAL
8	CPA	NYLON+F.G	1	BLACK
7	TERMINAL	BRASS STRIP	6	Ag PLATED
6	BASE	PHENOLIC RESIN	1	NATURAL
5	FRAME	STEEL STRIP	1	Ni PLATED
4	SPRING PLATE	PBS STRIP	1	NATURAL
3	SPRING	STEEL WIRE	1	Ni PLATED
2	BLOCK	STEEL STRIP	1	Ni PLATED
1	KNOB	NYLON+F.G	1	BLACK
NO.	PARTS	MATERIALS	Q'TY	FINISH

注: "*"表示关键尺寸(7个)

TOLERANCE UNLESS SPECIFIED					
WITHIN 1.5mm : $\pm 0.1\text{mm}$		A		初 版	曾鹏
OVER 1.5mm : $\pm 0.2\text{mm}$		ISSUE	DATE	DESCRIPTIONS OF REVISION	APPD.
TITLE : PUSH SWITCH			UNIT : mm	DRWG NO.: XB-PS-22F17	
MODEL: XB-PS-22F17			SCALE: 5:2	DWN.	张 俊
 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			CHK'D	黄锦效	2016-12-06
			APPD.	曾 鹏	2016-12-06