
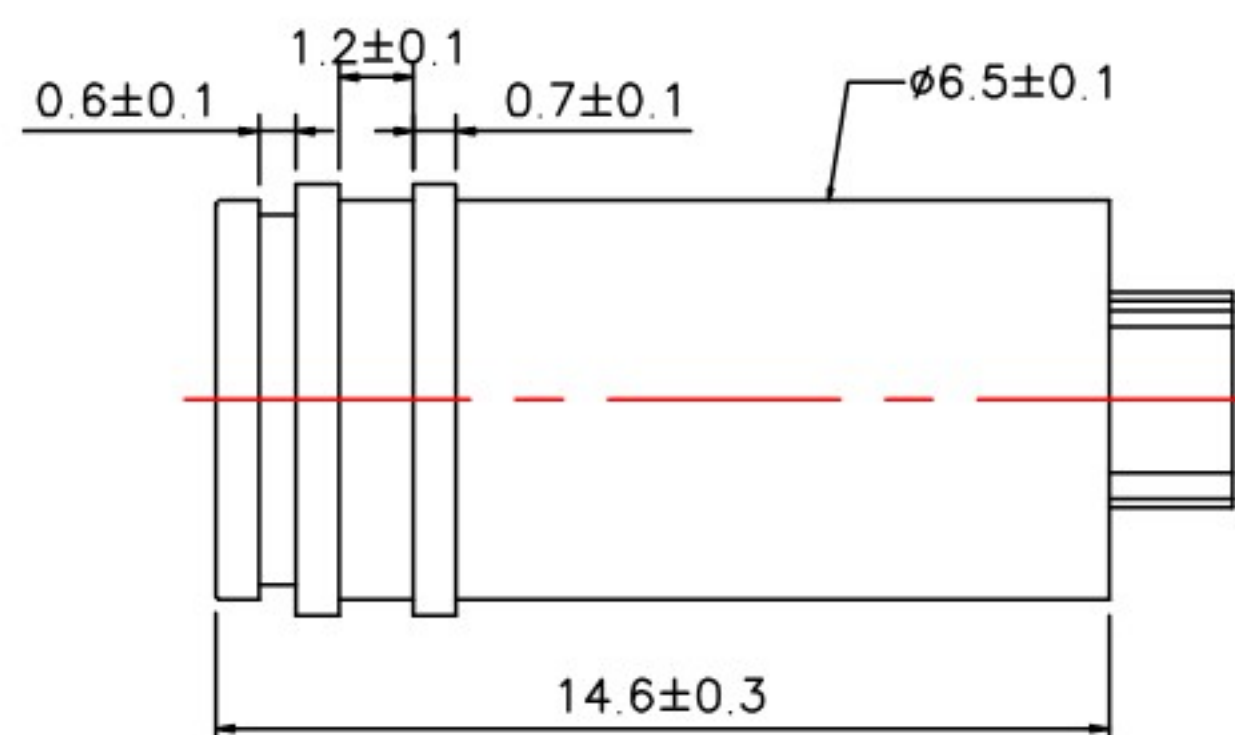
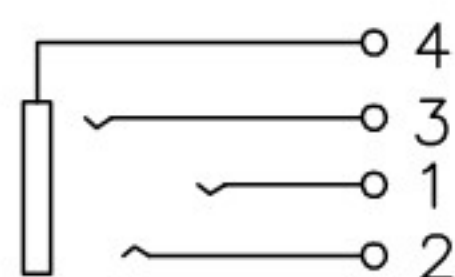
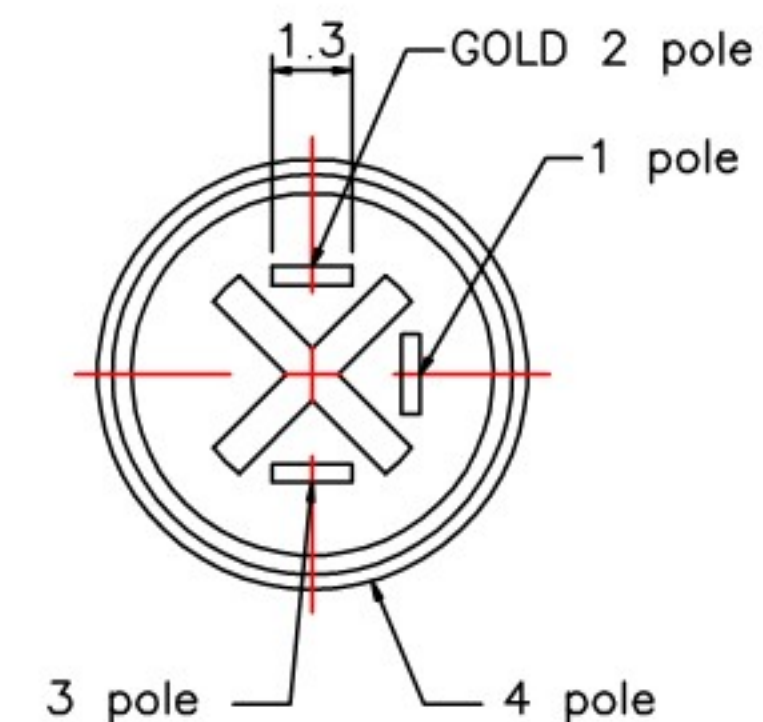
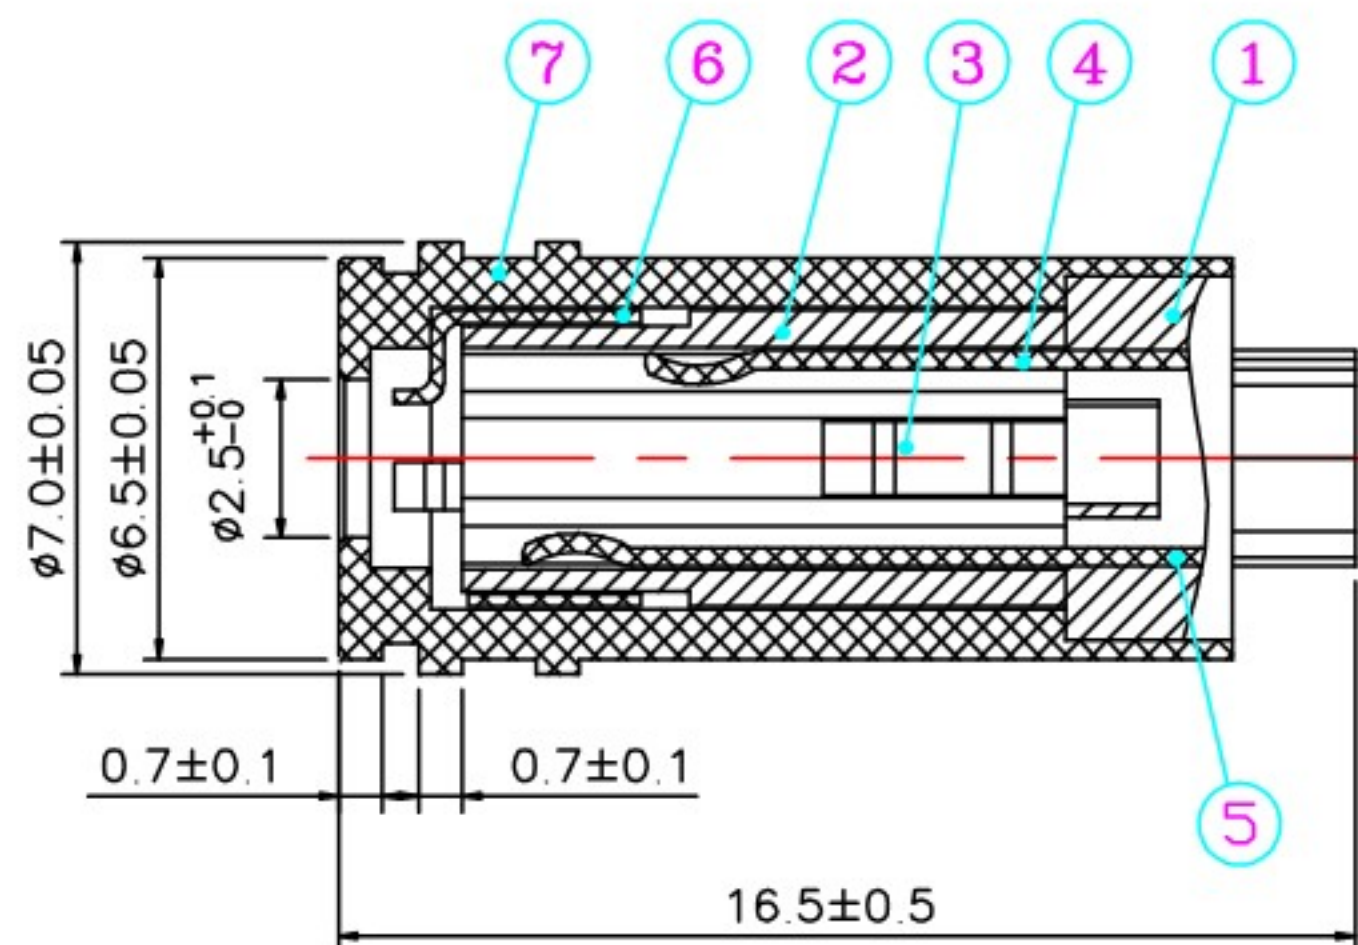


ROHS

版 本 REV	修正标记 REV.LTR	修正前 BEFORE REVISION	修正后 AFTER REVISION	签 名 SIGN	日 期 DATE
V1.0		新版制定		June	20181112

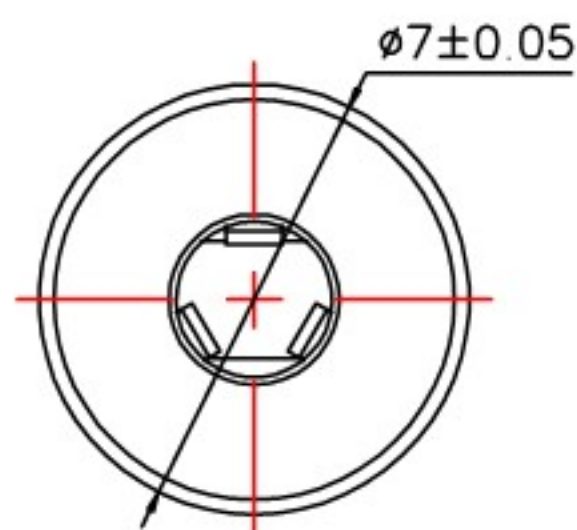

Technology Request:

1.Outlook:No burr, no hurt.

2.Electronic performance:

a:Insulation resistance: Above DC500V/100MΩ;

b:Endure voltage:AC500V at 1 minute;

c>Contact resistance:Under 30mΩ;

3.Insertion force & withdrawal force:0.3-3kgf.

4.Salt spray test:24H.

5.Meet RoHS.

6.Remark * is important specification.

单位 Unit	mm	一般公差 The general tolerance	7 7*14.6管	C3604	Ni 2-5um
			6 J254弹圈/弹片D	C5191	Ni 2-5um
比例 Scale	5:1	xx:±0.3	5 J254长片/弹片A	C5191	Ni 2-5um
			4 J254短片/弹片B	C5191	Ni50u"Au1u"
视图 Third angle projection		x.x:±0.1	3 J254U型片/弹片C	C5191	Ni 2-5um
			2 PLASTIC	POM	WHITE
		.xx:±0.05	1 PLASTIC	PBT	WHITE
			NO. PART	MATERIAL	PLATING

核准 APPROVED BY	校对 CHECKED BY	制图 DRAWN BY
June	杨义邦	李莹峰

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

规格 DESCRIPTION:	2.5 4POLE JACK $\phi 2.5 \times \phi 7.0 \times 16.5$
品名 P/N:	J25470
图号 DRAWN NO:	CP-06-0010